


**SAMPLE CATALOG NUMBER**

CB5182 - 1LF13(MVOLT) - BZ - XPS  
 Model Number      Lamping Option (Voltage)      Finish      Option


Model		Lamping Options		Finish		Diffuser Options		Options
Model Number	Dimensions			Housing	Accent Panel			
ST. GERMAIN <b>CB5180</b> <i>IDA</i>	W	5-1/2"	(140 mm)	1LF13	PTD	BU	• ABA • SL	DCC
	H	11-1/8"	(283 mm)	1N60T10	BA	BZ	• AR • SR	REM
	D	4"	(102 mm)		BB	• VG	• PP	XEM
	MC	5-1/2"	(140 mm)				Sandblasted glass standard	XPS
ST. GERMAIN <b>CB5182</b>	W	5-1/2"	(140 mm)	1LF13	PTD	BU	• ABA • SL	DCC
	H	11-1/8"	(283 mm)	1QF26	BA	BZ	• AR • SR	REM
	D	6"	(152 mm)	2N60	BB	• VG	• PP	XEM
	MC	5-1/2"	(140 mm)				Sandblasted glass standard	XPS
ST. GERMAIN <b>CB5184</b>	W	7"	(178 mm)	2LF13	PTD	BU	• ABA • SL	DCC
	H	14-1/8"	(359 mm)	2QF26	BA	BZ	• AR • SR	REM
	D	7-3/4"	(197 mm)	2N75	BB	• VG	• PP	XEM
	MC	7"	(178 mm)				Sandblasted glass standard	XPS
MIDLAND CRAFTS <b>CB5186</b> <i>IDA</i>	W	5-1/2"	(140 mm)	1LF13	PTD	BU	• ABA • SL	DCC
	H	11-1/8"	(283 mm)	1N60T10	BA	BZ	• AR • SR	REM
	D	4"	(102 mm)		BB	• VG	• PP	XEM
	MC	5-1/2"	(140 mm)				White acrylic standard	XPS
MIDLAND CRAFTS <b>CB5188</b>	W	5-1/2"	(140 mm)	1LF13	PTD	BU	• ABA • SL	DCC
	H	11-1/8"	(283 mm)	1QF26	BA	BZ	• AR • SR	REM
	D	6"	(152 mm)	2N60	BB	• VG	• PP	XEM
	MC	5-1/2"	(140 mm)				White acrylic standard	XPS
MIDLAND CRAFTS <b>CB5190</b>	W	7"	(178 mm)	2LF13	PTD	BU	• ABA • SL	DCC
	H	14-1/8"	(359 mm)	2QF26	BA	BZ	• AR • SR	REM
	D	7-3/4"	(197 mm)	2N75	BB	• VG	• PP	XEM
	MC	7"	(178 mm)				White acrylic standard	XPS

**LINE DRAWINGS**


ST. GERMAIN  
**CB5180**




ST. GERMAIN  
**CB5182 / CB5184**



MIDLAND CRAFTS  
**CB5186**



MIDLAND CRAFTS  
**CB5188 / CB5190**



Door Height = 7'  
 Ceiling Height = 9'  
 Silhouette Height = 6'



**ABBREVIATION KEY**

• Indicated Finish or Option is not available with XPS

**Dimensions**

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

**Lamping Options (Voltage)**

- LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
- QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
- N60 60w A-19, medium base, INC (120V)
- N60T10 60w T-10, medium base, INC (120V)
- N75 75w A-19, medium base, INC (120V)

Specify Voltage or MVOLT  
 MVOLT is a ballast that operates 120V through 277V

**Finishes (see inside back cover)**

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BU Brushed Copper
- BZ Brushed Bronze
- VG Verdigris Patina over Copper

**Diffuser Options (see inside back cover)**

- ABA Hand Painted Alabaster Alternative
- AR Arctic Crush Lumitor®
- PP Paper Leaf Lumitor®
- SL Silver Spun Lumitor®
- SR Saffron Taipei Lumitor®

Note: White acrylic diffuser is standard for CB5186, CB5188 and CB5190; Sandblasted glass diffuser is standard for CB5180, CB5182 and CB5184, unless other diffuser option is specified

**Options**

- DCC Damp clear coat required for all metal finishes in damp locations
- REM Remote emergency battery pack for fluorescent lampping, not available with 347V
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box), not available with 347V
- XPS Express 10 day shipment

**PHOTOMETRICS and BIM**


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

**Reports**

IES File Number	LER	Report	page
CB5180-1LF13	18	01990	406
CB5182-1LF13	18	01990	406
CB5182-1QF26	29	01989	406
CB5182-2N60	5	01991	407
CB5184-2QF26	30	08016	415
CB5184-2N75	6		
CB5186-1LF13	18	01990	406
CB5188-1LF13	18	01990	406
CB5188-1QF26	29	01989	406
CB5190-2QF26	30	08016	415
CB5190-2N75	6		

See report on indicated page for complete detail

**Candela Distribution**

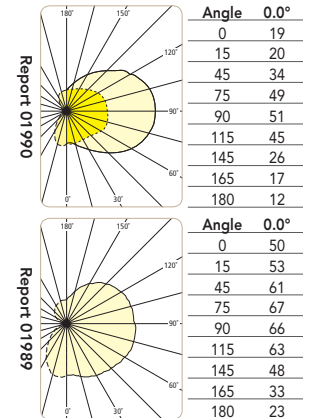

## ST. GERMAIN™ &amp; MIDLAND CRAFTS™

ST. GERMAIN  
CB5182-BZMIDLAND CRAFTS  
CB5188-BRZ-OBZ

## FEATURES

- 5 year product warranty
- ADA compliant (CB5180 and CB5186 only)
- Fabricated metal housing with internal reinforcing corner extrusions
- Diffuser accent panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Tempered sandblasted glass side, top and bottom panels (CB5180, CB5182, CB5184)
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated panels (CB5186, CB5188, CB5190)
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

## COMPANIONS



## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Custom window cutout in housing panels
- Increase or decrease housing height and/or width
- Silk screened logo on window panels
- Alternate lamping up to rated wattage listed
- Can accommodate Metal Halide lamping up to 70w with remote ballast
- Add fluorescent dimming ballast
- Fused circuit protection



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty