


SAMPLE CATALOG NUMBER

CM1720 - 2TF42(277V) - TW9016 - TW9016 - DIM-A
 Model Number Lamping Option (Voltage) Dish Finish Accent Finish Option


Model		Lamping Options		Finish		Options
Model Number	Dimensions			Dish	Accent	
CM1712	W 22" (559 mm)	2QF26		PTD		<ul style="list-style-type: none"> • DIM-A • DIM-L FUSE IEM XPS
	OAH 7-1/2" (191 mm)	※2TF42				
	RD 5-7/8" (149 mm)	2TF57				
	RL 20-1/8" (511 mm)	2TF70				
RW 12-1/8" (308 mm)						
CM1720	W 24" (610 mm)	2QF26		PTD	PTD • CB	<ul style="list-style-type: none"> • DIM-A • DIM-L FUSE IEM XPS
	OAH 6-5/8" (168 mm)	※2TF42		BA	BB PB	
	RD 5-7/8" (149 mm)	2TF57		BCA	• BCB • SN	
	RL 20-1/8" (511 mm)	2TF70		SNA		
RW 12-1/8" (308 mm)						
CM1724	W 24" (610 mm)	2QF26		PTD	PTD PB	<ul style="list-style-type: none"> • DIM-A • DIM-L FUSE IEM XPS
	OAH 6-5/8" (168 mm)	※2TF42		BA	• BCB • SN	
	RD 5-7/8" (149 mm)	2TF57		BCA	• CB	
	RL 20-1/8" (511 mm)	2TF70		SNA		
RW 12-1/8" (308 mm)						

LINE DRAWINGS



CM1712



CM1720



CM1724

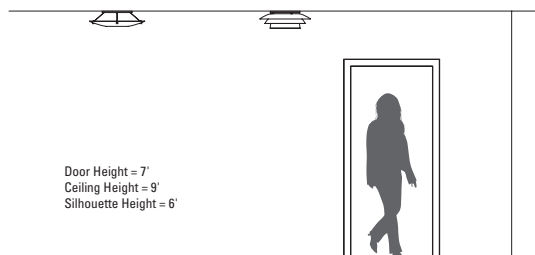

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed
- Note: DIM-A and DIM-L are wattage specific

Dimensions

- W Width
- OAH Overall Height
- RD Recessed Depth
- RL Recessed Length
- RW Recessed Width

Lamping Options (Voltage)

- QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
- ※TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
- ※TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
- ※TF42 42w triple, 4-pin GX24q-4 base, FLR (MVOLT; 347V)
- TF57 57w triple, 4-pin GX24q-5 base, FLR (MVOLT)
- TF70 70w triple, 4-pin GX24q-6 base, FLR (MVOLT)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BCA Brushed Chrome Alternative
- BCB Brushed Chrome
- CB Polished Chrome
- PB Polished Brass
- SN Satin Nickel
- SNA Satin Nickel Alternative

Options

- DIM-A Fluorescent dimming, Advance Mark 10, specify 120V or 277V
- DIM-L Fluorescent dimming, Lutron Compact SE, specify 120V or 277V (not available with 2TF57 or 2TF70 lamping)
- DCC Damp clear coat required for all metal finishes in damp locations
- FUSE Fusing, specify 120V or 277V
- IEM Integral emergency battery pack, specify 120V or 277V (up to 42w lamping with dry location)
- XPS Express 10 day shipment

OVATION™

INDOOR

DECORATIVE AND PERFORMANCE



CM1724-BCA-CB





CM1720-TW9016-TW9016



CM1712-TW9016

COMPANIONS



FEATURES

- 5 year product warranty
- Chandelier appearance for low ceiling applications
- Heavy gauge spun metal trim and rings
- Regressed high transmission flat prismatic glass lens
- Shallow 5-7/8" depth recessed housing rated for through-circuit wiring
- Recessed housing in stock and available for rough-in installation
- Hanger bars and hardware provided for complete installation
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent lamping
- High power factor electronic ballast

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Increase or decrease dish size
- Increase or decrease overall suspension height (CM1720 and CM1724)



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty

CEILING