



SAMPLE CATALOG NUMBER

CP4022 - 8QF26(MVOLT) - BCB - REM - OAH(30)
 Model Lamping Option (Voltage) Finish Option Option

Model		Lamping Options		Finish		Options	
Model Number	Dimensions						
CP4020	W 23-5/8" (600 mm)	8LF13	PTD • CB	• ABA	REM		
	OAH 27" (686 mm)	8TF26	BA PB	DCC	• TL		
	X 10" (254 mm)	4N100	BCA • SN	FUSE	XPS		
	NBS 24x9" (610x229 mm)		• BCB SNA	OAH			
CP4022	W 29-5/8" (752 mm)	8QF26	PTD • CB	• ABA	OAH		
	OAH 30" (762 mm)	※8TF42	BA PB	DCC	REM		
	X 10" (254 mm)	6N100	BCA • SN	• DIM-A	• TL		
	NBS 30x9" (762x229 mm)		• BCB SNA	• DIM-L	XPS		
CP4024	W 36-1/8" (918 mm)	8QF26	PTD • CB	• ABA	OAH		
	OAH 36" (914 mm)	※8TF42	BA PB	DCC	REM		
	X 12" (305 mm)	8TF70	BCA • SN	• DIM-A	• TL		
	NBS 36x11" (914x279 mm)	6N150	• BCB SNA	• DIM-L	XPS		
CP4026	W 44-7/8" (1140 mm)	※8TF42	PTD • CB	• ABA	FUSE		
	OAH 42" (1067 mm)	8TF70	BA PB	DCC	OAH		
	X 15-1/8" (384 mm)	8N150	BCA • SN	• DIM-A	REM		
	NBS 45x14" (1143x356 mm)		• BCB SNA	• DIM-L	XPS		

LINE DRAWINGS

CP4020 / CP4022 / CP4024 / CP4026

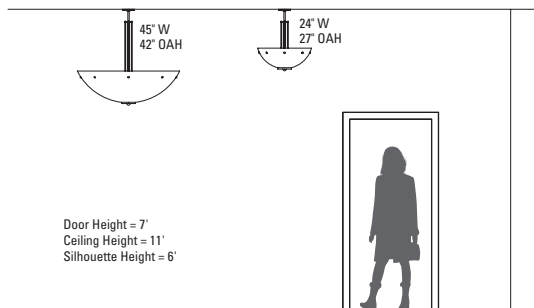

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

Dimensions

W	Width
OAH	Overall Height
X	Body Height
NBS	Nominal Bowl Size

Lamping Options (Voltage)

LF13	13w twin tube 4-pin, 2GX7 base, FLR	(MVOLT)
QF26	26w quad, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※TF26	26w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※TF32	32w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※TF42	42w triple, 4-pin GX24q-4 base, FLR	(MVOLT; 347V)
TF70	70w triple, 4-pin GX24q-6 base, FLR	(MVOLT)
N100	100w A-19, medium base, INC	(120V)
N150	150w A-21, medium base, INC	(120V)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
• BCB	Brushed Chrome
BCA	Brushed Chrome Alternative
• CB	Polished Chrome
PB	Polished Brass
• SN	Satin Nickel
SNA	Satin Nickel Alternative

Options

- ABA Hand Painted Alabaster Alternative (diffuser option)
- DCC Damp clear coat required for all metal finishes in damp locations
- DIM-A Fluorescent dimming, Advance Mark 10, specify 120V or 277V
- DIM-L Fluorescent dimming, Lutron Compact SE, specify 120V or 277V (not available with TF70)
- FUSE Fusing, specify 120V or 277V
- OAH Overall height variation from standard. Include desired height in inches. (ex. OAH(30) will produce an overall fixture height of 30")
- REM Remote emergency battery pack for fluorescent lampping, not available with 347V (see page 435 for detailed information)
- TL Top lens, tempered prismatic glass, not available with dimming
- XPS Express 10 day shipping

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CP4020-8LF13	46	01228	404
CP4020-4N100	16	36388	431
CP4022-8QF26	45	01111	404
CP4022-8TF42	57	07987	414
CP4022-6N100	15	01227	404
CP4024-8TF70	72	07988	414
CP4024-6N150	16	36387	431
CP4026-8TF70	72	07988	414
CP4026-8N150	16		

See report on indicated page for complete detail

Candela Distribution

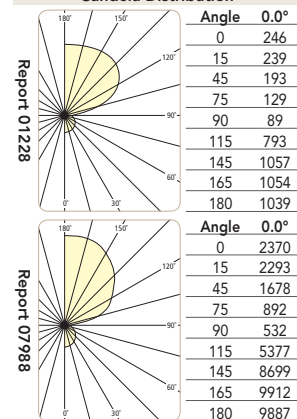

APOLLO™

INDOOR

DECORATIVE AND PERFORMANCE



CP4022-BCB

COMPANIONS

<p>Apollo</p>  <p>Wall P 144</p>	<p>Ovation</p>  <p>Ceiling P 240</p>	<p>Apollo</p>  <p>Pendant P 296</p>
--	---	--

FEATURES

- 5 year product warranty
- Heavy gauge metal construction and trim work
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lampping
- Use coated lamps for incandescent applications
- High power factor electronic ballast (fluorescent lampping)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Larger scale acrylic diffuser
- Alternate lampping up to rated wattage listed
- Accommodate pulse-start metal halide lampping
- Wire for multi-level switching
- Mix and match accents and trim from other product designs
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Construct to accept XEM option
- Weather tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations. Metal finishes require DCC (damp clear coat) for 5 year warranty

PENDANT