



SAMPLE CATALOG NUMBER

OW1604 - 1FS21(MVOLT) - BSIL - XPS
 Model Number Lamping Option (Voltage) Finish Option

Model		Lamping Options		Finish	Options
Model Number	Dimensions				
OW1600 ADA	W 6-1/8" (156 mm)	1FS14	PTD	FUSE HPC XPS	
	H 25-1/2" (648 mm)	1FS24			
	D 1" (25 mm)				
	RH 24-1/4" (616 mm)				
	RD 3-3/8" (86 mm)				
OW1602 ADA	W 6-1/8" (156 mm)	1F017	PTD	FUSE HPC IEM XPS	
	H 27" (686 mm)				
	D 1" (25 mm)				
	RH 25-3/4" (654 mm)				
	RD 3-3/8" (86 mm)				
RD w/IEM 5" (127 mm)					
OW1604 ADA	W 6-1/8" (156 mm)	1FS21	PTD	FUSE HPC XPS	
	H 37-1/2" (953 mm)	1FS39			
	D 1" (25 mm)				
	RH 36-3/8" (924 mm)				
	RD 3-3/8" (86 mm)				
OW1606 ADA	W 6-1/8" (156 mm)	1FS28	PTD	FUSE HPC XPS	
	H 49" (1245 mm)	1FS54			
	D 1" (25 mm)				
	RH 47-7/8" (1216 mm)				
	RD 3-3/8" (86 mm)				
OW1608 ADA	W 6-1/8" (156 mm)	1FO32	PTD	FUSE HPC IEM XPS	
	H 51-1/4" (1302 mm)				
	D 1" (25 mm)				
	RH 50-3/8" (1280 mm)				
	RD 3-3/8" (86 mm)				
RD w/IEM 5" (127 mm)					
OW1610 ADA	W 6-1/8" (156 mm)	1FS35	PTD	FUSE HPC XPS	
	H 61" (1549 mm)	1FS80			
	D 1" (25 mm)				
	RH 59-7/8" (1521 mm)				
	RD 3-3/8" (86 mm)				

LINE DRAWINGS

OW1600 / OW1602 / OW1604 / OW1606 / OW1608 / OW1610

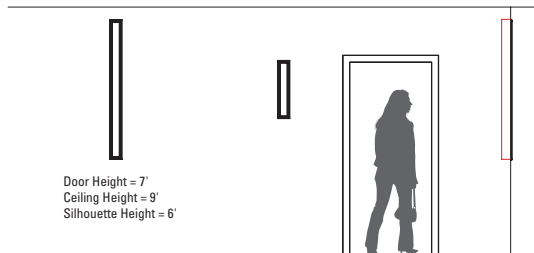

ABBREVIATION KEY

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- RH Recessed Height
- RD Recessed Depth
- RD w/IEM Recessed Depth with IEM option

Lamping Options (Voltage)

- FO17 17w T-8, medium bi-pin base, FLR (MVOLT)
- FO25 25w T-8, medium bi-pin base, FLR (MVOLT)
- FO32 32w T-8, medium bi-pin base, FLR (MVOLT)
- FO40 40w T-8, medium bi-pin base, FLR (MVOLT)
- FS14 14w T-5, mini bi-pin base, FLR (MVOLT)
- FS21 21w T-5, mini bi-pin base, FLR (MVOLT)
- FS24 24w T-5/HO, mini bi-pin base, FLR (MVOLT)
- FS28 28w T-5, mini bi-pin base, FLR (MVOLT)
- FS35 35w T-5, mini bi-pin base, FLR (MVOLT)
- FS39 39w T-5/HO, mini bi-pin base, FLR (MVOLT)
- FS54 54w T-5/HO, mini bi-pin base, FLR (MVOLT; 347V)
- FS80 80w T-5/HO, mini bi-pin base, FLR (MVOLT)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)

Options

- FUSE Fusing, specify 120V or 277V
- HPC Housing for poured concrete
- IEM Integral emergency battery pack, 4° F / -20° C minimum, specify 120V or 277V (not available with HPC option)
- XPS Express 10 day shipping

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
OW1600-1FS24		26	
OW1602-1FO17		29	
OW1604-1FS39	28	08051	415
OW1606-1FS54		29	
OW1608-1FO32		34	
OW1610-1FS80		28	

See report on indicated page for complete detail

Candela Distribution



Door Frame Hinge Detail



VISAGE™

OUTDOOR




DECORATIVE AND PERFORMANCE

WALL



OW1604-BSIL

COMPANIONS

<p>Capitol</p>  <p>Wall P 220</p>	<p>Visage</p>  <p>Wall / Ceiling P 168</p>	<p>Visage</p>  <p>Wall / Ceiling P 166</p>
--	---	---

FEATURES

- 5 year product warranty
- ADA compliant
- 3/16" thick white acrylic diffuser F1 rated, UV stable, UL-94 flame class rated
- Extruded aluminum frame
- Oven cured no VOC acrylic powder coat
- Fluorescent lampping
- High power factor electronic ballast, 0° F / -18° C starting temperature
- Shallow 3-3/8" recessed housing in stock and available for rough-in installation
- Rated for insulation contact (except 1FS80)
- Removable cam-action, hinged frame for ease of maintenance
- Easy relamping
- Vertical or horizontal mounting
- UL wet location listed

SUGGESTED VARIATIONS

- Specialty paint finishes to match architectural detail
- Alternate fluorescent linear lampping

