


INSTALLATION INSTRUCTIONS


Model: **CM2082, CM2084**
Fixture Family: **JASPER**
Document Description: Installation Instructions for
JASPER Series Luminaires

 **VISA LIGHTING**
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting 2016

JASPER

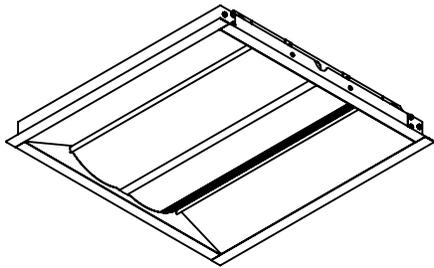

CM2082 (2x2)

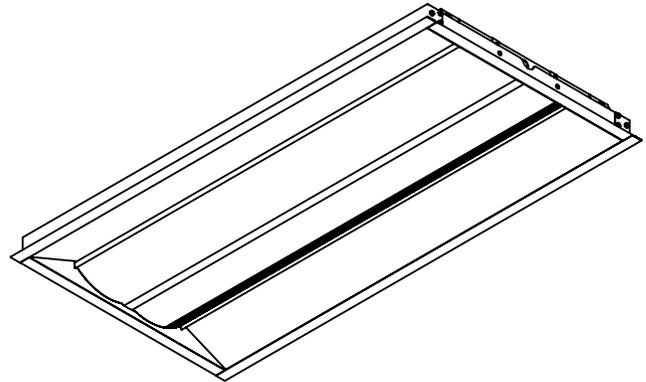

CM2084 (2x4)

PAGE 2: 2x2 T-GRID INSTALLATION

PAGE 3: 2x4 T-GRID INSTALLATION

PAGE 4: 2x2 SRI SHEETROCK INSTALLATION

PAGE 5: 2x4 SRI SHEETROCK INSTALLATION

PAGE 6: 2x2 INTERNAL EMERGENCY DRIVER INSTALLATION

PAGE 7: INSTALLATION OF THE EARTHQUAKE CLIPS

Drawing: 762300XX

Rev: A

Sheet: 1 of 7

Eng: CLD

Date Drawn: 03/19/18


- !** When using electrical equipment, basic safety precautions should always be followed, including the following:
- Read all instructions carefully before installing and save for future use.
 - Make sure all connections are in accordance with the National Electrical Code and local regulations.
 - To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
 - Service should be performed by qualified personnel.
 - These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

INSTALLATION INSTRUCTIONS

Model: **CM2082, CM2084**
Fixture Family: **JASPER**
Document Description: Installation Instructions for
JASPER Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

2x2 CEILING GRID INSTALLATION

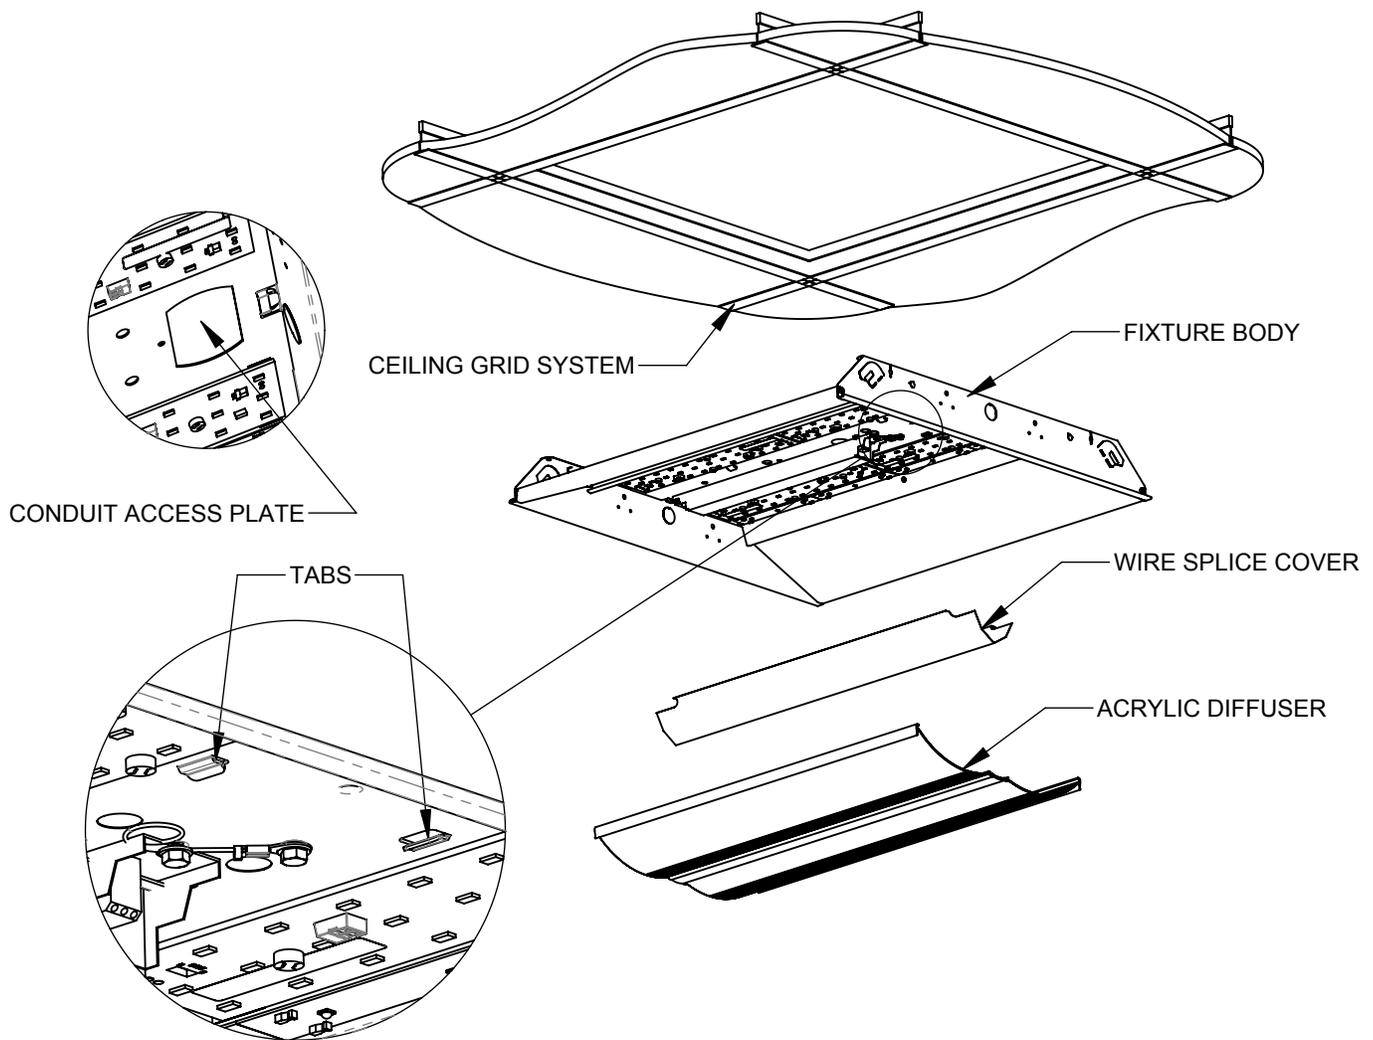

1. Remove the diffuser from fixture body by applying pressure to the center of diffuser and pulling the tabs on one side of the diffuser and in a downward direction. This will release the diffuser from the fixture.
2. Remove center wire splice cover by lightly squeezing until the flanges can be release from the tabs on the fixture body.
3. Remove conduit access plate from fixture body and secure it to the flexible conduit in the ceiling.
4. Install the fixture in the T-Bar ceiling grid system by lifting the fixture through the opening and lowering it in place onto the grid system.
5. Follow local codes for securing fixture as needed to structure above.
6. Reattach conduit access plate with conduit to fixture body and make electrical connections in accordance to all local and national codes.
7. Taking caution not to pinch any wires, reinstall center wire splice cover to fixture body.
8. Reinstall lens to fixture body.

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Drawing: 762300XX

Rev: A

Sheet: 2 of 7

Eng: CLD


Date Drawn: 03/19/18

INSTALLATION INSTRUCTIONS

Model: **CM2082, CM2084**
Fixture Family: **JASPER**
Document Description: Installation Instructions for
JASPER Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

2x4 CEILING GRID INSTALLATION

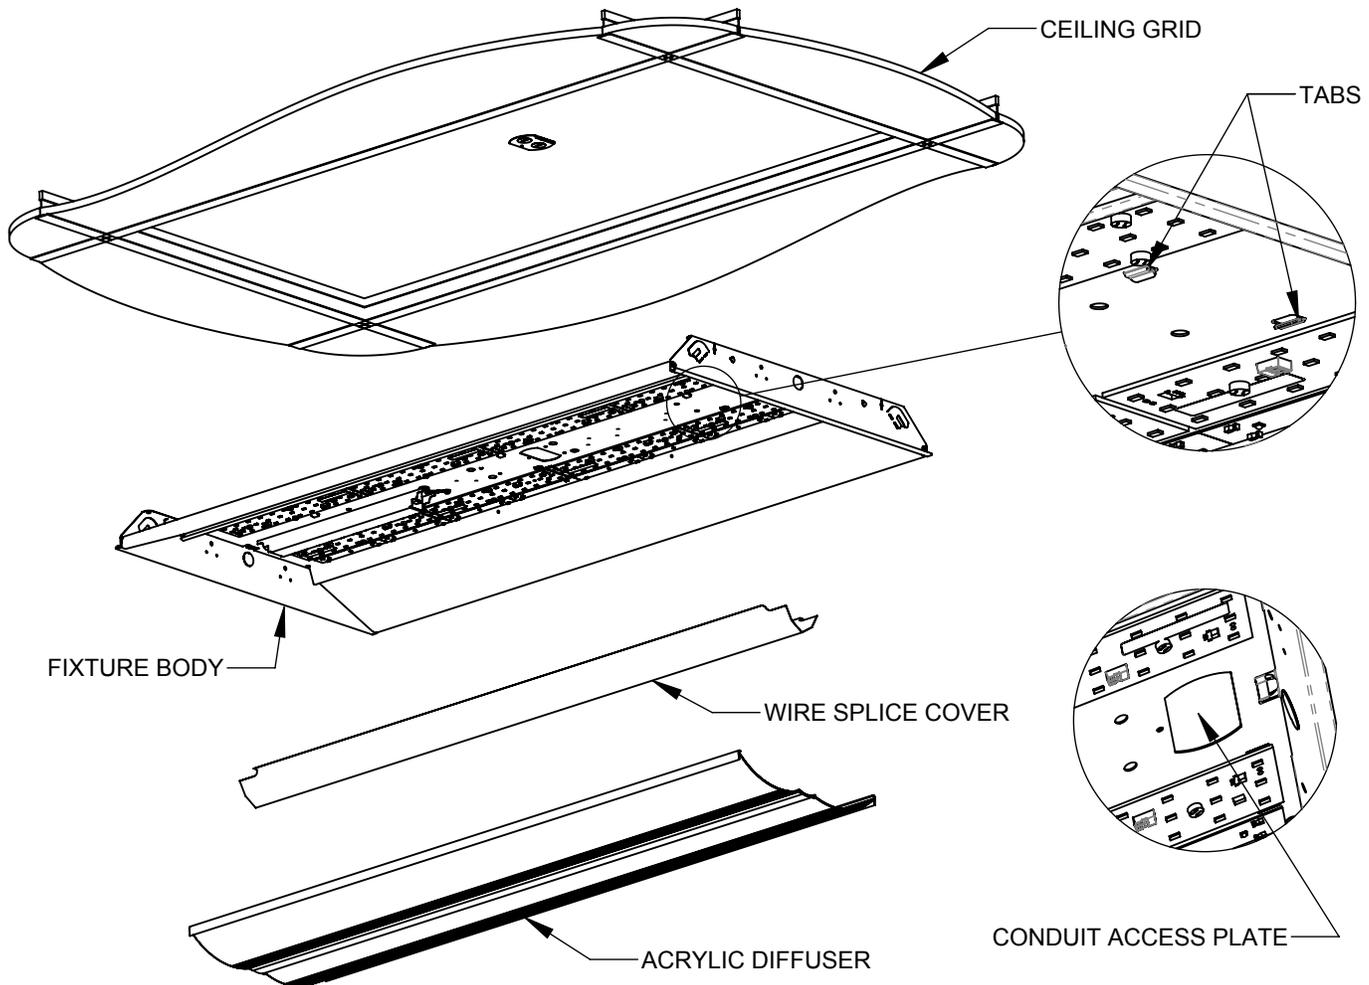

1. Remove the diffuser from fixture body by applying pressure to the center of diffuser and pulling the tabs on one side of the diffuser and in a downward direction. This will release the diffuser from the fixture.
2. Remove center wire splice cover by lightly squeezing until the flanges can be release from the tabs on the fixture body.
3. Remove conduit access plate from fixture body and secure it to the flexible conduit in the ceiling.
4. Install the fixture in the T-Bar ceiling grid system by lifting the fixture through the opening and lowering it in place onto the grid system.
5. Follow local codes for securing fixture as needed to structure above.
6. Reattach conduit access plate with conduit to fixture body and make electrical connections in accordance to all local and national codes.
7. Taking caution not to pinch any wires, reinstall center wire splice cover to fixture body.
8. Reinstall lens to fixture body.

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Drawing: 762300XX

Rev: A

Sheet: 3 of 7

Eng: CLD


Date Drawn: 03/19/18

INSTALLATION INSTRUCTIONS



Model: **CM2082, CM2084**
Fixture Family: **JASPER**
Document Description: Installation Instructions for
JASPER Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

2x2 SHEETROCK INSTALLATION

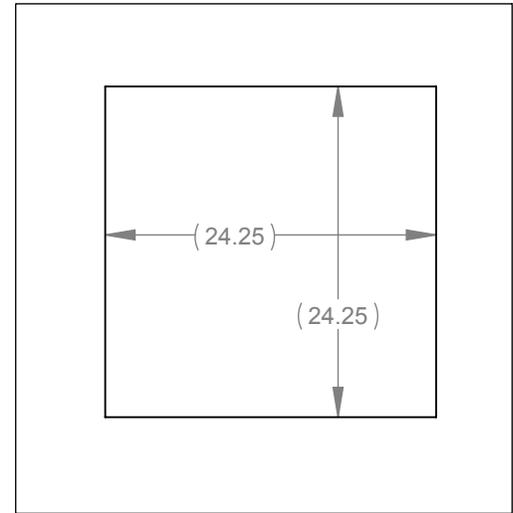

HOLE SIZE FOR CUTOUT IN SHEETROCK

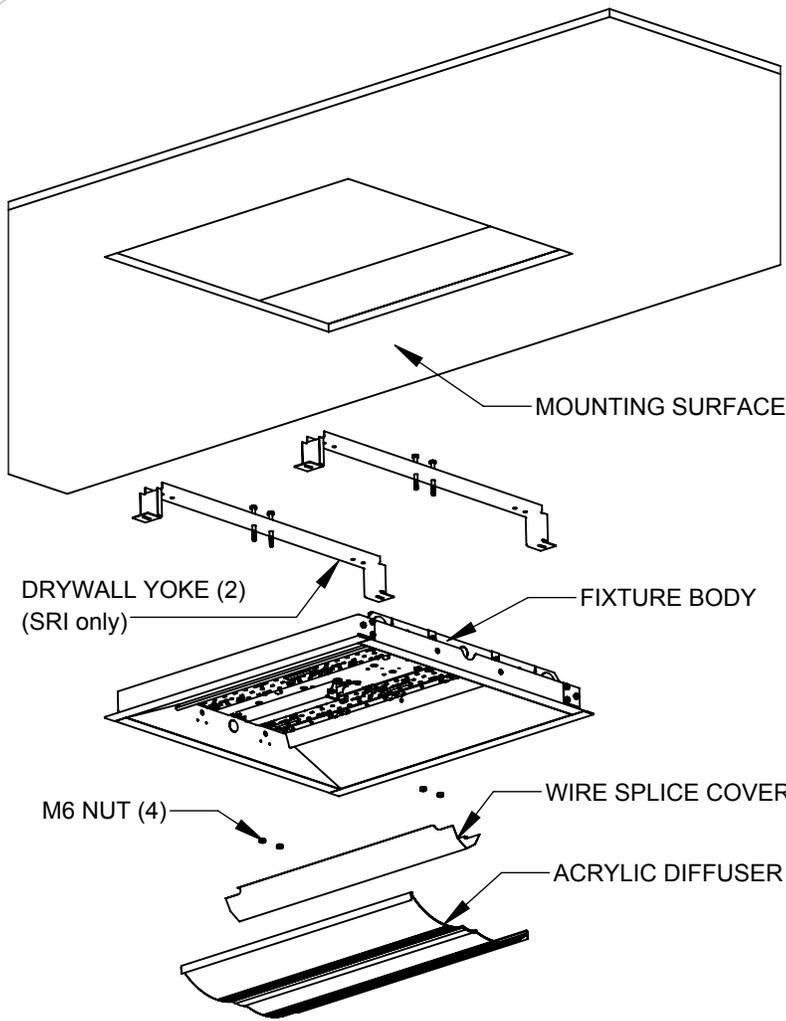

CONDUIT ACCESS PLATE

1. Remove the diffuser from fixture body by applying pressure to the center of diffuser and pulling the tabs on one side of the diffuser and in a downward direction. This will release the diffuser from the fixture.
2. Remove center wire splice cover by lightly squeezing until the flanges can be release from the tabs on the fixture body.
3. Remove conduit access plate from fixture body and secure it to the flexible conduit in the ceiling.
4. Install the fixture in the T-Bar ceiling grid system by lifting the fixture through the opening and lowering it in place onto the grid system.
5. Follow local codes for securing fixture as needed to structure above.
6. Reattach conduit access plate with conduit to fixture body and make electrical connections in accordance to all local and national codes.
7. Taking caution not to pinch any wires, reinstall center wire splice cover to fixture body.
8. Reinstall lens to fixture body.

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Drawing: 762300XX

Rev: A

Sheet: 4 of 7

Eng: CLD


Date Drawn: 03/19/18

INSTALLATION INSTRUCTIONS

Model: **CM2082, CM2084**
Fixture Family: **JASPER**
Document Description: Installation Instructions for
JASPER Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

2x4 SHEETROCK INSTALLATION

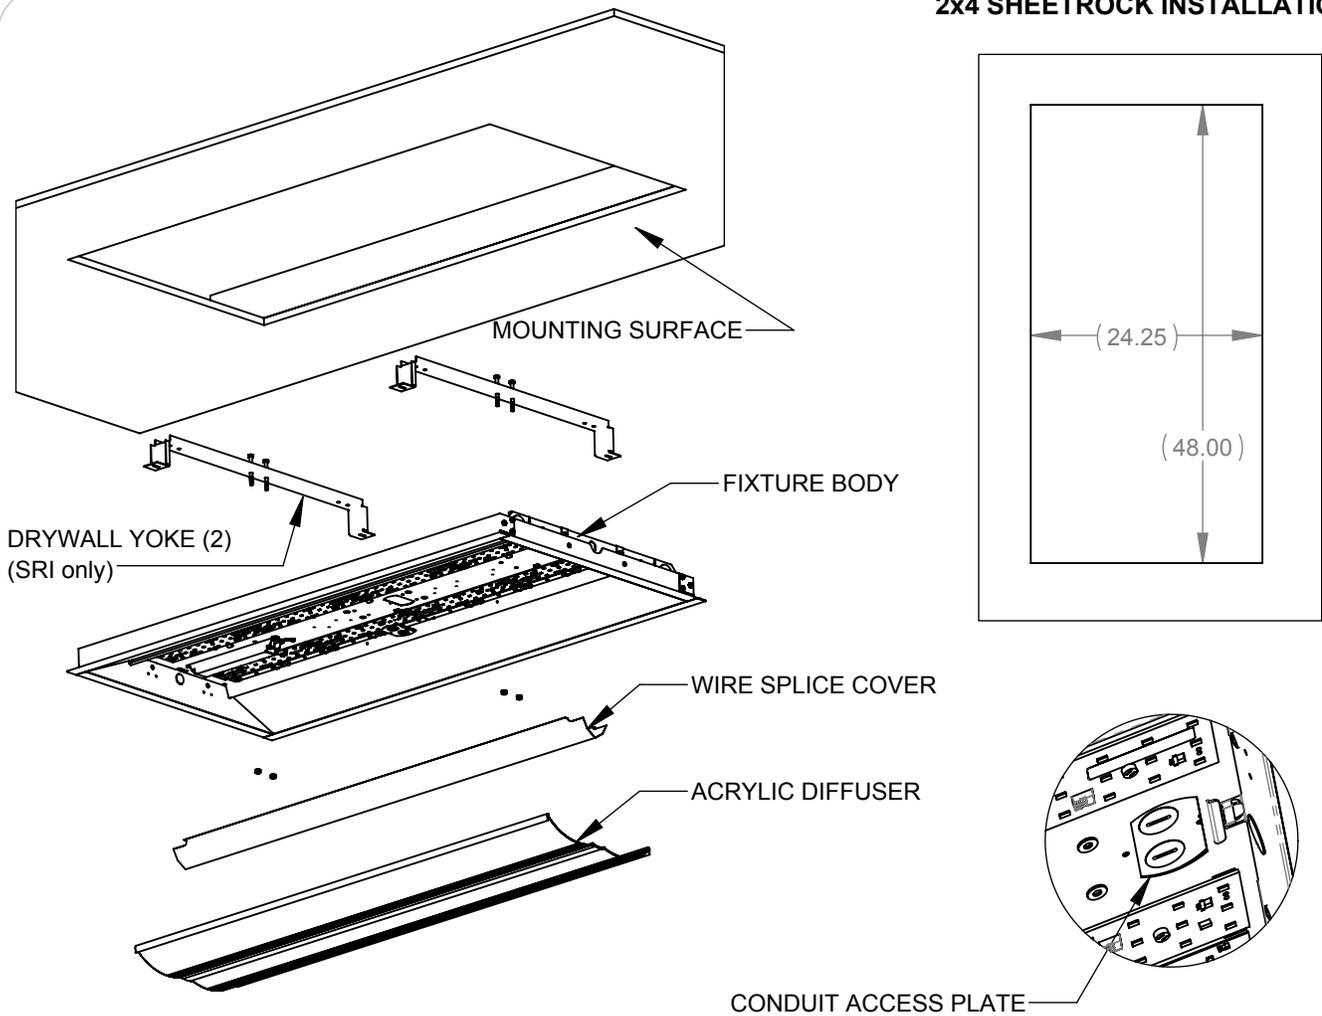

1. Remove the diffuser from fixture body by applying pressure to the center of diffuser and pulling the tabs on one side of the diffuser and in a downward direction. This will release the diffuser from the fixture.
2. Remove center wire splice cover by lightly squeezing until the flanges can be release from the tabs on the fixture body.
3. Remove conduit access plate from fixture body and secure it to the flexible conduit in the ceiling.
4. Install the fixture in the T-Bar ceiling grid system by lifting the fixture through the opening and lowering it in place onto the grid system.
5. Follow local codes for securing fixture as needed to structure above.
6. Reattach conduit access plate with conduit to fixture body and make electrical connections in accordance to all local and national codes.
7. Taking caution not to pinch any wires, reinstall center wire splice cover to fixture body.
8. Reinstall lens to fixture body.

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Drawing: 762300XX

Rev: A

Sheet: 5 of 7

Eng: CLD

Date Drawn: 03/19/18


INSTALLATION INSTRUCTIONS

Model: **CM2082, CM2084**
Fixture Family: **JASPER**
Document Description: Installation Instructions for
JASPER Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

INTERNAL EMERGENCY DRIVER (IEM) INSTALLATION

1. Remove IEM cover screws, and remove the IEM cover assembly.
2. Remove 1 of the 2 knockouts in the cover. **Do not remove both!** Install the conduit connector.
3. Insert the conduit through the conduit connector. Tighten screw on connector to secure the conduit.
4. Make electrical connections in accordance to local and national codes.
5. Reinstall IEM assembly cover by angling the assembly so the tabs on the cover lock into place with the tabs on the housing.
6. Secure with the IEM cover screws.
7. Refer to pages 2 or 4 for the type of mounting surface installation.

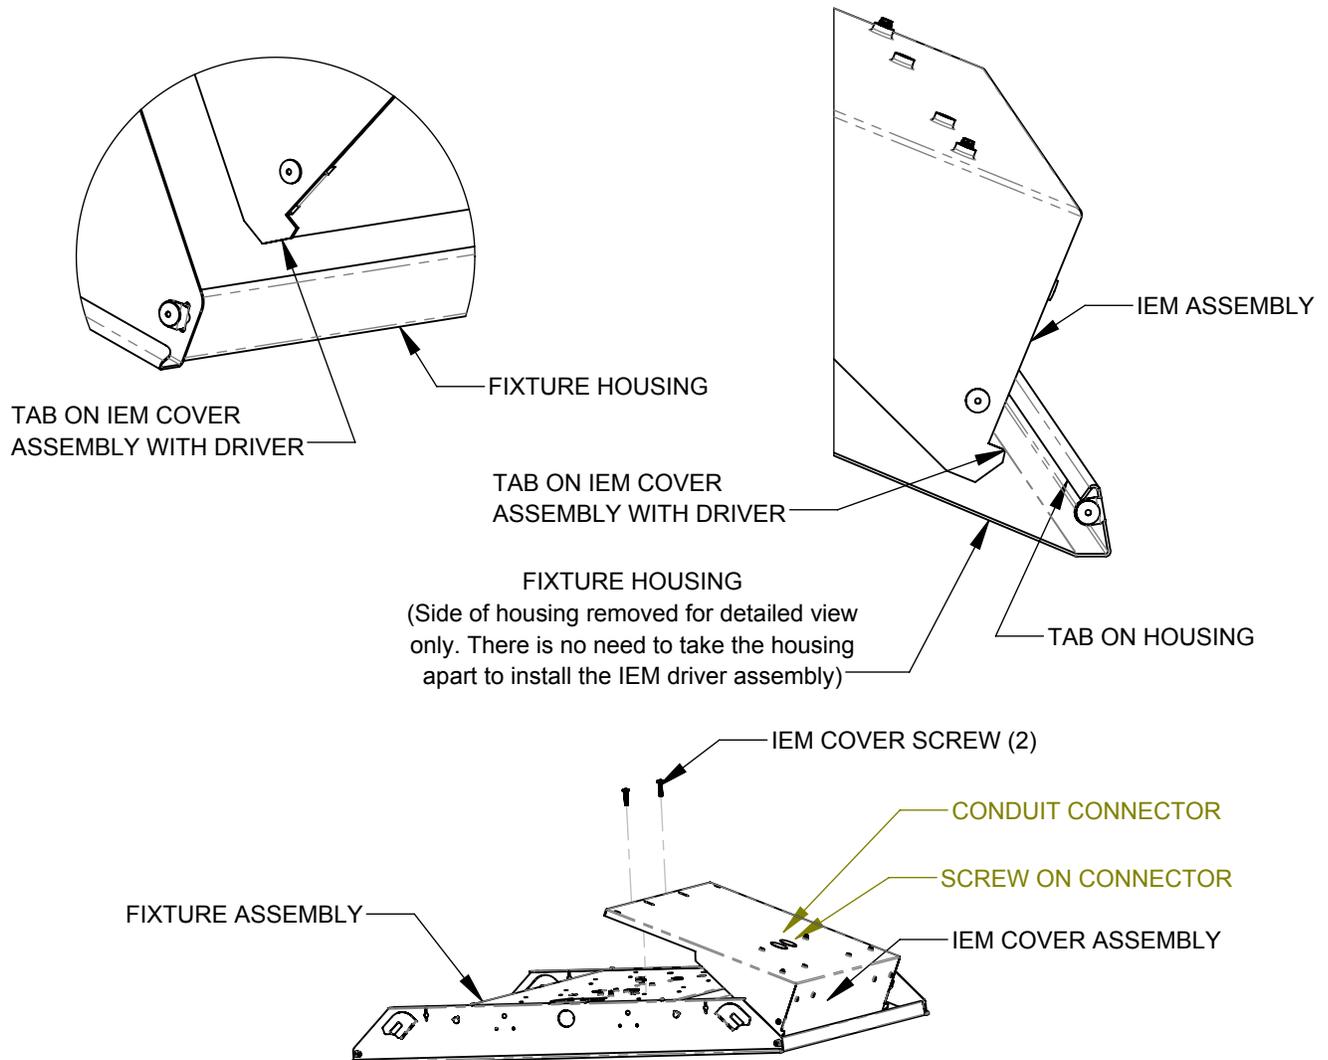

Drawing: 762300XX

Rev: A

Sheet: 6 of 7

Eng: CLD

Date Drawn: 03/19/18

When using electrical equipment, basic safety precautions should always be followed, including the following:


- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

INSTALLATION INSTRUCTIONS

Model: **CM2082, CM2084**
Fixture Family: **JASPER**
Document Description: Installation Instructions for
JASPER Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

INSTALLATION OF EARTHQUAKE CLIPS

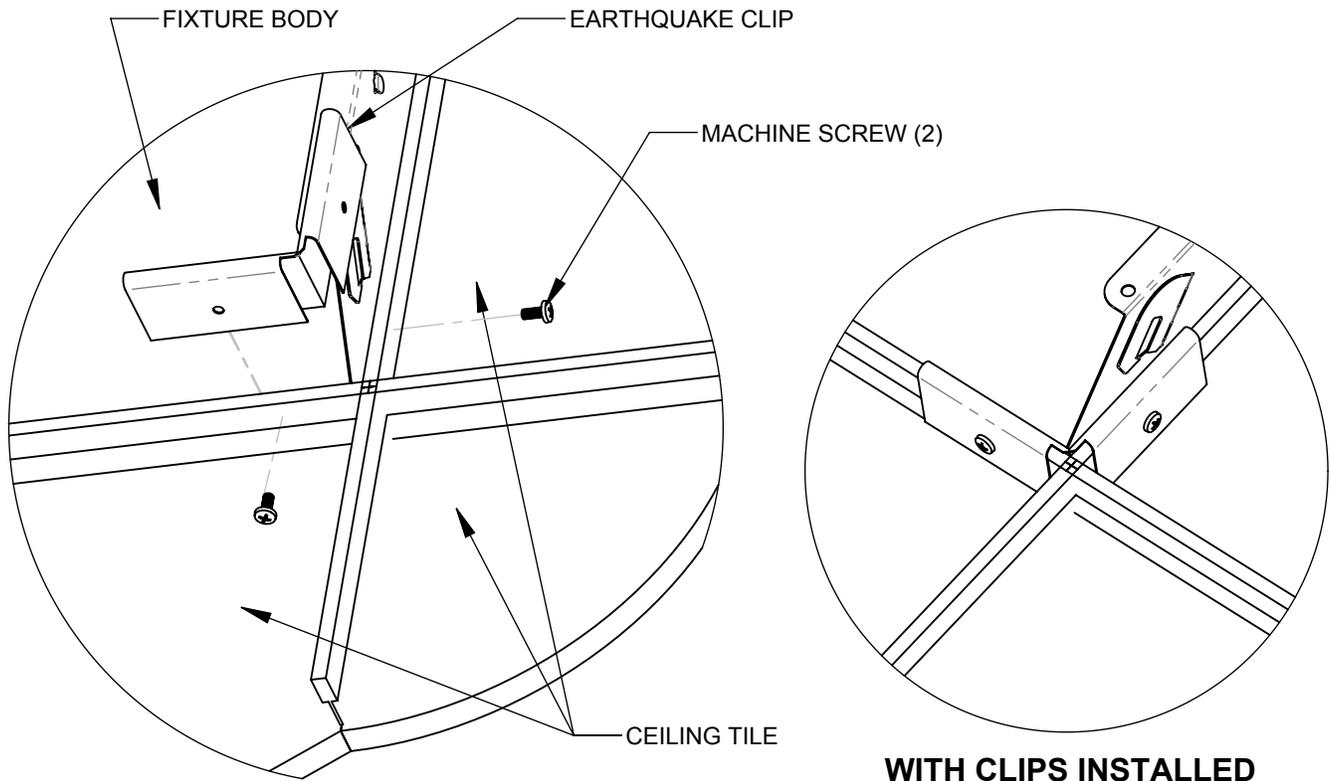

INSTALLATION OF CLIPS

NOTE: THERE IS NO NEED TO REMOVE THE FIXTURE TO INSTALL THE EARTHQUAKE CLIPS

1. ONCE FIXTURE HAS BEEN INSTALLED INTO THE CEILING GRID, REMOVE THE CEILING TILES THAT SURROUND THE FIXTURE.
2. GENTLY BEND THE CLIP TO FORM A 90° ANGLE.
3. SLIDE CLIP OVER T-GRID IN OPPOSITE CORNERS OF THE FIXTURE.
4. INSTALL PROVIDED MACHINE SCREWS INTO THE T-GRID.
5. REINSTALL CEILING TILES.

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.