CB6315 PILA™



Visalighting.com/products/Plla

Type: Project: Location:






DIMENSIONS

Depth is measured from wall to front of fixture

W = WidthH = Height D = Depth


7-1/8" (181 mm) W (737 mm) Н 29" D (102 mm)




FEATURES

- Integral driver
- Mounts to standard electrical junction box (by others) with provided hardware
- Heavy gauge fabricated metal backboxSolid metal accent bars and bracket
- 1/8" thick white acrylic diffuser with matte finish
 - UV stable
 - UL-94 HB Flame Class rated
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp location. Not recommended for exterior applications

RELATIVE SCALE DRAWING



PHOTOMETRICS












ADA Compliant

5 Year Warranty



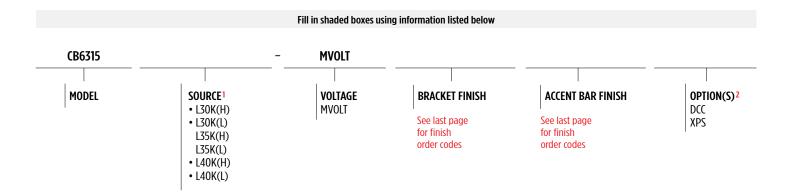

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	ССТ	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	3000	25
• L30K(L)	3000K	1900	15
L35K(H)	3500K	3000	25
L35K(L)	3500K	2000	15
• L40K(H)	4000K	3100	25
• L40K(L)	4000K	2000	15

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OPTIONS² (Multiple Selections Allowed)

▲ Option availability may be interdependent with Other Options

	the state of the s
DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

CB6315 PILA (cont.)



SUGGESTED VARIATIONS

· Horizontal mount

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)



Alternative Metal Finishes (Premium)



Metal Finish (Premium)

