

CB6860 THEO™

Single Rod Sconce


VisaLighting.com/products/Theo

Type: _____ Project: _____ Location: _____




DIMENSIONS

Depth is measured from wall to front of fixture

X = Body Height DIA = Diameter H = Height D = Depth WT = Weight


X	9-3/4" (248 mm)
DIA	1-5/8" (41 mm)
D	4" (102 mm)
H	11-1/4" (286 mm)
WT	≤ 1 lb

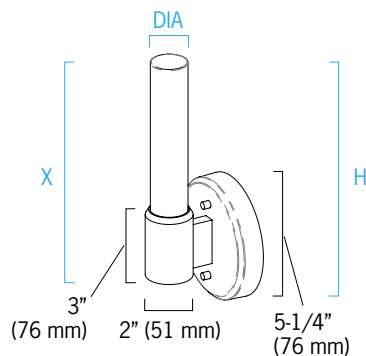


FEATURES

- Integral driver, suitable for 0-10V or phase-cut dimming
- Optional 90CRI
- Mounts to 4x4 octagonal junction box (by others). Wall canopy is 5-1/4" dia. Mount fixture vertically
- Optional remote driver (RMD)
- Unique transparent acrylic light rod with light-conducting properties for uniform illumination throughout the entire rod surface, can be mounted with rod pointing up or down
- Eco-friendly, lightweight spun aluminum material in wall canopy and housing
- Non-VOC powder coat or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING

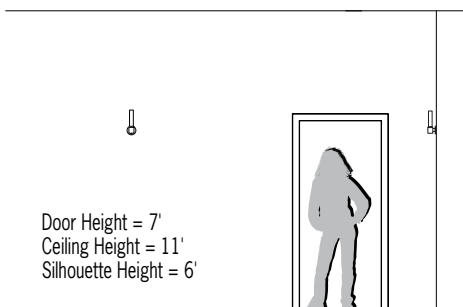

PHOTOMETRICS



ETL Listed

5 Year Warranty

CB6860 THEO (cont.)

Single Rod Sconce



Fill in shaded boxes using information listed below

CB6860		MVOLT				
MODEL	SOURCE ¹ L30K L35K L40K	SOURCE OPTION ² 90CRI	VOLTAGE MVOLT	FINISHES See last page for finish order codes	DRIVER ³ OPTION RMD	OPTION ⁴ DCC
		Minimum 80CRI is standard if 90CRI option is not selected			Integral driver unless remote driver (RMD) option is selected	

SOURCE¹ (Select one)

Minimum 80CRI, within 3-step MacAdam; 0-10V or phase-cut dimmable

Source	CCT	Delivered Lumens	Power/Watts
L30K	3000K	850	8
L35K	3500K	850	
L40K	4000K	900	

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L90 (reported)	>55,000 hrs
----------------	-------------

SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 18%)
-------	--

DRIVER OPTION³



Integral driver is standard if RMD option is not selected

RMD	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC); canopy is painted white
-----	---

OPTION⁴

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
-----	---

REMOTE DRIVER (RMD) INFORMATION

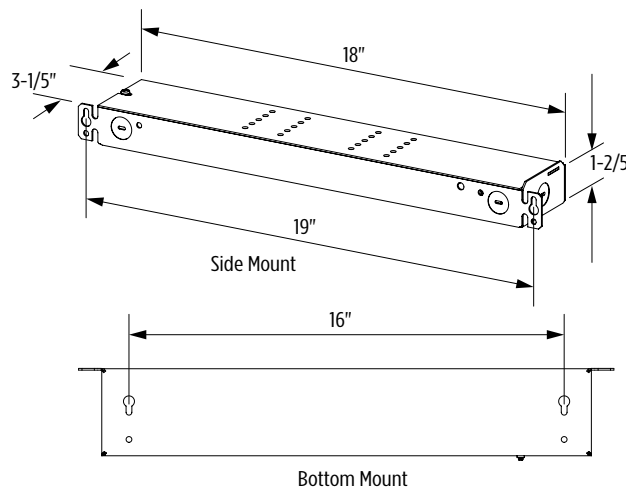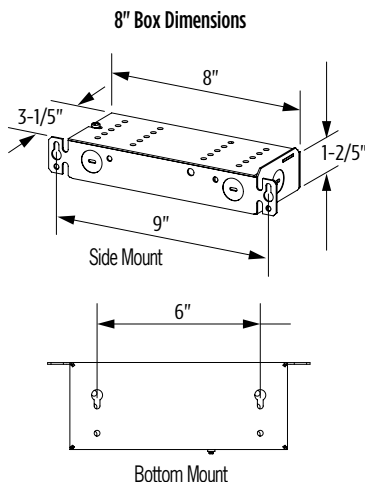

Maximum Recommended Remote Wiring Distance from RMD to fixture canopy

- 12GA 190 ft
- 14GA 120 ft
- 16GA 75 ft
- 18GA 45 ft
- 20GA 30 ft

Remote driver boxes have knockouts for conduit connections

CB6860 THEO (cont.)

Single Rod Sconce



THEO PRODUCT FAMILY

- CP6860-13 – 13" Pendant
- CP6860-24 – 24" Pendant
- CB6860 – Single Rod Sconce
- CB6862 – Double Rod Sconce

SUGGESTED VARIATIONS

- Custom colors
- Alternate mA settings

See [Visalighting.com/products/Theo](https://visalighting.com/products/Theo) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

			
BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
			
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)


BA Brushed Aluminum