### CM1980-W SYMMETRY<sup>™</sup> 23" Overbed — White

Project:

VisaLighting.com/products/Symmetry


**VISA LIGHTING** 

Location:




#### DIMENSIONS

Type:

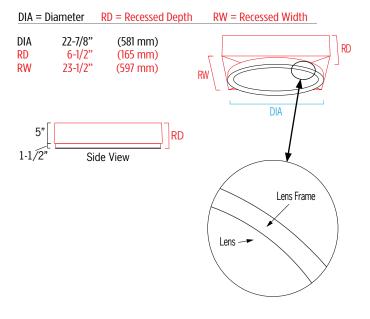


#### **RELATIVE SCALE DRAWING**

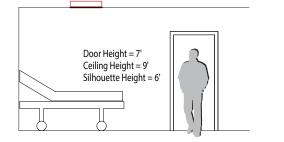

#### **FEATURES**

- Integral driver located within the housing and accessible from below the ceiling
- Low voltage patient control (LVPC-DIM) switching interface option for pillow speaker/nurse call systems
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Remote emergency driver
- Chicago Plenum certified (suspended grid mount only)
- Acrylic lens and aluminum housing
- Suitable for drywall/sheetrock or T-bar grid system (see installation instructions)
- Not suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications


#### PHOTOMETRICS






## CM1980-W SYMMETRY (cont.) 23" Overbed – White

### VISA LIGHTING



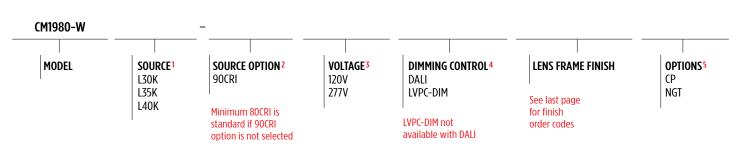

#### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1% Minimum 80CRI, within 3-step MacAdam

Source	ССТ	D	Max Power			
		Ambient	Exam	Combined	(Watts)	
L30K	3000K	4200	6800	10900		
L35K	3500K	4400	7000	11200	124	
L40K	4000K	4500	7100	11500		

Note: Fixture provided with separate ambient and exam circuits

#### SOURCE OPTION<sup>2</sup>

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected							
90CRI Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)							

#### DIMMING CONTROL OPTION<sup>4</sup> (Select one)

Dimmable 0-10V to 1% is standard if DALI option is not selected

• Option availability may be interdependent with Voltage, Source or Other Options

DALI	Control via DALI protocol, dimming to minimum 1%
LVPC-DIM	Integral Low Voltage patient controller interface. Not compatible with DALI option

#### OPTIONS<sup>5</sup> (Multiple selections allowed)

СР	Chicago Plenum Certified (suspended grid installation only)
NGT	Night light (amber)

VOLTAGE<sup>3</sup> (Select one)

120V	120VAC, 50/60 Hz
277V	277VAC, 50/60 Hz

Illuminance (Fc) Head of bec								
102	104	106	106	104	103			
105	107	109	109	i07	105			
108	iio	112	Ť12	110	108			
iio	ίīz	<b>1</b> 14	<b>1</b> 14	Ť12	109			
iio	πīz	<b>1</b> 14	<b>1</b> 13	ţin	109			
106	<b>1</b> 08	110	110	108	106			
101	103	i05	104	103	100			
94	<b>9</b> 6	<b>9</b> 7	<b>9</b> 7	<del>9</del> 6	94			
<b>*</b> 6	* 87	* 89	* 88	* 87	<b>*</b> 6			
<b>7</b> 8	<b>7</b> 9	80	<b>*</b> 0	<sup>†</sup> 9	<del>1</del> 77			
<b>6</b> 9	<del>7</del> 0	ħ	ħ	70	<del>6</del> 9			
<b>6</b> 4	<del>6</del> 5	<b>6</b> 6	<b>6</b> 6	66	<b>6</b> 5			
A.v	_ 05 0		Foot	of bed				

Average = 95.9 Maximum = 114 Minimum = 64.3 Avg/Min Ratio = 1.5 Max/Min Ratio = 1.8

# CM1980-W SYMMETRY (cont.) 23" Overbed – White



#### SYMMETRY PRODUCT FAMILY

Behavioral Health –	CM1976-W — 45"				
Overbed	CM1986-W — 23"				
Behavioral Health –	CM1978-W — 45"				
General Use	CM1988-W — 23"				
Behavioral Health –	СМ1978-Т — 45"				
Tunable	СМ1982-Т — 23"				
Overbed	CM1970-W — 45" CM1980-W — 23"				
General Use	CM1972-W — 45" CM1982-W — 23"				
Tunable	СМ1972-Т — 45" СМ1988-Т — 23"				

See Visalighting.com/Products/Symmetry for more information

#### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are available upon request. For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.