

# CM1982-W SYMMETRY™

23" General Use — White



[VisaLighting.com/products/Symmetry](https://VisaLighting.com/products/Symmetry)




Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_



## DIMENSIONS

DIA = Diameter RD = Recessed Depth RW = Recessed Width


DIA	22-7/8"	(581 mm)
RD	6-1/2"	(165 mm)
RW	23-1/2"	(597 mm)

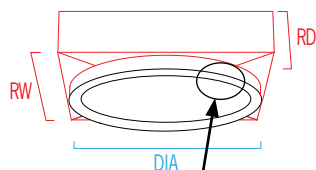


## FEATURES

- Integral driver located within the housing and accessible from below the ceiling
- Chicago Plenum certified (**suspended grid mount only**)
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Remote emergency driver
- Suitable for drywall/sheetrock or T-bar grid system (see installation instructions)
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

## RELATIVE SCALE DRAWING

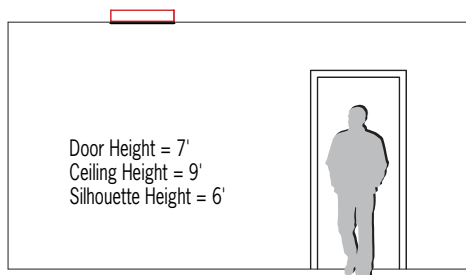

## PHOTOMETRICS

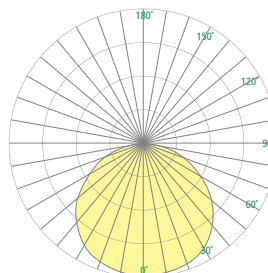

# CM1982-W SYMMETRY (cont.)

23" General Use — White



Fill in shaded boxes using information listed below

CM1982-W			-	MVOLT			
MODEL	SOURCE <sup>1</sup> L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	SOURCE OPTION <sup>2</sup> 90CRI		VOLTAGE MVOLT	DIMMING CONTROL OPTION <sup>3</sup> DALI	LENS FRAME FINISH	OPTIONS <sup>4</sup> CP REM
		Minimum 80CRI is standard if 90CRI option is not selected				See last page for finish order codes	

## SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%  
Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	4900	61
L30K(L)	3000K	2900	35
L35K(H)	3500K	5000	61
L35K(L)	3500K	3000	35
L40K(H)	4000K	5100	61
L40K(L)	4000K	3000	35

347V available upon request

## VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

## SOURCE OPTION<sup>2</sup>

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)
-------	---

## DIMMING CONTROL OPTION<sup>3</sup>

Dimmable 0-10V to 1% is standard if DALI option is not selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

DALI	Control via DALI protocol, dimming to minimum 1%
------	--

## OPTIONS<sup>4</sup> (Multiple selections allowed)

CP	Chicago Plenum Certified (suspended grid installation only)
REM	Remote emergency driver, 10W output for 90 minutes

# CM1982-W SYMMETRY (cont.)

23" General Use — White



## SYMMETRY PRODUCT FAMILY

Behavioral Health – Overbed	CM1976-W — 45" CM1986-W — 23"
Behavioral Health – General Use	CM1978-W — 45" CM1988-W — 23"
Behavioral Health – Tunable	CM1978-T — 45" CM1982-T — 23"
Overbed	CM1970-W — 45" CM1980-W — 23"
General Use	CM1972-W — 45" CM1982-W — 23"
Tunable	CM1972-T — 45" CM1988-T — 23"

See [Visalighting.com/Products/Symmetry](https://visalighting.com/Products/Symmetry) for more information

## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red