### FIFTH AVENUE™

### CP2010-CBL CP2012-CBL CP2014-CBL Aircraft Cable Suspension



Visalighting.com/products/Fifth-Avenue

Type: Project: Location:	
--------------------------	--





#### DIMENSIONS 1,5


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(24) indicates an overall fixture height of 24"

#### OAH must be specified

W = Width OAH = Standard Overall Height X = Body Height Y = Rim Height

	CP2010-CBL	CP2012-CBL	CP2014-CBL
W	26-1/4" (667 mm)	34" (864 mm)	44" (1118 mm)
OAH	30" (762 mm)	36" (914 mm)	48" (1219 mm)
X	5-1/2" (140 mm)	5-3/4" (146 mm)	6" (152 mm)
Υ		2-1/2" (64 mm)	


Structural blocking required for CP2012-CBL and CP2014-CBL




#### **FEATURES**

- Integral driver
- Mounts to standard 4" octagonal junction box (CP2010-CBL)
- Mounts through 4" octagonal by 2-1/8" deep electrical junction box (by others) to structural blocking (by others) with provided hardware for ceiling slopes up to 45° from horizontal (CP2012-CBL & CP2014-CBL)
- Heavy gauge spun metal housing with upper lensed aperture to provide a luminous glow to reduce ceiling contrast
- Thermally formed 1/8" thick white acrylic diffuser with matte finish UV stable
- Optional 1/8" thick impact resistant polycarbonate white lens cover
- No VOC powder coat paint; low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

#### **RELATIVE SCALE DRAWING**



#### **PHOTOMETRICS**








**ETL Listed** 

## FIFTH AVENUE

## CP2010-CBL\_CP2012-CBL\_CP2014-CBL Aircraft Cable Suspension



#### Fill in shaded boxes using information listed below

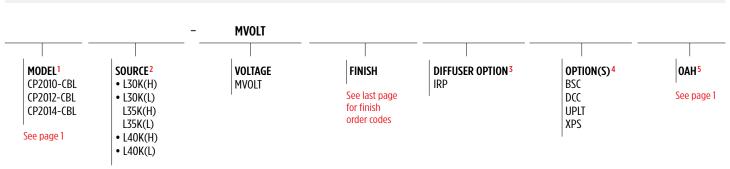

SOURCE<sup>2</sup> (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

**VOLTAGE** 

**MVOLT** 120-277V, 50/60 Hz

		CP2010-CBL		CP2012-CBL		CP2014-CBL	
SOURCE	ССТ	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	7200	72	15400	142	30700	291
• L30K(L)	3000K	5000	47	10700	93	21400	191
L35K(H)	3500K	7400	72	15900	142	31700	291
L35K(L)	3500K	5100	47	11100	93	22100	191
• L40K(H)	4000K	7600	72	16200	142	32300	291
• L40K(L)	4000K	5200	47	11300	93	22600	191

#### DIFFUSER OPTION3

Diffuser is Matte White Acrylic unless IRP diffuser option is selected

IRP	Impact resistant polycarbonate white diffuser
INT	Impact resistant polycarbonate white unitaser

#### OPTIONS<sup>4</sup> (Multiple Selections Allowed)

▲ Option availability may be interdependent with Other Options

BSC	Black power cord (standard cord is white)	
DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)	
UPLT	Lensed aperature in housing produces % uplight: 5.6% (CP2010-CBL), 4.9% (CP2012-CBL), 4.7% (CP2014-CBL)	
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS	

#### **CORD & CABLE DETAIL**



#### STRUCTURAL BLOCKING DETAIL

Required for CP2012-CBL and CP2014-CBL



### FIFTH AVENUE

# CP2010-CBL\_CP2012-CBL\_CP2014-CBL Aircraft Cable Suspension

### VISA LIGHTING

#### FIFTH AVENUE PRODUCT FAMILY

- CM2012 26" Surface Ceiling Mount
- CP2012-STM 34" Stem
- CP2010-CBL 26" Aircraft Cable
- CP2014-CBL 44" Aircraft Cable
- CP2010-STM 26" Stem
- CP2014-STM 44" Stem
- CP2012-CBL 34" Aircraft Cable

See <u>Visalighting.com/products/Fifth-Avenue</u> for more information

#### SUGGESTED VARIATIONS

- Custom colors
- · Decrease lumens

#### **FINISHES**

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)



#### Alternative Metal Finishes (Premium)



Metal Finish (Premium)



This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.