

# FIFTH AVENUE™

CP2010-STM\_CP2012-STM\_CP2014-STM  
Stem Suspension



[Visalighting.com/products/Fifth-Avenue](http://Visalighting.com/products/Fifth-Avenue)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_



## DIMENSIONS <sup>1,5</sup>


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.  
Example - OAH(24) indicates an overall fixture height of 24"

**▲ OAH must be specified**

W = Width OAH = Standard Overall Height X = Body Height Y = Rim Height

	CP2010-STM	CP2012-STM	CP2014-STM
<b>W</b>	26-1/4" (667 mm)	34" (864 mm)	44" (1118 mm)
<b>OAH</b>	30" (762 mm)	36" (914 mm)	48" (1219 mm)
<b>X</b>	5-1/2" (140 mm)	5-3/4" (146 mm)	6" (152 mm)
<b>Y</b>	2-1/2" (64 mm)		


Structural blocking required for CP2012-STM and CP2014-STM

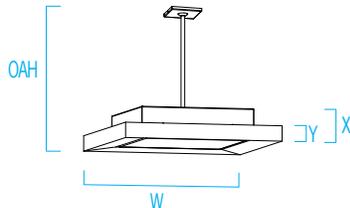


## FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Mounts to standard 4" octagonal junction box (**CP2010-STM**)
- Mounts through 4" octagonal by 2-1/8" deep electrical junction box (by others) to structural blocking (by others) with provided hardware for ceiling slopes up to 45° from horizontal (**CP2012-STM & CP2014-STM**)
- Heavy gauge spun metal housing with upper lensed aperture to provide a luminous glow to reduce ceiling contrast
- Thermally formed 1/8" thick white acrylic diffuser with matte finish
  - UV stable
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat for metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

## RELATIVE SCALE DRAWING

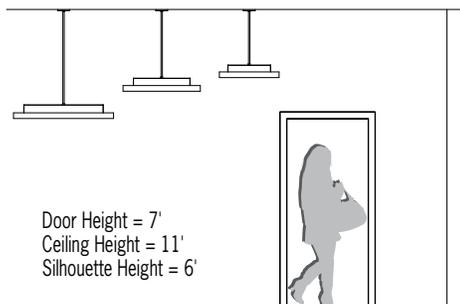

## PHOTOMETRICS

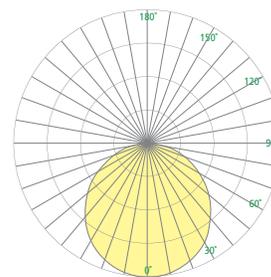

# FIFTH AVENUE (cont.)

## CP2010-STM\_CP2012-STM\_CP2014-STM

### Stem Suspension



Fill in shaded boxes using information listed below

<b>MVOLT</b>						
<b>MODEL<sup>1</sup></b> CP2010-STM CP2012-STM CP2014-STM  See page 1	<b>SOURCE<sup>2</sup></b> <ul style="list-style-type: none"> <li>• L30K(H)</li> <li>• L30K(L)</li> <li>• L35K(H)</li> <li>• L35K(L)</li> <li>• L40K(H)</li> <li>• L40K(L)</li> </ul>	<b>VOLTAGE</b> MVOLT	<b>FINISH</b>  See last page for finish order codes	<b>DIFFUSER OPTION<sup>3</sup></b> IRP	<b>OPTION(S)<sup>4</sup></b> DCC SSV UPLT XPS	<b>OAH<sup>5</sup></b>  See page 1

SOURCE<sup>2</sup> (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

VOLTAGE

<b>MVOLT</b>	120-277V, 50/60 Hz
--------------	--------------------

SOURCE	CCT	CP2010-STM		CP2012-STM		CP2014-STM	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	7200	72	15400	142	30700	291
• L30K(L)	3000K	5000	47	10700	93	21400	191
L35K(H)	3500K	7400	72	15900	142	31700	291
L35K(L)	3500K	5100	47	11100	93	22100	191
• L40K(H)	4000K	7600	72	16200	142	32300	291
• L40K(L)	4000K	5200	47	11300	93	22600	191

DIFFUSER OPTION<sup>3</sup>

Diffuser is Matte White Acrylic unless IRP diffuser option is selected

<b>IRP</b>	Impact resistant polycarbonate white diffuser
------------	---


OPTIONS<sup>4</sup> (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options

<b>DCC</b>	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
<b>SSV</b>	Square Stem Sleeve
<b>UPLT</b>	Lensed aperture in housing produces % uplight: 5.6% (CP2010-STM), 4.9% (CP2012-STM), 4.7% (CP2014-STM)
<b>XPS</b>	Express 10 day shipping. Items marked with a bullet (●) are not available with XPS

STRUCTURAL BLOCKING DETAIL

Required for CP2012-STM and CP2014-STM

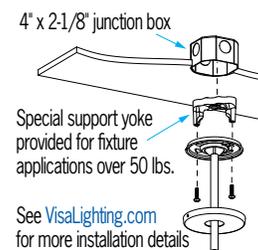

SQUARE SLEEVE DETAIL



# FIFTH AVENUE (cont.)

## CP2010-STM\_CP2012-STM\_CP2014-STM

### Stem Suspension



#### FIFTH AVENUE PRODUCT FAMILY

- CP2012 26" Surface Ceiling Mount
- CP2010-CBL 26" Aircraft Cable
- CP2010-STM 26" Stem
- CP2012-CBL 34" Aircraft Cable
- CP2012-STM 34" Stem
- CP2014-CBL 44" Aircraft Cable
- CP2014-STM 44" Stem

#### SUGGESTED VARIATIONS

- Custom colors
- Decrease lumens

See [Visalighting.com/products/Fifth-Avenue](https://www.visalighting.com/products/Fifth-Avenue) for more information

#### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://www.visalighting.com/finishes)

##### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red

##### Alternative Metal Finishes (Premium)

<b>BBA</b> Brushed Brass Alternative	<b>BCA</b> Brushed Chrome Alternative	<b>BUA</b> Brushed Copper Alternative	<b>BZA</b> Brushed Bronze Alternative
<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>PRA</b> Pewter Alternative	<b>RBA</b> Rustic Brass Alternative	<b>SNA</b> Satin Nickel Alternative

##### Metal Finish (Premium)

<b>BA</b> Brushed Aluminum