CYLINDER[™] CP4349 and CP4351 - Cross Bar Accents

Visalighting.com/products/Cylinder

Type:

Project:

Location:



DIMENSIONS^{1, 7}

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(192) indicates an overall fixture height of 192"


A OAH must be specified

W = Width OAH = Standard Overall Height X	= Body Height
---	---------------

	CP4349	CP4351
W	10" (254 mm)	12" (305 mm)
OAH	42" (1067 mm)	48" (1219 mm
X	25" (635 mm)	28" (711 mm)




RELATIVE SCALE DRAWING



FEATURES

- Integral driver
- Wired for dual circuit operation (bodylight/downlight)
- Spun downlight baffle trim, painted white with downlight option (bottom is solid white aluminum when no downlight is specified)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- Extruded 1/8" thick white acrylic diffuser with matte finish
 UV stable
 - UL-94 HB Flame Class rated
- No VOC powder coat paint finish; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS




Body Light



CYLINDER (cont.) CP4349 and CP4351 - Cross Bar Accents

VISA LIGHTING

Fill in shaded boxes using information listed below

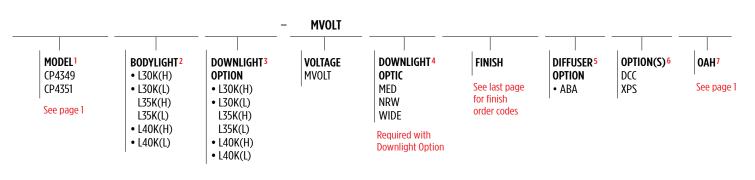

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

	-	CP4	349	CP4351			
SOURCE	сст	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)		
• L30K(H)	3000K	4400	48	5600	61		
• L30K(L)			22	2500	27		
L35K(H)			48	5600	61		
L35K(L)	3500K	1900	22	2500	27		
• L40K(H)	I) 4000K 4500		48	5800	61		
• L40K(L)	4000K	2000	22	2600	27		

DOWNLIGHT OPTION³

Fixture bottom is solid if no downlight is specified

SOURCE	ССТ	Delivered Lumens	Power (Watts)		
• L30K(H)	3000K	2700	28		
• L30K(L)	3000K	1300	14		
L35K(H)	3500K	2800	28		
L35K(L)	3500K	1400	14		
• L40K(H)	4000K	2800	28		
• L40K(L)	4000K	1400	14		

VOLTAGE

MVOLT 120-277V, 50/60 Hz

DOWNLIGHT OPTIC⁴

Required For Downlight

MED	48° beam
NRW	34° beam
WIDE	84° beam

DIFFUSER OPTION³

Diffuser is matte white acrylic unless ABA option is selected

ABA Hand Painted Alabaster Alternative

ABA

OPTIONS⁶ (Multiple selections allowed)

A Option availability may be interdependent with Other Options
--

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

SUGGESTED VARIATIONS

Add accents

Increase length

Custom Colors

CYLINDER (cont.) CP4349 and CP4351 - Cross Bar Accents

CYLINDER PRODUCT FAMILY

- CP4341 25" Pin Accent
- CP4343 28" Pin Accent
- CP4345 25" Double Bars
- CP4347 28" Double Bars
- CP4349 25" Cross Bars
- CP4351 28" Cross Bars

See Visalighting.com/products/Cylinder for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red

Alternative Metal Finishes (Premium) BBA Brushed Brass BCA Brushed BUA Brushed BZA Brushed BA Alternative Chrome Alternative **Copper Alternative** Bronze Alternative **OBA** 0il-Rubbed PRA Pewter RBA **Rustic Brass** SNA Satin Nickel **Bronze Alternative** Alternative Alternative Alternative

Metal Finish (Premium)



Brushed Aluminum



This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.