

# PARALLEL™

CP5572/CP5573/CP5574/CP5575/CP5576/CP5578  
8" Wide Pendant – Cable Suspended



[VisaLighting.com/products/Parallel](http://VisaLighting.com/products/Parallel)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_



**DIMENSIONS<sup>1,7</sup>**

Overall height must be specified


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(192) indicates an overall fixture height of 192"

W = Width      OAH = Standard Overall Height      X = Body Height      WT = Weight

	CP5572	CP5573	CP5574	CP5575	CP5576	CP5578
<b>W</b>	8-5/8" (219 mm)					
<b>OAH</b>	192" (4877 mm)					
<b>X with White LED source</b>	25" (635 mm)	36" (914 mm)	47" (1194 mm)	58" (1473 mm)	69" (1753 mm)	91" (2311 mm)
<b>X with RGB source</b>	21" (533 mm)	30" (762 mm)	45" (1143 mm)	63" (1600 mm)	69" (1753 mm)	93-1/8" (2365 mm)
<b>WT</b>	15 lbs	22 lbs	30 lbs	41 lbs	48 lbs	60 lbs

**RELATIVE SCALE DRAWING**

CP5578 – STRUCTURAL BLOCKING REQUIRED

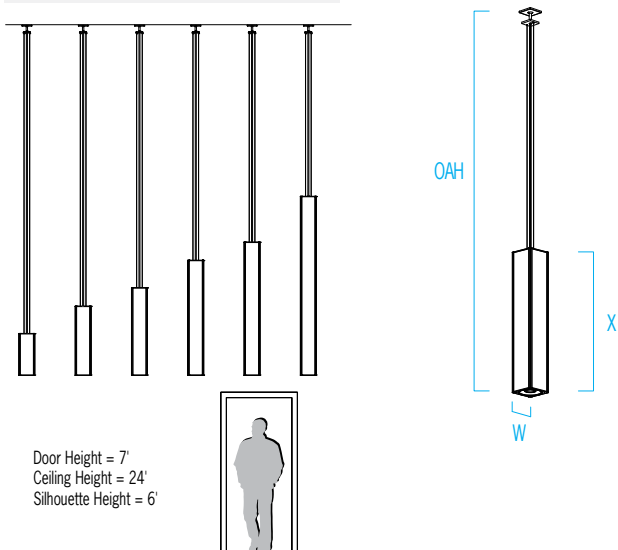

**FEATURES**

- Integral driver
- Color changing RGB is DMX-512 compatible (controls by others)
- See DMX detail on page 3
- Optional downlight, 0-10V dimmable (controls by others), with Narrow, Medium or Wide optical distribution options
- Power cord is white; cables are stainless steel
- Canopy/Cable/Cord can be shipped ahead to speed installation
- Matte white acrylic panels; optional Lumicor® acrylic panels
- No VOC powder coat paint finish
- ETL listed for damp locations (not suited for exterior applications)



# PARALLEL (cont.)

## CP5572/CP5573/CP5574/CP5575/CP5576/CP5578

### 8" Wide Pendant – Cable Suspended



CP5578 – STRUCTURAL BLOCKING REQUIRED

Fill in shaded boxes using information listed below

- MVOLT								
<b>MODEL<sup>1</sup></b> CP5572 CP5573 CP5574 CP5575 CP5576 CP5578  See page 1	<b>BODYLIGHT<sup>2</sup></b> • L30K L35K • L40K • RGB	<b>DOWNLIGHT<sup>3</sup> (Optional)</b> • L30K L35K • L40K  Bottom has square aperture with glow when no downlight specified	<b>VOLTAGE</b> MVOLT	<b>DOWNLIGHT<sup>4</sup> OPTICS</b> MED NRW WIDE  Required with Downlight Option	<b>FINISH</b>  See last page for finish order codes	<b>DIFFUSER<sup>5</sup></b> • KA • OLIN • SL	<b>OPTION<sup>6</sup></b> XPS  XPS not available on CP5575, CP5576, CP5578	<b>OAH<sup>7</sup></b>  See page 1

#### BODYLIGHT SOURCE<sup>2</sup> (Select One)

Dimmable 0-10V to 1%, Minimum 83CRI, within 3-step MacAdam

Source	CCT	CP5572		CP5573		CP5574		CP5575		CP5576		CP5578	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
• L30K	3000K	5700	49	10100	86	13000	111	17400	148	20300	173	27600	234
L35K	3500K			10400				17900				28500	
• L40K	4000K	5900				13400		17900		20900		28500	
• RGB			24		40		56		79		87		119

Bodylight and downlight are separately switched and controlled/dimmed

#### DOWNLIGHT SOURCE<sup>3</sup>

Bottom has square aperture with glow when no downlight specified

Source	CCT	CP5572/CP5573		CP5574/75/76/78	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
• L30K	3000K	1800	18	2700	28
L35K	3500K	1800		2800	
• L40K	4000K	1900		2800	

#### DOWNLIGHT OPTICS<sup>4</sup>

For downlight only

MED	48° Beam
NRW	34° Beam
WIDE	84° Beam

#### BOTTOM WITH DOWNLIGHT



#### BOTTOM – NO DOWNLIGHT



#### VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

#### BODYLIGHT LUMEN MAINTENANCE RATING

L80 (reported)	>60,000 hrs
----------------	-------------


#### DOWNLIGHT LUMEN MAINTENANCE RATING

L80 (reported)	>55,000 hrs
----------------	-------------


#### DIFFUSER OPTIONS<sup>5</sup>

Diffuser is matte white acrylic if no option is selected


• KA	Kauri Lumicor
• OLIN	Oyster Linen Lumicor
• SL	Silver Spun Lumicor




#### PHOTOMETRICS




Body Light



NRW 34° Beam



WIDE 84° Beam



MED 48° Beam

Options continued on Page 3

# PARALLEL (cont.)

CP5572/CP5573/CP5574/CP5575/CP5576/CP5578

## 8” Wide Pendant – Cable Suspended


OPTION 6

**XPS** Express 10 day shipping. Items marked with a bullet (•) are not available with XPS  
 XPS not available on CP5575, CP5576, CP5578


CANOPY & CABLE SUPPORT



DMX DETAIL

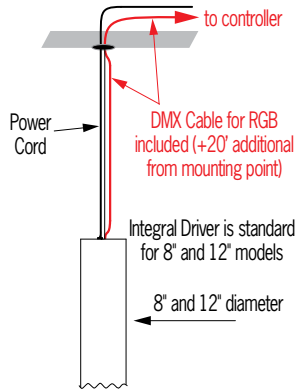

STRUCTURAL BLOCKING DETAIL

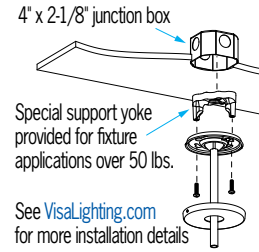

**CP5578 – STRUCTURAL BLOCKING REQUIRED**

PARALLEL PRODUCT FAMILY

<b>Indoor Sconce</b>		• CB5530
<b>Indoor Pendants</b>	4” Wide	• CP5562, CP5563, CP5564, CP5565, CP5566, CP5568
	8” Wide	• CP5572, CP5573, CP5574, CP5575, CP5576, CP5578
	12” Wide	• CP5582, CP5583, CP5584, CP5585, CP5586, CP5588

SUGGESTED VARIATIONS

- Custom colors
- Stem mount
- Custom graphics

See [Visalighting.com/Products/Parallel](https://www.visalighting.com/Products/Parallel) for more information

# PARALLEL (cont.)

CP5572/CP5573/CP5574/CP5575/CP5576/CP5578

## 8" Wide Pendant – Cable Suspended



### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
						
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
						
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red