

SEQUENCE™ SQUARE


CP5836/CP5838/CP5840/CP5842/CP5844/CP5846

Indoor pendants — 8” Width



VisaLighting.com/products/Sequence-Square

Type: _____ Project: _____ Location: _____

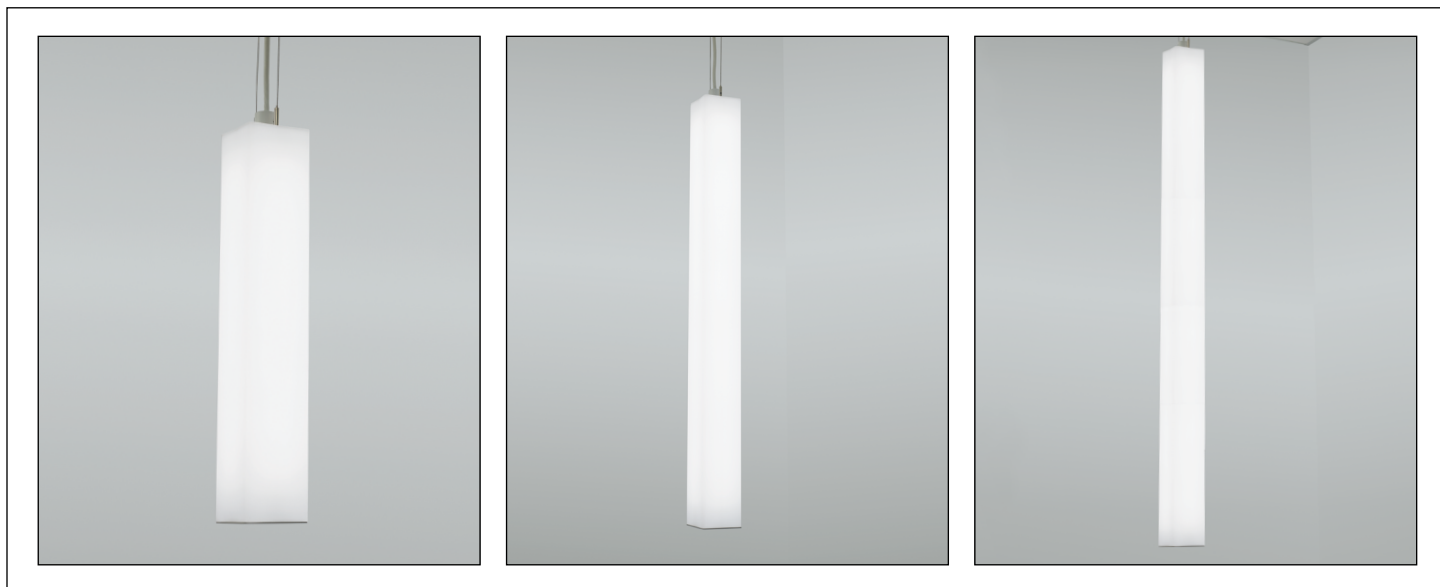

DIMENSIONS^{1,6}



OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(192) indicates an overall fixture height of 192”

W = Width OAH = Overall Height X = Body Height WT = Weight

	CP5836	CP5838	CP5840	CP5842	CP5844	CP5846
W	8-1/4” (210 mm)					
Standard OAH	192” (4877 mm)					
X with white LED source	24-7/8” (632 mm)	35-7/8” (911 mm)	47-7/8” (1191 mm)	57-7/8” (1470 mm)	68-7/8” (1749 mm)	90-7/8” (2308 mm)
X with RGB source	20-7/8” (530 mm)	32-7/8” (835 mm)	44-7/8” (1140 mm)	62-7/8” (1597 mm)	68-7/8” (1749 mm)	93” (2362 mm)
WT	12 lbs	18 lbs	25 lbs	35 lbs	40 lbs	48 lbs

STRUCTURAL BLOCKING REQUIRED FOR MODELS CP5840, CP5842, CP5844, AND CP5846

RELATIVE SCALE DRAWING

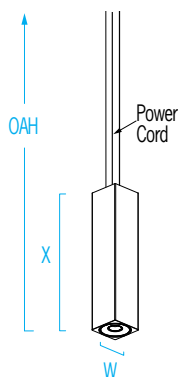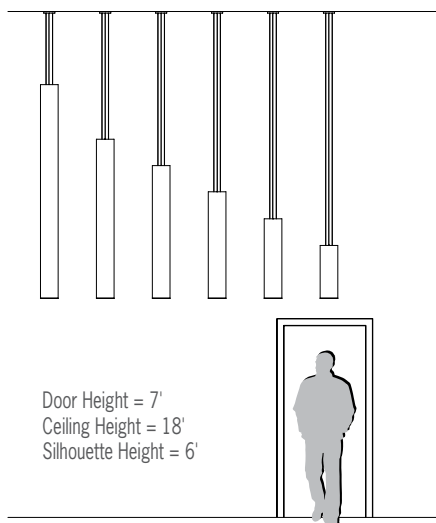

FEATURES

- Integral driver
- Color changing RGB LED is DMX-512 compatible (controls by others), See DMX detail
- Optional LED downlight, 0-10V dimmable (controls by others), with narrow, medium or wide optical distribution options
- Power cord is white; suspension cables are stainless steel
- Canopy/Cord/Cables can be shipped ahead to speed installation
- Mounts to standard electrical junction box (by others) with provided hardware
- Matte white acrylic body
- No VOC powder coat paint
- ETL listed for damp locations. Not suited for exterior applications



SEQUENCE SQUARE (cont.)

CP5836/CP5838/CP5840/CP5842/CP5844/CP5846

Indoor pendants — 8” Width



Fill in shaded boxes using information listed below

— MVOLT

MODEL ¹ CP5836 CP5838 CP5840 CP5842 CP5844 CP5846 See page 1	BODYLIGHT ² L30K L35K L40K RGB	DOWNLIGHT ³ (Optional) L30K L35K L40K	VOLTAGE MVOLT	DOWNLIGHT OPTICS ⁴ (Optional) MED NRW WIDE Bottom has square aperture with glow when no downlight specified	CANOPY FINISH See last page for finish order codes Downlight compartment painted to match	OPTION(S) ⁵ RMD	OAH ⁶ See page 1
---	--	---	-------------------------	--	--	--------------------------------------	---

BODYLIGHT SOURCE² (Select one)

White LEDs dimmable 0-10V to 1%, Minimum 83CRI, within 3-step MacAdam

Source	CCT	CP5836		CP5838		CP5840		CP5842		CP5844		CP5846	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K	3000K	5400	48	9500	86	12200	109	16200	161	19000	189	25800	256
L35K	3500K	5400		9500		12200		16200		19000		25800	
L40K	4000K	5500		9800		12600		16700		19600		26600	
RGB			24		40		56		79		87		118

Bodylight and downlight are separately switched and controlled/dimmed

DOWNLIGHT SOURCE³

Bottom has square aperture for airflow and glow when no downlight specified

Source	CCT	CP5836/CP5838		CP5840/CP5842/CP5844/CP5846	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K	3000K	1800	18	2700	28
L35K	3500K	1800		2800	
L40K	4000K	1900		2800	


DOWNLIGHT OPTICS⁴

For downlight only

MED	48° Beam
NRW	34° Beam
WIDE	84° Beam

DOWNLIGHT DETAIL

Rim and Bezel are Painted White



VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

BODYLIGHT LUMEN MAINTENANCE RATING

L80 (reported)	>60,000 hrs
----------------	-------------

DOWNLIGHT LUMEN MAINTENANCE RATING


L80 (reported)	>55,000 hrs
----------------	-------------

OPTION⁵


Driver is integral unless RMD option is selected

RMD	Remote driver box has knock-outs for conduit connection, may be recess mounted with insulation contact (type IC).
------------	---


DMX DETAIL

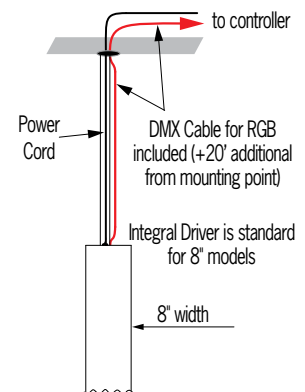


PHOTOMETRICS




Body Light



NRW 34° Beam



MED 48° Beam



WIDE 84° Beam

SEQUENCE SQUARE (cont.)

CP5836/CP5838/CP5840/CP5842/CP5844/CP5846
Indoor pendants — 8" Width



REMOTE DISTANCE INFORMATION

Model	Maximum Recommended Remote Wiring Distance from RMD to fixture canopy			
	12awg	14awg	16awg	18awg
CP5836	1400	900	550	350
CP5838	750	450	300	175
CP5840	550	350	225	125
CP5842	400	250	150	100
CP5844	350	200	125	75
CP5846	275	175	100	50


Distance measured in feet

SEQUENCE SQUARE PRODUCT FAMILY

Indoor Pendants	4" Diameter	CP5820, CP5822, CP5824, CP5826, CP5828, CP5830
	8" Diameter	CP5836, CP5838, CP5840, CP5842, CP5844, CP5846

See [Visalighting.com/Products/Sequence-Square](https://www.visalighting.com/Products/Sequence-Square) for more information

STRUCTURAL BLOCKING DETAIL



STRUCTURAL BLOCKING REQUIRED FOR MODELS CP5840, CP5842, CP5844, AND CP5846

SUGGESTED VARIATIONS

- Custom colors

SEQUENCE SQUARE (cont.)

CP5836/CP5838/CP5840/CP5842/CP5844/CP5846

Indoor pendants — 8” Width



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red