

CP7122 ZUME™ DL

Indoor – Luminous Globe with Downlight



VisaLighting.com/products/Zume-DL

Type: _____ Project: _____ Location: _____




DIMENSIONS^{1,8}

OAH MUST BE SPECIFIED


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.

DIA = Diameter OAH = Standard Overall Height WT=Weight

| CP7122- | 12 | 16 | 22 |
|---------|----------------|----------------|----------------|
| DIA | 12" (305 mm) | 16" (406 mm) | 22" (559 mm) |
| MIN OAH | 20" (508 mm) | 24" (610 mm) | 30" (762 mm) |
| STD OAH | 72" (1829 mm) | 72" (1829 mm) | 72" (1829 mm) |
| MAX OAH | 192" (4877 mm) | 192" (4877 mm) | 192" (4877 mm) |
| WT | 12 lbs | 13 lbs | 16 lbs |

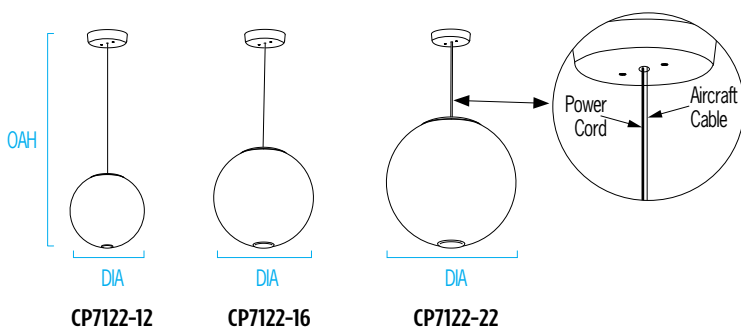


RELATIVE SCALE DRAWING

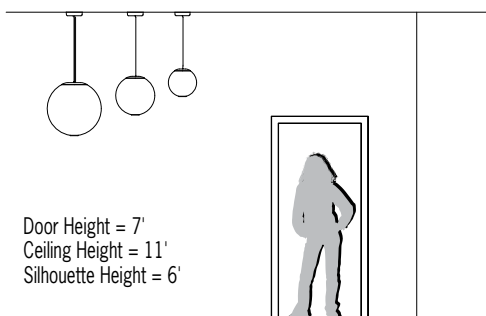

FEATURES

- Consistent luminance across all sizes
- Downlight, 0-10V dimmable (controls by others), with optional narrow, medium, or wide optical distribution
- Remote Driver (RMD) or Driver in Canopy (SDC) configurations available
- Remote Driver (RMD) includes round canopy 5-1/4" diameter and 1/2" deep
- Driver in canopy (SDC) includes round canopy 6-3/8" diameter and 1-1/2" deep
- Canopy mounts over 4x4 junction box (by others) with provided hardware and is painted white
- One piece gloss white acrylic globe for seamless appearance
- Suspended by 2-conductor white power cord (12" and 16"); 22" suspended by aircraft cable
- Non-VOC powder coat finishes or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior application

SPHERE PHOTOMETRICS

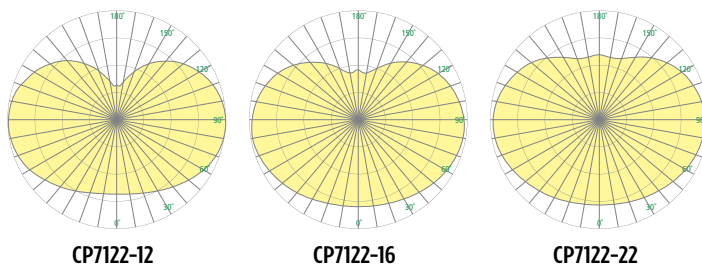

CP7122-12

CP7122-16

CP7122-22

CP7122 ZUME DL (cont.)

Indoor – Luminous Globe with Downlight



Fill in shaded boxes using information listed below

| CP7122 | | | | | | - MVOLT | | | | |
|------------|--------------------------------------------|----------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------|--------------------------------------------------------------|-----------------------------------|----------------------------|------------------------------------|
| MODEL | DIAMETER ¹ 12" 16" 22" | BODYLIGHT ² SOURCE L30K L35K L40K | DOWNLIGHT ³ OUTPUT LOW HIGH | DOWNLIGHT ⁴ OPTIC MED NRW WIDE | SOURCE ⁵ OPTION 90CRI | VOLTAGE MVOLT | CAP FINISH See last page for finish order codes | DRIVER ⁶ RMD SDC | OPTION ⁷ DCC | OAH ⁸ See page 1 |
| See page 1 | | | | | Minimum 80CRI is standard if option is not selected 90CRI not available with L35K | | | | | |

BODYLIGHT SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

| Bodylight Source | Delivered Lumens | | |
|------------------|------------------|-----------|-----------|
| | CP7122-12 | CP7122-16 | CP7122-22 |
| L30K | 2300 | 3600 | 6300 |
| L35K | 2400 | 3700 | 6500 |
| L40K | 2400 | 3800 | 6600 |
| Power (Watts) | 18 | 28 | 49 |

VOLTAGE

| | |
|-------|--------------------|
| MVOLT | 120-277V, 50/60 Hz |
|-------|--------------------|

LUMEN MAINTENANCE RATING

| | |
|---------------------------|-------------|
| Body Light L80 (reported) | >50,000 hrs |
| Downlight L70 (reported) | >55,000 hrs |

DOWNLIGHT OUTPUT³ AND OPTIC⁴ (Select one Output and one Optic)

CCT matches bodylight selection
Minimum 80CRI, within 3-step MacAdam


| | Delivered Lumens | | Power (Watts) |
|------|------------------|------|---------------|
| | L30K/L35K | L40K | |
| LOW | 800 | 850 | 8 |
| HIGH | 1500 | 1600 | 17 |

| Downlight Optic | |
|-----------------|----------|
| NRW | 27° Beam |
| MED | 35° Beam |
| WIDE | 43° Beam |


SOURCE OPTION⁵

Minimum 80CRI within 3-step MacAdam is standard if option is not selected.
90CRI not available with L35K


| | |
|-------|---------------------------------------------------------------------------------------------------------------------------------|
| 90CRI | Color rendering index minimum 90, minimum R9 value of 50 (bodylight delivered lumens reduced by 5% and downlight output by 15%) |
|-------|---------------------------------------------------------------------------------------------------------------------------------|



CP7122-N RW



CP7122-MED



CP7122-WIDE

Options continued on Page 3

CP7122 ZUME DL (cont.)


Indoor – Luminous Globe with Downlight



DRIVER ⁶ (Select one)


⚠ Availability may be interdependent with Voltage, Source or Other Options

| | |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| SDC | Surface canopy with integral driver; canopy is painted white |
| RMD | Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC). Canopy is painted white. |

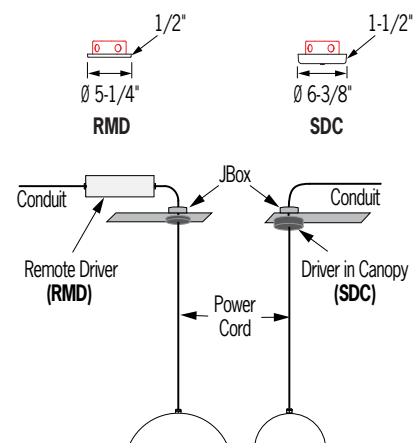

REMOTE DRIVER (RMD) INFORMATION

8" Box Dimensions

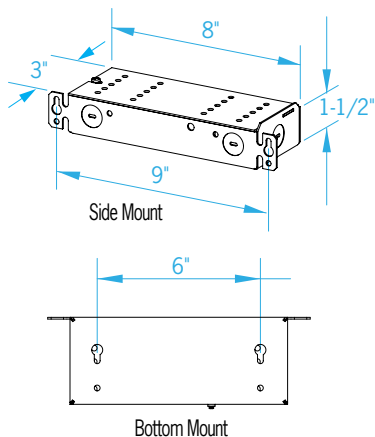

| Model | Maximum Recommended Remote Wiring Distance from RMD to fixture canopy | | | |
|-----------|-----------------------------------------------------------------------|-------|-------|-------|
| | 12AWG | 14AWG | 16AWG | 18AWG |
| CP7122-12 | 475 | 275 | 175 | 100 |
| CP7122-16 | 475 | 275 | 175 | 100 |
| CP7122-22 | 200 | 100 | 50 | 25 |

All distances in feet

Remote driver boxes have knockouts for conduit connections

OPTION ⁷

⚠ Option availability may be interdependent with Other Options

| | |
|------------|-----------------------------------------------------------------------------------------------|
| DCC | Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations) |
|------------|-----------------------------------------------------------------------------------------------|

CP7122 ZUME DL (cont.)

Indoor – Luminous Globe with Downlight



ZUME PRODUCT FAMILY

| Indoor | | | | SUGGESTED VARIATION |
|----------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Zume In | Cord Suspension | <ul style="list-style-type: none">• CP7120-8• CP7120-12• CP7120-16 | | |
| | Cord & Cable Suspension | <ul style="list-style-type: none">• CP7120-22 | | |
| Zume DL | Cord Suspension | <ul style="list-style-type: none">• CP7122-12• CP7122-16 | | |
| | Cord & Cable Suspension | <ul style="list-style-type: none">• CP7122-22 | | |
| Outdoor | | | | |
| Zume Out | Cord & Cable Suspension | <ul style="list-style-type: none">• OP2120-ShortCap — 12”• OP2130-ShortCap — 16”• OP2140-ShortCap — 20” | <ul style="list-style-type: none">• OP2120-SolidCap — 12”• OP2130-SolidCap — 16”• OP2140-SolidCap — 20” | <ul style="list-style-type: none">• OP2120-SlottedCap — 12”• OP2130-SlottedCap — 16”• OP2140-SlottedCap — 20” |
| | Catenary Suspension | <ul style="list-style-type: none">• OP2122-ShortCap — 12”• OP2132-ShortCap — 16”• OP2142-ShortCap — 20” | <ul style="list-style-type: none">• OP2122-SolidCap — 12”• OP2132-SolidCap — 16”• OP2142-SolidCap — 20” | <ul style="list-style-type: none">• OP2122-SlottedCap — 12”• OP2132-SlottedCap — 16”• OP2142-SlottedCap — 20” |
| | Stem Suspension | <ul style="list-style-type: none">• OP2124-ShortCap — 12”• OP2134-ShortCap — 16”• OP2144-ShortCap — 20” | <ul style="list-style-type: none">• OP2124-SolidCap — 12”• OP2134-SolidCap — 16”• OP2144-SolidCap — 20” | <ul style="list-style-type: none">• OP2124-SlottedCap — 12”• OP2134-SlottedCap — 16”• OP2144-SlottedCap — 20” |

SUGGESTED VARIATION

- Recommend custom cover plate over downlight opening for CCT consistency in spaces requiring combinations of globes with and without downlight
- 90CRI available in 3500K by special order only

See [Visalighting.com/products/Zume-DL](https://visalighting.com/products/Zume-DL) for more information

CP7122 ZUME DL (cont.)

Indoor – Luminous Globe with Downlight



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

| | | | | | | |
|-----------------------------|---------------------------|-----------------------------|-------------------------------|---------------------------|--------------------------|----------------------------|
| | | | | | | |
| AGGY Agate Grey | ALGN Alpine Green | BJBG Baja Beige | BMAT Bronze Matte | BRNZ Bronze | BSIL Blade Silver | CVBL Cove Blue |
| | | | | | | |
| DEOR Deoro Gold | GLWT Glacier White | GSIL Graphite Silver | HRGR Harbor Grey | JTBK Jet Black | OCBL Ocean Blue | SHGR Shoreline Grey |
| | | | | | | |
| SBGN Sagebrush Green | SLGR Slate Grey | SSTP Sierra Taupe | TRCN Terracotta Canyon | TRWT Traffic White | VBLK Velvet Black | VNRD Vineyard Red |

Alternative Metal Finishes (Premium)

| | | | |
|------------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | | | |
| BBA Brushed Brass Alternative | BCA Brushed Chrome Alternative | BUA Brushed Copper Alternative | BZA Brushed Bronze Alternative |
| | | | |
| OBA Oil-Rubbed Bronze Alternative | PRA Pewter Alternative | RBA Rustic Brass Alternative | SNA Satin Nickel Alternative |

Metal Finish (Premium)

| |
|----------------------------|
| |
| BA Brushed Aluminum |