

SLEIGHT™

CV1970 and CV1972

Semi-Recessed - Integral Driver



Visalighting.com/products/Sleight

Type: _____ Project: _____ Location: _____




DIMENSIONS¹

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth
 RW = Recessed Width RH = Recessed Height RD = Recessed Depth


	CV1970	CV1972
W	16" (406mm)	32" (813 mm)
H	1-3/8" (35 mm)	1-3/8" (35 mm)
D	1-3/8" (35 mm)	1-3/8" (35 mm)
RW	16-1/2" (419 mm)	32-1/2" (826 mm)
RH	1-7/8" (48 mm)	1-7/8" (48 mm)
RD	3-3/8" (86 mm)	3-3/8" (86 mm)

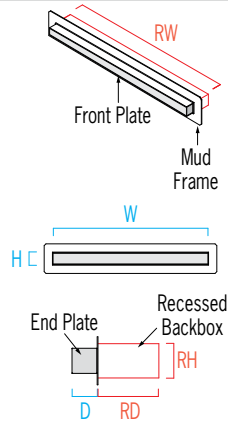


FEATURES

- Integral driver
- Ceiling or Wall mount (horizontal or vertical orientation)
- Semi-recessed (mud-in required; mud frame included)
- Not for installation in ceiling grid system
- Optional recessed backbox is available for pre-shipment for rough-in installation
- Frosted acrylic diffuser
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING

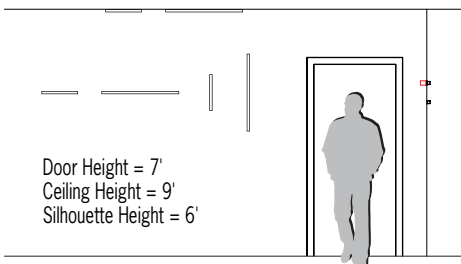

PHOTOMETRICS

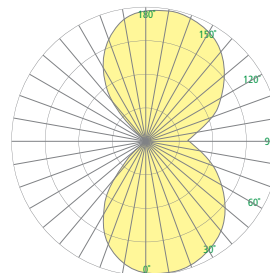

ADA Compliant



ETL Listed



5 Year Warranty

SLEIGHT (cont.)

CV1970 and CV1972

Semi-Recessed - Integral Driver



Fill in shaded boxes using information listed below

		- MVOLT			
MODEL¹ CV1970 CV1972 See page 1	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	VOLTAGE MVOLT	FINISH See last page for finish order codes	TILE TRIM FLANGE FINISH Required with TTF option See last page for finish order codes	OPTION(S)³ DCC RB TTF

SOURCE² (Select one)


Dimmable 0-10V to 10%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	CV1970		CV1972	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
L30K(H)	3000K	550	15	1100	29
L30K(L)	3000K	250	7	450	13
L35K(H)	3500K	550	15	1100	29
L35K(L)	3500K	250	7	450	13
L40K(H)	4000K	550	15	1100	29
L40K(L)	4000K	250	7	450	13

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

TILE TRIM FLANGE DETAIL (TTF)




OPTIONS³

⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
RB	Pre-ship recessed components
TTF	Tile trim flange; recessed installation in tile; painted - see finishes

MOUNTING DETAIL

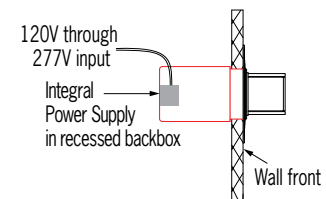

SLEIGHT (cont.)

CV1970 and CV1972

Semi-Recessed - Integral Driver

SLEIGHT PRODUCT FAMILY

Semi Recessed, Integral Driver	16"	• CV1970
	32"	• CV1972
Surface Mount, Low Voltage	16"	• CV1976PSX
	32"	• CV1980PSX
Pendants	47"	• CP5640
		• CP5640PSX

SUGGESTED VARIATIONS

- Custom color
- Ceiling to wall connection to continue up wall into ceiling
- Increase length (4" to 10" increments)

See [Visalighting.com/products/Sleight](https://visalighting.com/products/Sleight) for more information

SLEIGHT (cont.)

CV1970 and CV1972

Semi-Recessed - Integral Driver



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum