

# SLEIGHT™


## CV1976PSX and CV1980PSX

### Surface Mount - Low Voltage



[Visalighting.com/products/Sleight](http://Visalighting.com/products/Sleight)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

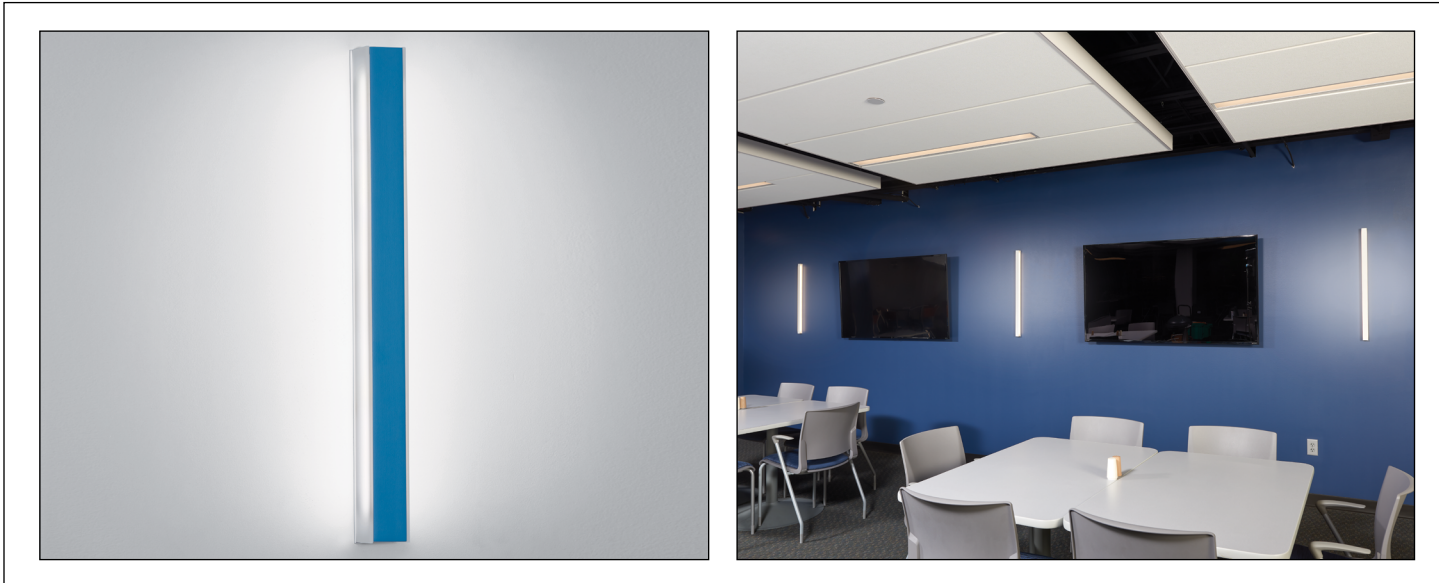


#### DIMENSIONS<sup>1</sup>

Depth is measured from wall to front of fixture


W = Width H = Height D = Depth

	CV1976PSX	CV1980PSX
W	16" (406mm)	32" (813 mm)
H	1-3/8" (35 mm)	1-3/8" (35 mm)
D	1-3/8" (35 mm)	1-3/8" (35 mm)

#### Surface Mount




#### Surface Mount with JBC Option




#### FEATURES

- Use with PS24 Series of 24VDC Class II remote drivers. Each PS24 can power multiple fixtures and is available with 0-10V dimming. System costs are reduced by distributing the PS24 over multiple fixtures. Low-voltage Class II wiring between the PS24 and connected fixtures simplifies installation. The PS24 is not included with fixtures; order separately- see Accessories on page 2.
- Optional 0V-10V LED dimming with remote driver
- Ceiling or Wall mount (horizontal or vertical orientation)
- Not for installation in ceiling grid system
- Frosted acrylic diffuser
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

#### RELATIVE SCALE DRAWING

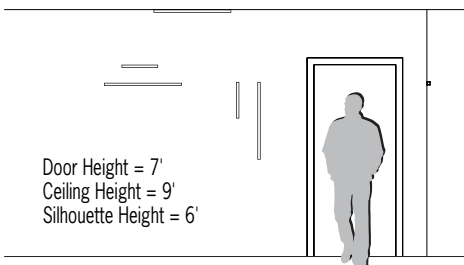

#### PHOTOMETRICS



ADA Compliant



ETL Listed



5 Year Warranty

# SLEIGHT (cont.)

## CV1976PSX and CV1980PSX

### Surface Mount - Low Voltage



Power supply is not included - Order Separately (See Accessories Section below)

Fill in shaded boxes using information listed below

<b>MODEL<sup>1</sup></b> CV1976PSX CV1980PSX  See page 1		<b>SOURCE<sup>2</sup></b> L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)		<b>VOLTAGE</b> 24VDC	<b>FINISH</b>  See last page for finish order codes	<b>OPTION(S)<sup>3</sup></b> DCC JBC MRI
--	--	---	--	-------------------------	---	---

**SOURCE<sup>2</sup>** (Select one)


Dimmable 0-10V to 10%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	CV1976PSX		CV1980SX	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
L30K(H)	3000K	550	12	1100	23
L30K(L)	3000K	250	5	450	10
L35K(H)	3500K	550	12	1100	23
L35K(L)	3500K	250	5	500	10
L40K(H)	4000K	550	12	1100	23
L40K(L)	4000K	250	5	500	10

**VOLTAGE**

<b>24VDC</b>	24VDC
--------------	-------

**MOUNTING DETAIL**



**OPTIONS<sup>3</sup>** (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options

<b>DCC</b>	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
<b>JBC</b>	Junction box cover (5" square) for use with existing 4" junction box. Painted to match finish
<b>MRI</b>	MRI room application, use PS-24VDC90W01 DRIVER

**ACCESSORIES** (Order Separately)

<b>PS-24VDC90W01</b>	24VDC 90 watt power supply; no dimming, specify 120V or 277V input. 75' maximum remote distance using 16 AWG wire. Express 10 day shipping option (XPS) available.
<b>PS-24VDC90W02</b>	24VDC 90 watt power supply; 0-10V dimmable, specify 120V or 277V input. 20' maximum remote distance. Express 10 day shipping option (XPS) available.

# SLEIGHT (cont.)

## CV1976PSX and CV1980PSX

### Surface Mount - Low Voltage

#### SLEIGHT PRODUCT FAMILY

<b>Semi Recessed, Integral Driver</b>	16"	• <a href="#">CV1970</a>
	32"	• <a href="#">CV1972</a>
<b>Surface Mount, Low Voltage</b>	16"	• <a href="#">CV1976PSX</a>
	32"	• <a href="#">CV1980PSX</a>
<b>Pendants</b>	47"	• <a href="#">CP5640</a>
		• <a href="#">CP5640PSX</a>

See [Visalighting.com/products/Sleight](https://visalighting.com/products/Sleight) for more information

#### SUGGESTED VARIATIONS

- Custom color
- Ceiling to wall connection to continue up wall into ceiling
- Increase length (4" to 10" increments)

# SLEIGHT (cont.)

## CV1976PSX and CV1980PSX

### Surface Mount - Low Voltage



#### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red

#### Alternative Metal Finishes (Premium)

<b>BBA</b> Brushed Brass Alternative	<b>BCA</b> Brushed Chrome Alternative	<b>BUA</b> Brushed Copper Alternative	<b>BZA</b> Brushed Bronze Alternative
<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>PRA</b> Pewter Alternative	<b>RBA</b> Rustic Brass Alternative	<b>SNA</b> Satin Nickel Alternative

#### Metal Finish (Premium)

<b>BA</b> Brushed Aluminum