

AVATAR™ INDOOR – SINGLE ACCENT BAR (cont.)

CV2009/CV2011/CV2013/CV2015



VisaLighting.com/products/Avatar

Type: _____ Project: _____ Location: _____




DIMENSIONS¹


Depth is measured from wall to front of fixture

L = Length D = Depth W = Width

	CV2009	CV2011	CV2013	CV2015
L	19-3/4" (502 mm)	25-1/8" (638 mm)	36-1/8" (918 mm)	47-1/4" (1200 mm)
D	4" (102 mm)			
W	7-1/4" (184 mm)			

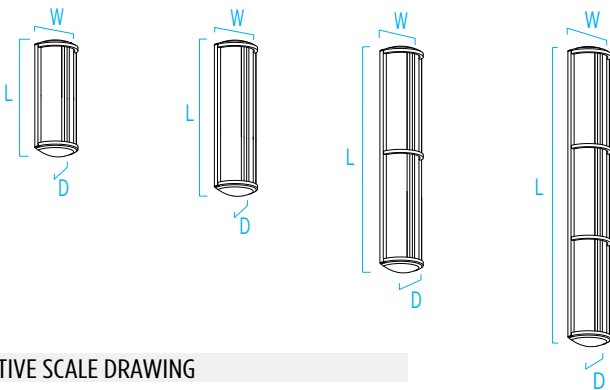


RELATIVE SCALE DRAWING

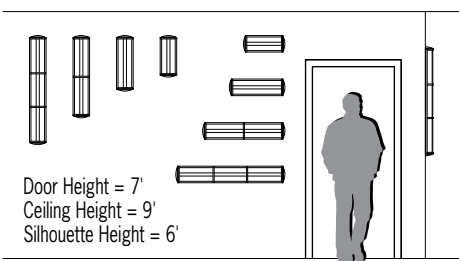

FEATURES

- Modular design for replacement of LED source and integral driver
- Vertical mounting; ceiling or wall mount (vertical or horizontal orientation)
- Mounts over standard electrical junction box (by others) with provided hardware
- Removable cam-action hinged frame for ease of maintenance
- Auxiliary mounting holes and hardware provided
- Extruded aluminum backplate and center accent; die-cast end caps. Solid metal accent
- High impact white acrylic diffuser
 - UV stable
 - UL-94 HB Flame Class rated
- No VOC powder coat paint
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS

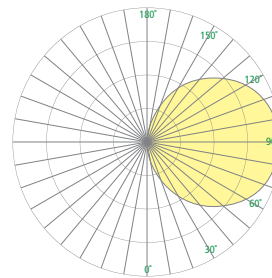

AVATAR INDOOR – SINGLE ACCENT BAR (cont.)

CV2009/CV2011/CV2013/CV2015



Fill in shaded boxes using information listed below

MVOLT				
MODEL¹ CV2009 CV2011 CV2013 CV2015 See page 1	SOURCE² • L30K(H) • L30K(L) L35K(H) L35K(L) • L40K(H) • L40K(L)	VOLTAGE MVOLT	FINISH See last page for finish order codes	OPTION(S)³ DCC PMO (Painted) PMO (BA) XPS

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	CV2009		CV2011		CV2013		CV2015	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
• L30K(H)	3000K	1200	15	1600	19	2400	29	3300	38
• L30K(L)	3000K	800	9	1100	13	1600	19	2200	25
L35K(H)	3500K	1200	15	1600	19	2400	29	3300	38
L35K(L)	3500K	800	9	1100	13	1600	19	2200	25
• L40K(H)	4000K	1200	15	1700	19	2500	29	3400	38
• L40K(L)	4000K	800	9	1100	13	1700	19	2200	25

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

OPTIONS³ (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
PMO (Painted)	Perforated metal overlay painted. Color Code Required - see finish order codes on last page
PMO (BA)	Perforated metal overlay in Brushed Aluminum
XPS	Express 10 day shipping. Items marked with a bullet (●) are not available with XPS

AVATAR INDOOR – SINGLE ACCENT BAR (cont.)

CV2009/CV2011/CV2013/CV2015



AVATAR PRODUCT FAMILY

Outdoor	Single Bar	• OW1301, OW1303, OW1305, OW1307
	Dual Bars	• OW1311, OW1313, OW1315, OW1317
	Perforated	• OW1331, OW1333, OW1335, OW1337
Indoor	Single Bar	• CV2009, CV2011, CV2013, CV2015
	Dual Bars	• CV2025, CV2027, CV2029, CV2031

SUGGESTED VARIATIONS

- Increase length
- Add/remove bar stock

See [Visalighting.com/Products/Avatar](https://visalighting.com/Products/Avatar) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red

Metal Finish (Premium) – Premium metals for PMO(BA) option only



BA Brushed Aluminum