

MERIDIAN ROUND™


U.S. Patent Pending



CV5700PSX (ADA), CV5702PSX and 5704PSX Sconces - Low Voltage

Visalighting.com/products/Meridian-Round

Type: _____ Project: _____ Location: _____

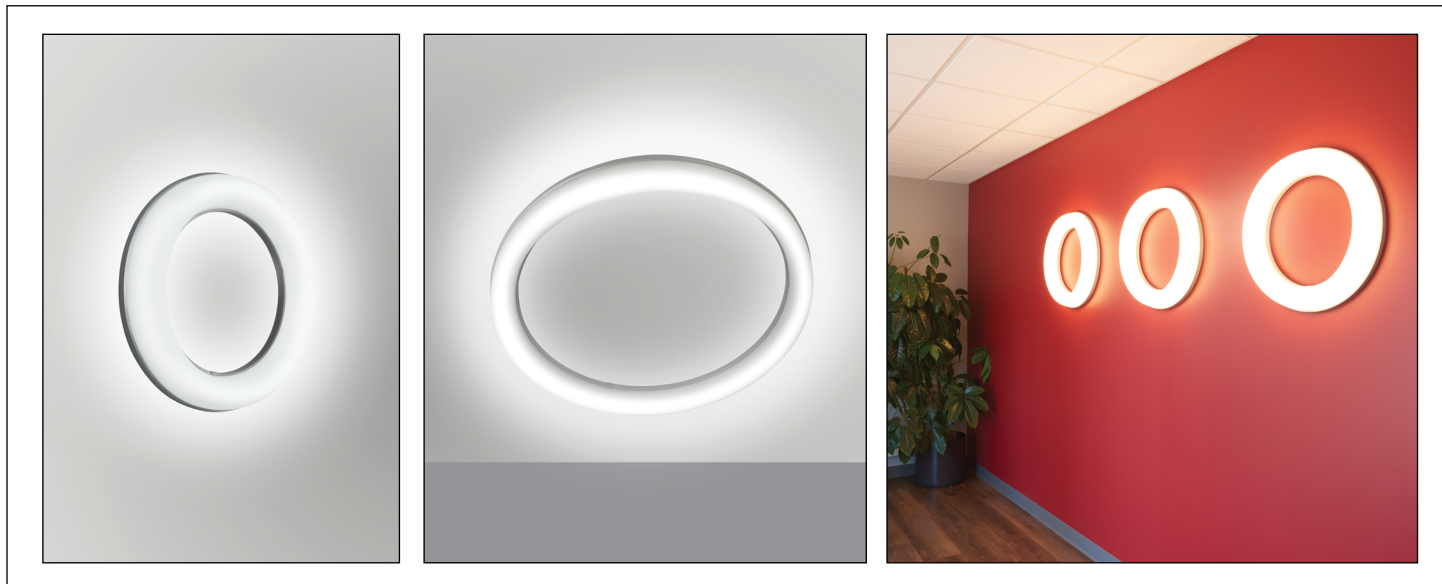


DIMENSIONS¹

Depth is measured from wall to front of fixture

DIA = Diameter D = Depth


	CV5700PSX (ADA)	CV5702PSX	CV5704PSX
DIA	24" (610 mm)	36" (914 mm)	48" (1219 mm)
D	3-3/4" (95 mm)	5" (127 mm)	5" (127 mm)

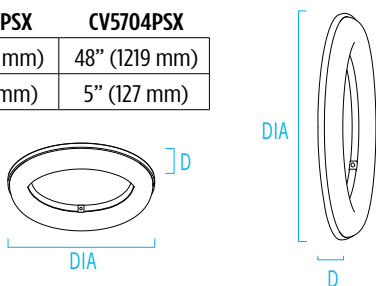


FEATURES

- Remote driver
- High or low lumen output options
- Evenly illuminated diffuser
- Use with PS24 Series of 24VDC Class II remote power supplies. Each PS24 is available with 0-10V dimming. Low-voltage Class II wiring between the PS24 and connected fixtures simplifies installation. The PS24 is not included with fixtures; order separately- see Accessories on page 2
- Versatile mounting; ceiling or wall
- Surface mount
- Rolled extruded aluminum ring with vacuum formed frosted acrylic diffuser
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

RELATIVE SCALE DRAWING

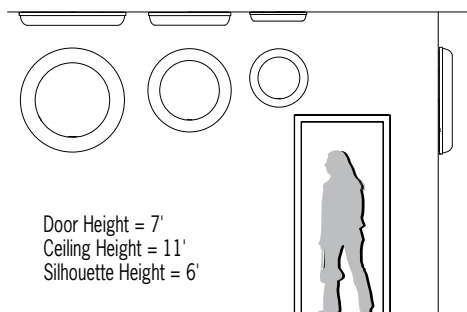

PHOTOMETRICS



ADA Compliant
(CV5700PSX)

ETL Listed

5 Year Warranty

MERIDIAN ROUND (cont.)



CV5700PSX (ADA), CV5702PSX and 5704PSX Sconces - Low Voltage

Fill in shaded boxes using information listed below

24VDC				
MODEL¹ CV5700PSX CV5702PSX CV5704PSX <i>See page 1</i>	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	VOLTAGE 24VDC	FINISH <i>See last page for finish order codes</i>	OPTION³ DCC

Power Supply is not included - Order separately (See Accessory section below)

SOURCE² (Select one)


Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	CV5700PSX		CV5702PSX		CV5704PSX	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
L30K(H)	3000K	2800	30	4600	47	6600	67
L30K(L)	3000K	2100	23	3500	36	4900	51
L35K(H)	3500K	2800	30	4600	47	6600	67
L35K(L)	3500K	2100	23	3500	36	4900	51
L40K(H)	4000K	2800	30	4600	47	6600	67
L40K(L)	4000K	2100	23	3500	36	4900	51

VOLTAGE

24VDC	24VDC
--------------	-------

MOUNTING DETAIL



OPTION³

▲ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
------------	--

ACCESSORY (Order separately)

PS-24VDC90W02	24VDC 90 watt power supply; 0-10V dimmable, specify 120V or 277V input. 20' maximum remote distance. Express 10 day shipping option (XPS) available. Can power maximum of (3) CV5700PSX fixtures using a single power supply
----------------------	--

MERIDIAN ROUND (cont.)

CV5700PSX (ADA), CV5702PSX and 5704PSX Sconces - Low Voltage



MERIDIAN ROUND PRODUCT FAMILY

- CP5700 - 24" Pendant
- CP5702 - 36" Pendant
- CP5704 - 48" Pendant
- CV5700PSX - 24" Sconce - Low Voltage
- CV5702PSX - 36" Sconce - Low Voltage
- CV5704PSX - 48" Sconce - Low Voltage

See [Visalighting.com/products/Meridian-Round](https://visalighting.com/products/Meridian-Round) for more information

SUGGESTED VARIATIONS

- Custom colors
- Pendant mount
- Surface mounted driver compartment

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative	

Metal Finish (Premium)

BA Brushed Aluminum