

OP2124 ZUME™

12" Stem Suspension


VisaLighting.com/products/Zume

Type: _____ Project: _____ Location: _____




DIMENSIONS⁶

OAH MUST BE SPECIFIED


DIA = Diameter OAH = Overall Height X = Body Height WT=Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(107) indicates an overall fixture height of 107"

DIA	12"	(305 mm)
X	12-1/4"	(311 mm)
MIN OAH	17"	(432 mm)
STD OAH	42"	(1067 mm)
MAX OAH	107"	(2718 mm)
WT	8 lbs	

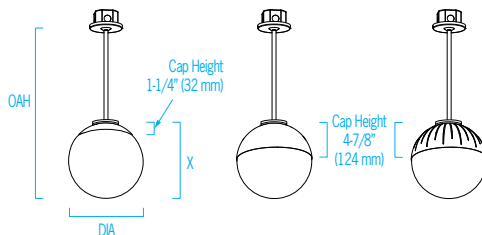

RELATIVE SCALE DRAWING

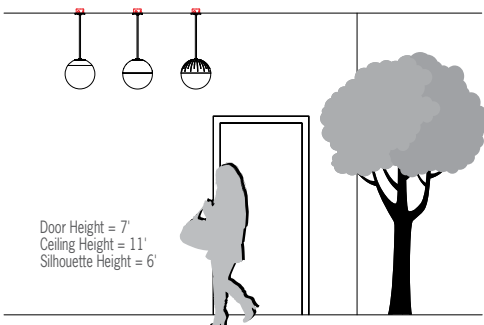

ETL Listed


5 Year Warranty

800-788-VISA


FEATURES

- High and low lumen output
- Integral driver
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45° from horizontal
- 3 spun aluminum cap styles (short, solid, slotted); cast aluminum mounting component
- **Top tether option. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Mounts to standard junction box (by others)
- White acrylic diffuser or frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish; 16 color options
- ETL listed for wet locations


PHOTOMETRICS




Short Cap White




Solid Cap White




Slotted Cap White



Short Cap Frosted



Solid Cap Frosted



Slotted Cap Frosted

OP2124 ZUME (cont.)

12" Stem Suspension



Fill in shaded boxes using information listed below

OP2124		- MVOLT					
MODEL	CAP ¹	SOURCE ²	VOLTAGE	FINISH ³	DIFFUSER ⁴	TETHER OPTION ⁵	OAH ⁶
	ShortCAP SolidCAP SlottedCAP	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	MVOLT	AG7038 BMAT BRNZ BSIL CVBL CW9001 GLIM GSIL GW9002 HTHR JB9005 OBRZ PB1035 RUST SUNG TW9016	AC FRST	TH	

CAP¹ (Select One)

ShortCAP	Short cap
SolidCAP	Solid cap
SlottedCAP	Slotted cap



Short Cap (ShortCAP)



Solid Cap (SolidCAP)



Slotted Cap (SlottedCAP)

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens						Power (Watts)
		Short Cap White	Short Cap FRST	Solid Cap White	Solid Cap FRST	Slotted Cap White	Slotted Cap FRST	
L30K(H)	3000K	1700	1900	1200	1400	1300	1500	17
L30K(L)	3000K	1100	1200	800	900	800	900	10
L35K(H)	3500K	1800	1900	1200	1500	1300	1500	17
L35K(L)	3500K	1100	1200	800	900	800	900	10
L40K(H)	4000K	1800	2000	1300	1500	1300	1500	17
L40K(L)	4000K	1100	1200	800	900	800	1000	10

VOLTAGE

MVOLT fixture accepts 120 through 277 input voltage

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OP2124 ZUME (cont.)

12" Stem Suspension

FINISH³ – CAPS (Select one)

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#)

Powder Coat Painted Finishes (Standard) See visalighting.com/finishes for all of our finishes (not all available on all models)

AG7038	Agate Grey	CVBL	Cove Blue	GW9002	Grey White	PB1035	Pearl Beige
BMAT	Bronze Matte	CW9001	Cream	HTHR	Heather	RUST	Rust
BRNZ	Bronze	GLIM	Glimmer Graphite	JB9005	Jet Black	SUNG	Sungold
BSIL	Blade Silver	GSIL	Silver	OBRZ	Old Bronze	TW9016	Traffic White

DIFFUSER⁴ (Select One)

- AC** White acrylic globe
FRST Frosted translucent globe




White



Frosted Translucent

TETHER OPTION⁵

- TH** Top tether option; four 15' cable tethers included

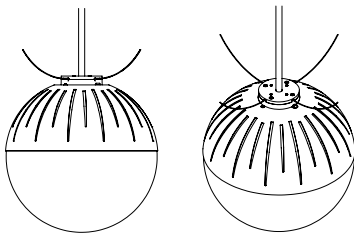

ZUME PRODUCT FAMILY

Cord and Cable Suspension	• OP2120-ShortCap – 12" • OP2130-ShortCap – 16" • OP2140-ShortCap – 20"	• OP2120-SolidCap – 12" • OP2130-SolidCap – 16" • OP2140-SolidCap – 20"	• OP2120-SlottedCap – 12" • OP2130-SlottedCap – 16" • OP2140-SlottedCap – 20"
Catenary Suspension	• OP2122-ShortCap – 12" • OP2132-ShortCap – 16" • OP2142-ShortCap – 20"	• OP2122-SolidCap – 12" • OP2132-SolidCap – 16" • OP2142-SolidCap – 20"	• OP2122-SlottedCap – 12" • OP2132-SlottedCap – 16" • OP2142-SlottedCap – 20"
Stem Suspension	• OP2124-ShortCap – 12" • OP2134-ShortCap – 16" • OP2144-ShortCap – 20"	• OP2124-SolidCap – 12" • OP2134-SolidCap – 16" • OP2144-SolidCap – 20"	• OP2124-SlottedCap – 12" • OP2134-SlottedCap – 16" • OP2144-SlottedCap – 20"

SUGGESTED VARIATIONS

- Custom cap options
- Tether used to angle fixture

See [Visalighting.com/products/Zume](https://visalighting.com/products/Zume) for more information