

OP2130 ZUME™

16" Cord and Cable Suspension


VisaLighting.com/products/Zume

Type: _____ Project: _____ Location: _____




DIMENSIONS⁵

OAH MUST BE SPECIFIED


DIA = Diameter OAH = Overall Height X = Body Height WT=Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(42) indicates an overall fixture height of 42"

DIA 16" (406 mm)
X 16-1/4" (413 mm)
OAH 42" (1067 mm)
WT 9 lbs

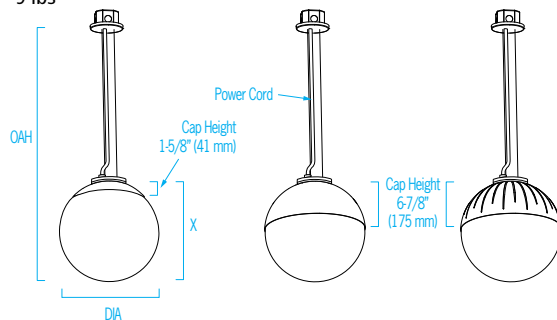

RELATIVE SCALE DRAWING

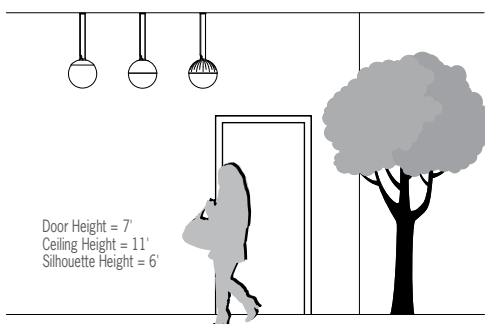

IP65



ETL Listed




5 Year Warranty


FEATURES

- High and low lumen output
- Integral driver
- IP65 rated
- Parallel mounting cables reduce twisting
- Mounts to standard electrical junction box (by others)
- **Tether cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Tether cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Black power cord
- 3 spun aluminum cap styles (short, solid, slotted); cast aluminum mounting component
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- White acrylic diffuser or frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish; 16 color options
- ETL listed for wet locations


PHOTOMETRICS




Short Cap White




Solid Cap White




Slotted Cap White



Short Cap Frosted



Solid Cap Frosted



Slotted Cap Frosted

OP2130 ZUME (cont.)

16" Cord and Cable Suspension

Fill in shaded boxes using information listed below

OP2130		- MVOLT					
MODEL	CAP ¹	SOURCE ²	VOLTAGE MVOLT	FINISH ³	DIFFUSER ⁴	OAH ⁵	
	ShortCAP SolidCAP SlottedCAP	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)		AG7038 BMAT BRNZ BSIL CVBL CW9001 GLIM GSIL GW9002 HTHR JB9005 OBRZ PB1035 RUST SUNG TW9016	AC FRST		

CAP¹ (Select One)

ShortCAP	Short cap
SolidCAP	Solid cap
SlottedCAP	Slotted cap



Short Cap (ShortCAP)



Solid Cap (SolidCAP)



Slotted Cap (SlottedCAP)

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens						Power (Watts)
		Short Cap White	Short Cap FRST	Solid Cap White	Solid Cap FRST	Slotted Cap White	Slotted Cap FRST	
L30K(H)	3000K	2600	2900	1600	1800	2100	2600	27
L30K(L)	3000K	1700	1800	1000	1200	1300	1600	17
L35K(H)	3500K	2700	2900	1600	1900	2200	2600	27
L35K(L)	3500K	1700	1900	1000	1200	1400	1700	17
L40K(H)	4000K	2700	3000	1700	1900	2200	2700	27
L40K(L)	4000K	1800	1900	1100	1200	1400	1700	17

VOLTAGE

MVOLT fixture accepts 120 through 277 input voltage

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OP2130 ZUME (cont.)

16" Cord and Cable Suspension



FINISH³ – CAPS (Select one)

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#)

Powder Coat Painted Finishes (Standard) See visalighting.com/finishes for all of our finishes (not all available on all models)							
AG7038	Agate Grey	CVBL	Cove Blue	GW9002	Grey White	PB1035	Pearl Beige
BMAT	Bronze Matte	CW9001	Cream	HTHR	Heather	RUST	Rust
BRNZ	Bronze	GLIM	Glimmer Graphite	JB9005	Jet Black	SUNG	Sungold
BSIL	Blade Silver	GSIL	Silver	OBRZ	Old Bronze	TW9016	Traffic White

DIFFUSER⁴ (Select One)

- AC** White acrylic globe
FRST Frosted translucent globe



White



Frosted Translucent

ZUME PRODUCT FAMILY

Cord and Cable Suspension	• OP2120-ShortCap — 12" • OP2130-ShortCap — 16" • OP2140-ShortCap — 20"	• OP2120-SolidCap — 12" • OP2130-SolidCap — 16" • OP2140-SolidCap — 20"	• OP2120-SlottedCap — 12" • OP2130-SlottedCap — 16" • OP2140-SlottedCap — 20"
Catenary Suspension	• OP2122-ShortCap — 12" • OP2132-ShortCap — 16" • OP2142-ShortCap — 20"	• OP2122-SolidCap — 12" • OP2132-SolidCap — 16" • OP2142-SolidCap — 20"	• OP2122-SlottedCap — 12" • OP2132-SlottedCap — 16" • OP2142-SlottedCap — 20"
Stem Suspension	• OP2124-ShortCap — 12" • OP2134-ShortCap — 16" • OP2144-ShortCap — 20"	• OP2124-SolidCap — 12" • OP2134-SolidCap — 16" • OP2144-SolidCap — 20"	• OP2124-SlottedCap — 12" • OP2134-SlottedCap — 16" • OP2144-SlottedCap — 20"

SUGGESTED VARIATIONS

- Link fixtures together to create a chain
- Custom cap options

See [Visalighting.com/products/Zume](https://visalighting.com/products/Zume) for more information

OP2130 ZUME (cont.)

Tether Accessories



TETHER ACCESSORIES (Order Separately)

Stainless Steel
Compression Sleeve
(AY-CS3/32)



Qty (10)

3/32" Stainless Steel Cable
(AY-CBL3/32-50)



50 feet

Accessory	Quantity

Accessories are made for Visa Lighting canopy mount fixture applications.
If sourced elsewhere, materials must be of equivalent grade.
For important information about accessory applications and installation, see Installation Instructions