


OP2222/OP2223/OP2224 SEQUENCE™

4" Diameter Outdoor Pendants – Cord and Cable Suspension



VisaLighting.com/products/Sequence

Type: _____ Project: _____ Location: _____

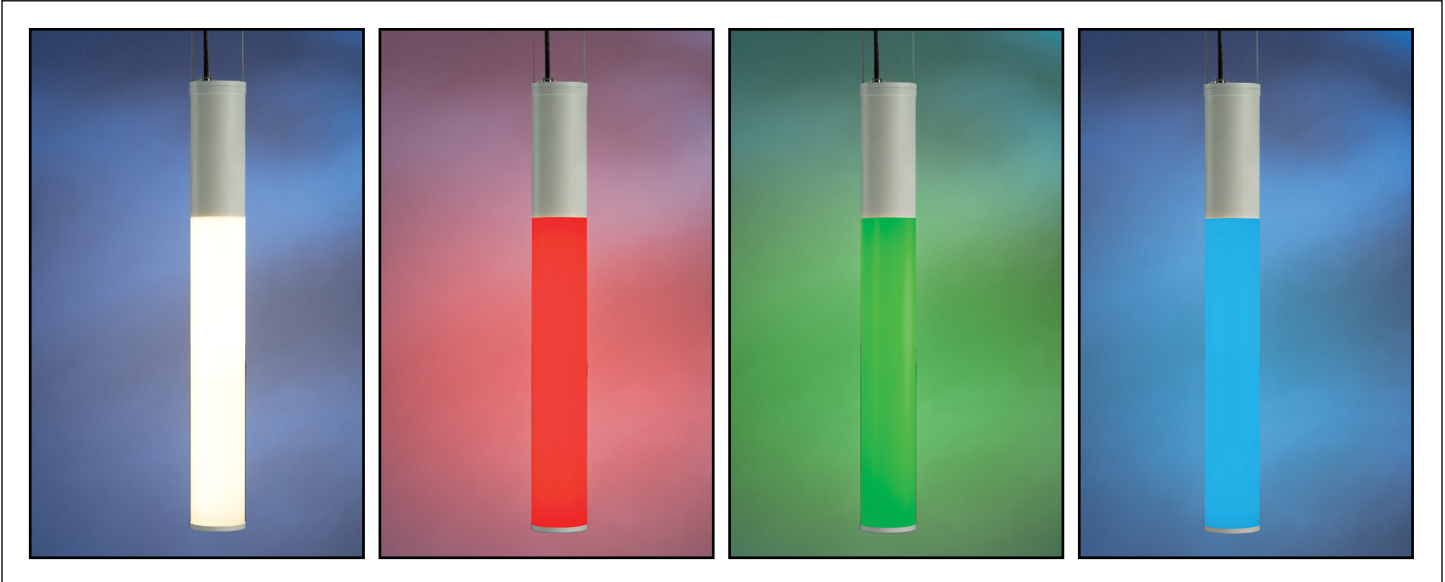

DIMENSIONS^{1,4}

OAH MUST BE SPECIFIED

DIA = Diameter X = Body Height OAH = Overall Height
Y = Driver Compartment Height



OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(48) indicates an overall fixture height of 48"

	OP2222	OP2223	OP2224
X	33-1/4" (845 mm)	44-1/4" (1124 mm)	55-1/4" (1403 mm)
X w/ BTH option	Add 1/2" to X		
DIA	4" (102 mm)		
Y	9" (229 mm)		
OAH	48" (1219 mm)	60" (1524 mm)	72" (1829 mm)


FEATURES

- High or low lumen output
- Integral driver (compartment at top of fixture)
- RGB is DMX controlled with RDM for digital addressing
- IP65 rated
- Parallel mounting cables reduce twisting
- Mounts to standard electrical junction box (by others)
- **Tether cables connecting fixtures to each other are considered structural and are to be designed by a qualified structural engineer**
- Tether cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Crossing secondary cables at the bottom Tether are limited to 1/8" when the primary cable is 1/4"
- Black power cord
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- Matte white acrylic diffuser
- Driver compartment acrylic is painted with low VOC acrylic-urethane wet paint with anti-graffiti additive
- No VOC powder coat finish on end caps and mounting component
- ETL listed for wet locations

RELATIVE SCALE DRAWING

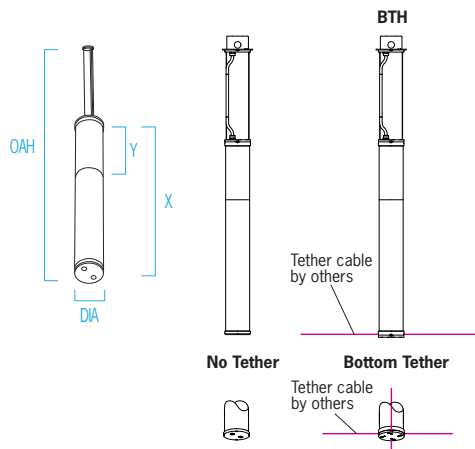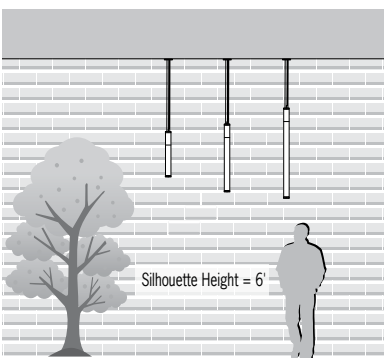

PHOTOMETRICS

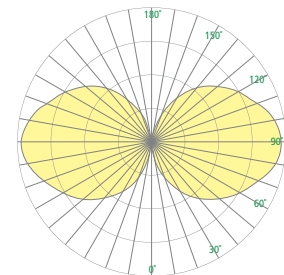

OP2222/OP2223/OP2224 SEQUENCE (cont.)



4" Diameter Outdoor Pendants – Cord and Cable Suspension

Fill in shaded boxes using information listed below

MVOLT					
MODEL¹ OP2222 OP2223 OP2224 See page 1	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) RGB	VOLTAGE MVOLT	FINISH See last page for finish order codes	MOUNTING OPTION³ BTH	OAH⁴ See page 1

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	OP2222		OP2223		OP2224	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K(H)	3000K	1100	12	2000	22	2600	29
L30K(L)	3000K	750	8	1300	14	1700	18
L35K(H)	3500K	1100	12	2000	22	2600	29
L35K(L)	3500K	750	8	1300	14	1700	18
L40K(H)	4000K	1100	12	2000	22	2600	29
L40K(L)	4000K	750	8	1300	14	1700	18
RGB			14		21		29

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

LUMEN MAINTENANCE RATING

L80 (reported)	>60,000 hrs
----------------	-------------

MOUNTING OPTION³

No tether bottom is included if no option is selected

BTH	Bottom tether attachment (Tether option is recommended for high wind. A tether cable is to restrict movement of the light fixture and not provide structural support. See Catenary Design Guide for important information and warnings)
------------	---

TETHER ACCESSORIES (Order Separately)

Stainless Steel Compression Sleeve
(AY-CS3/32)




Qty (10)

3/32" Stainless Steel Cable
(AY-CBL3/32-50)



50 feet

Tether Example

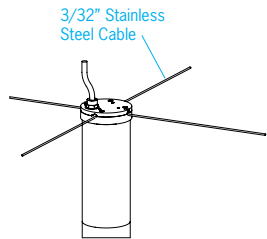

Accessory	Quantity

Accessories available for Visa Lighting's Outdoor Pendant (OP) applications. If sourced elsewhere, materials must be of equivalent grade. For important information about accessory applications and installation, see [Installation Instructions](#).

OP2222/OP2223/OP2224 SEQUENCE (cont.)

4" Diameter Outdoor Pendants – Cord and Cable Suspension



SEQUENCE OUTDOOR PENDANT PRODUCT FAMILY

Catenary	4" Diameter	• OP2232 , OP2233 , OP2234
	8" Diameter	• OP2262 , OP2263 , OP2264
Cord and Cable	4" Diameter	• OP2222 , OP2223 , OP2224
	8" Diameter	• OP2252 , OP2253 , OP2254
Stem	4" Diameter	• OP2242 , OP2243 , OP2244
	8" Diameter	• OP2272 , OP2273 , OP2274

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/Products/Sequence](https://www.visalighting.com/Products/Sequence) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit [visalighting.com/finishes](https://www.visalighting.com/finishes)

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red