


OP2242/ OP2243/ OP2244 SEQUENCE™

4" Diameter Outdoor Pendants – Stem Suspension



VisaLighting.com/products/Sequence

Type: _____ Project: _____ Location: _____

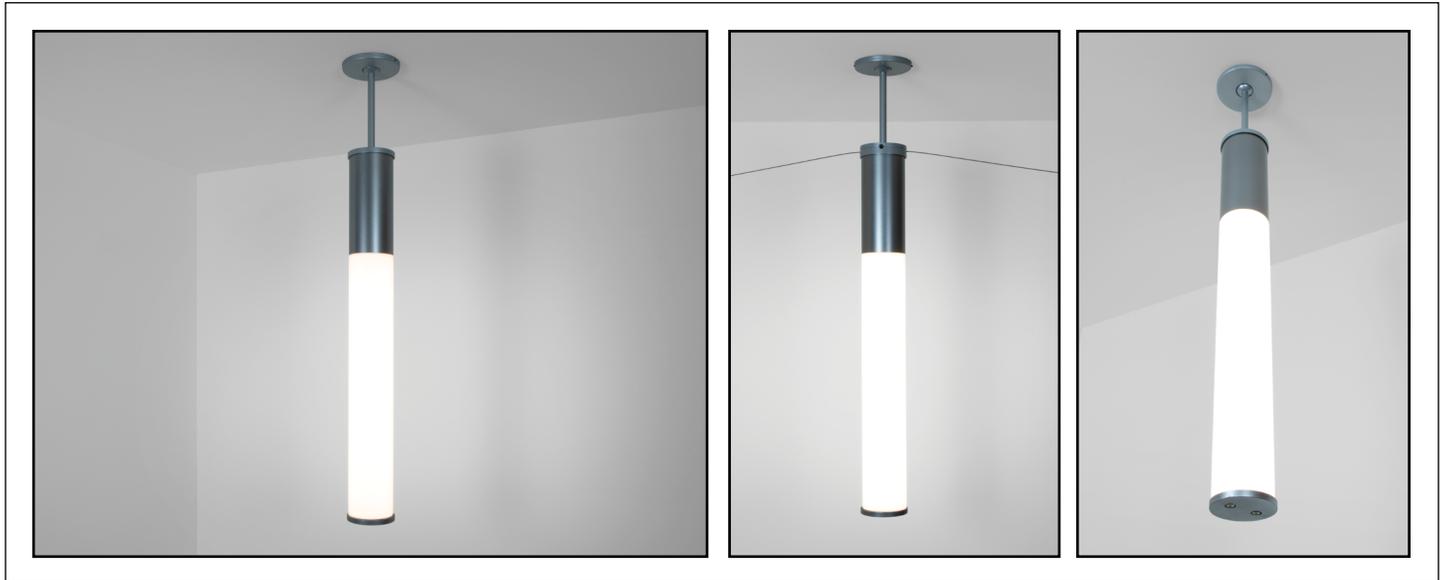

DIMENSIONS^{1,4}

OAH MUST BE SPECIFIED

DIA = Diameter X = Body Height OAH = Overall Height
Y = Driver Compartment Height


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(48) indicates an overall fixture height of 48"

	OP2242	OP2243	OP2244
X	33-1/4" (845 mm)	44-1/4" (1124 mm)	55-1/4" (1403 mm)
DIA	4" (102 mm)		
Y	9" (229 mm)		
MIN OAH	38-1/4" (972 mm)	49-1/4" (1251 mm)	60-1/4" (1531 mm)
OAH	48" (1219 mm)	60" (1524 mm)	72" (1829 mm)
MAX OAH	128" (3251 mm)	138" (3505 mm)	150" (3810 mm)


FEATURES

- High or low lumen output
- Integral driver (compartment at top of fixture)
- RGB is DMX controlled with RDM for digital addressing
- Mounts to standard 8" octagonal junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- **Top tether option. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Matte white acrylic diffuser
- Driver compartment acrylic is painted with low VOC acrylic-urethane wet paint with anti-graffiti additive
- No VOC powder coat finish on end caps and mounting component
- ETL listed for wet locations

RELATIVE SCALE DRAWING

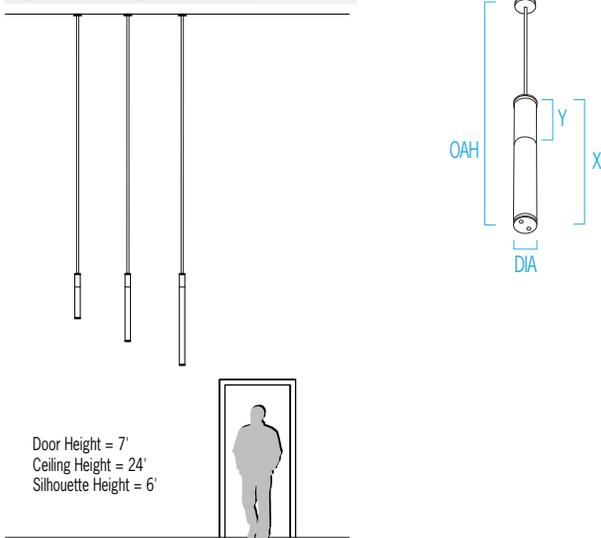

PHOTOMETRICS



OP2242/ OP2243/ OP2244 SEQUENCE (cont.)



4" Diameter Outdoor Pendants – Stem Suspension

Fill in shaded boxes using information listed below

OP2242		-		MVOLT					
MODEL¹ OP2242 OP2243 OP2244 See page 1		SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) RGB		VOLTAGE MVOLT		FINISH See last page for finish order codes		MOUNTING OPTION³ TH	
								See page 1	

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	OP2242		OP2243		OP2244	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K(H)	3000K	1100	12	2000	22	2600	29
L30K(L)	3000K	750	8	1300	14	1700	18
L35K(H)	3500K	1100	12	2000	22	2600	29
L35K(L)	3500K	750	8	1300	14	1700	18
L40K(H)	4000K	1100	12	2000	22	2600	29
L40K(L)	4000K	750	8	1300	14	1700	18
RGB			14		21		29

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

LUMEN MAINTENANCE RATING

L80 (reported)	>60,000 hrs
----------------	-------------

MOUNTING OPTION³

TH	Top tether option; four 15' cable tethers
-----------	---

Tether Example



OP2242/ OP2243/ OP2244 SEQUENCE (cont.)



4" Diameter Outdoor Pendants – Stem Suspension

SEQUENCE OUTDOOR PENDANT PRODUCT FAMILY

Catenary	4" Diameter	• OP2232 , OP2233 , OP2234
	8" Diameter	• OP2262 , OP2263 , OP2264
Cord and Cable	4" Diameter	• OP2222 , OP2223 , OP2224
	8" Diameter	• OP2252 , OP2253 , OP2254
Stem	4" Diameter	• OP2242 , OP2243 , OP2244
	8" Diameter	• OP2272 , OP2273 , OP2274

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/Products/Sequence](https://visalighting.com/Products/Sequence) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red