

IMAGE™

OW1291_ OW1293_ OW1295_ OW1297
Outdoor Wall



Visalighting.com/products/Image

Type: _____ Project: _____ Location: _____




DIMENSIONS¹

Depth is measured from wall to front of fixture

L = Length W = Width D = Depth


	OW1291	OW1293	OW1295	OW1297
L	20-3/8" (518 mm)	25-7/8" (657 mm)	36-7/8" (937 mm)	47-7/8" (1216 mm)
W	7-1/4" (184 mm)			
D	4" (102 mm)			

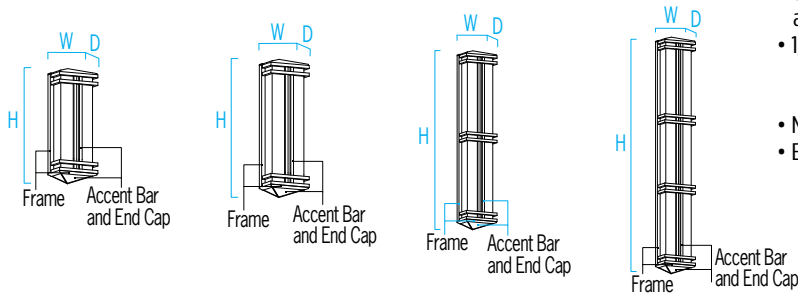


FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Removable cam-action hinged frame for ease of maintenance
- Vertical mounting standard (horizontal mounting optional)
- Mounts over standard electrical junction box (by others) with provided hardware.
- Extruded aluminum backplate, die-cast end caps, vertical center accent and frame side rails. Solid metal formed accent bars, gasketed and sealed construction
- 1/8" thick white acrylic diffuser
 - F1 rated, UV stable
 - UL-94 HB Flame Class rated
- No VOC powder coat paint finish
- ETL listed for wet location mounting 4' above grade

RELATIVE SCALE DRAWING

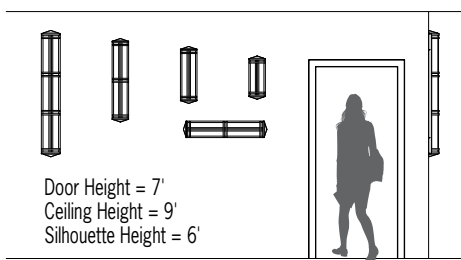

PHOTOMETRICS

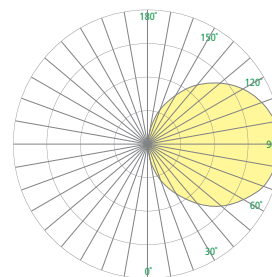

XPS



ADA Compliant



ETL Listed



5 Year Warranty

IMAGE (cont.)

OW1291_ OW1293_ OW1295_ OW1297

Outdoor Wall

Fill in shaded boxes using information listed below

MODEL ¹		SOURCE ²		VOLTAGE MVOLT		FRAME FINISH		ACCENT BAR AND END CAP FINISH		OPTION(S) ³	
OW1291	OW1293	• L30K(H)	• L30K(L)							HM	XPS
OW1295	OW1297	• L35K(H)	• L35K(L)								
		• L40K(H)	• L40K(L)								

See page 1

See last page for finish order codes

See last page for finish order codes

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	OW1291		OW1293		OW1295		OW1297	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	1200	15	1700	19	2500	29	3400	38
• L30K(L)	3000K	800	9	1100	13	1700	19	2300	25
L35K(H)	3500K	1200	15	1700	19	2500	29	3400	38
L35K(L)	3500K	800	9	1100	13	1700	19	2300	25
• L40K(H)	4000K	1300	15	1700	19	2600	29	3500	38
• L40K(L)	4000K	850	9	1100	13	1700	19	2300	25

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OPTIONS³ (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options

HM	Horizontal mount (vertical is standard)
XPS	Express 10 day shipping. Items marked with a bullet (●) are not available with XPS

IMAGE (cont.)

0W1291_ 0W1293_ 0W1295_ 0W1297

Outdoor Wall

IMAGE PRODUCT FAMILY

Indoor	Wall/Ceiling	20"	• CV1901
		26"	• CV1903
		37"	• CV1905
		48"	• CV1907
Outdoor	Wall	20"	• 0W1291
		26"	• 0W1293
		37"	• 0W1295
		48"	• 0W1297

SUGGESTED VARIATIONS

- Custom colors
- Custom bar arrangements/additions
- Fixture lengths

See [Visalighting.com/products/Image](https://visalighting.com/products/Image) for more information

IMAGE (cont.)

OW1291_ OW1293_ OW1295_ OW1297

Outdoor Wall



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard) for Frame or Accent Bar and End Cap Finish

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red

Metal Finishes (Premium) for Accent Bar and End Cap only

BSS Brushed Stainless Steel	PSS Polished Stainless Steel