
## **RAVEN**™


### OW1340/OW1342/OW1344/OW1346/OW1348 Outdoor models with Accent Bars



VisaLighting.com/products/Raven

Type: Project: Location:

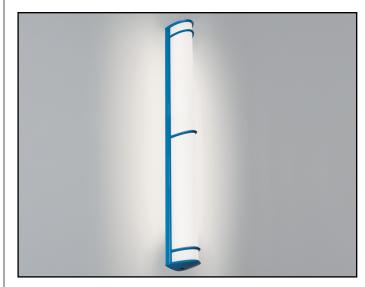

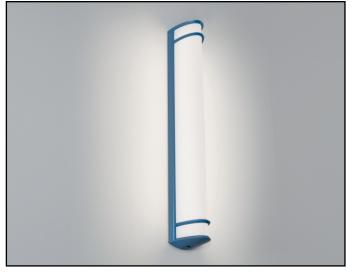


#### DIMENSIONS1


	OW1348	0W1340	OW1342	0W1344	OW1346						
L	18-1/2" (470 mm)	24-3/4" (629 mm)	36-1/2" (927 mm)	48-3/8" (1229 mm)	60-1/8" (1527 mm)						
D	4" (102 mm)										
W	3 -3/8" (86 mm)										

#### **FEATURES**

- Integral driver
- · Vertical or horizontal mounting
- Mounts to 2 X 4 electrical junction box (by others) with provided hardware. Requires auxiliary mounting fasteners (provided). Orient junction box to match fixture's linear dimension (horizontal or vertical)
- Tamper resistant fasteners
- High impact extruded aluminum backplate/side rails, die-cast end caps and trim bars; gasketed and sealed construction
- Extruded clear prismatic performance lens and extruded white acrylic diffuser
- High impact extruded white acrylic, F1 rated; UV stable: UL-94 HB Flame Class rated
- No VOC powder coat finish
- ETL listed for wet location mounting 4' above grade

### **RELATIVE SCALE DRAWING**













ADA

XPS

d 5 Year Warranty

## RAVEN (cont.) 0W1340/0W1342/0W1344/0W1346/0W1348 Outdoor models with Accent Bars



#### Fill in shaded boxes using information listed below **MVOLT** MODEL1 SOURCE<sup>2</sup> OPTION3 **VOLTAGE FINISH** OW1348 • L30K(H) MVOLT XPS 0W1340 • L30K(L) See last page OW1342 L35K(H) for finish order codes OW1344 L35K(L) • L40K(H) 0W1346 • L40K(L) See page 1

#### SOURCE2 (Select One)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

		OW1348		OW1340		OW1342		0W1344		OW1346	
Source	ССТ	Delivered Lumens	Power/ Watts								
• L30K(H)	3000K	1100	10	1400	13	2800	26	3300	29	3900	35
• L30K(L)	3000K	750	7	800	7	1900	17	2200	19	2800	23
L35K(H)	3500K	1100	10	1400	13	2800	26	3300	29	3900	35
L35K(L)	3500K	750	7	800	7	1900	17	2200	19	2800	23
• L40K(H)	4000K	1100	10	1400	13	2900	26	3400	29	4100	35
• L40K(L)	4000K	750	7	800	7	2000	17	2300	19	2800	23

#### OPTION3

▲ Option availability may be interdependent with Other Options

XPS

Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

**VOLTAGE** 

MVOLT 120-277V, 50/60 Hz

#### **LUMEN MAINTENANCE RATING**

L80 (reported) >50,000hrs

#### Tamper Resistant Fastener



# RAVEN (cont.) 0W1340/0W1342/0W1344/0W1346/0W1348 0utdoor models with Accent Bars



#### RAVEN PRODUCT FAMILY

RAVEN PRODUCT FAMILY									
		• OW1348							
		• 0W1340							
	Outdoor	• 0W1342							
		• 0W1344							
Assault Davis		• 0W1346							
Accent Bars		• CV1818							
		• CV1800							
	Indoor	• CV1802							
		• CV1804							
		• CV1806							
		• 0W1350							
		• 0W1352							
	Outdoor	• 0W1354							
		• 0W1356							
No Accent Bars		• 0W1358							
NO ACCEUL DOLD		• CV1820							
		• CV1822							
	Indoor	• CV1824							
		• CV1826							
		• CV1828							

See <u>Visalighting.com/products/Raven</u> for more information

#### SUGGESTED VARIATIONS

- 2700k–5000k color temperatures
- Increase fixture length up to 8' (indoor only)

## RAVEN (cont.) 0W1340/0W1342/0W1344/0W1346/0W1348 Outdoor models with Accent Bars



#### **FINISHES**

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR S	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red