

RAVEN™


OW1350/OW1352/OW1354/OW1356/OW1358

Outdoor models no Accent Bars



VisaLighting.com/products/Raven

Type: _____ Project: _____ Location: _____

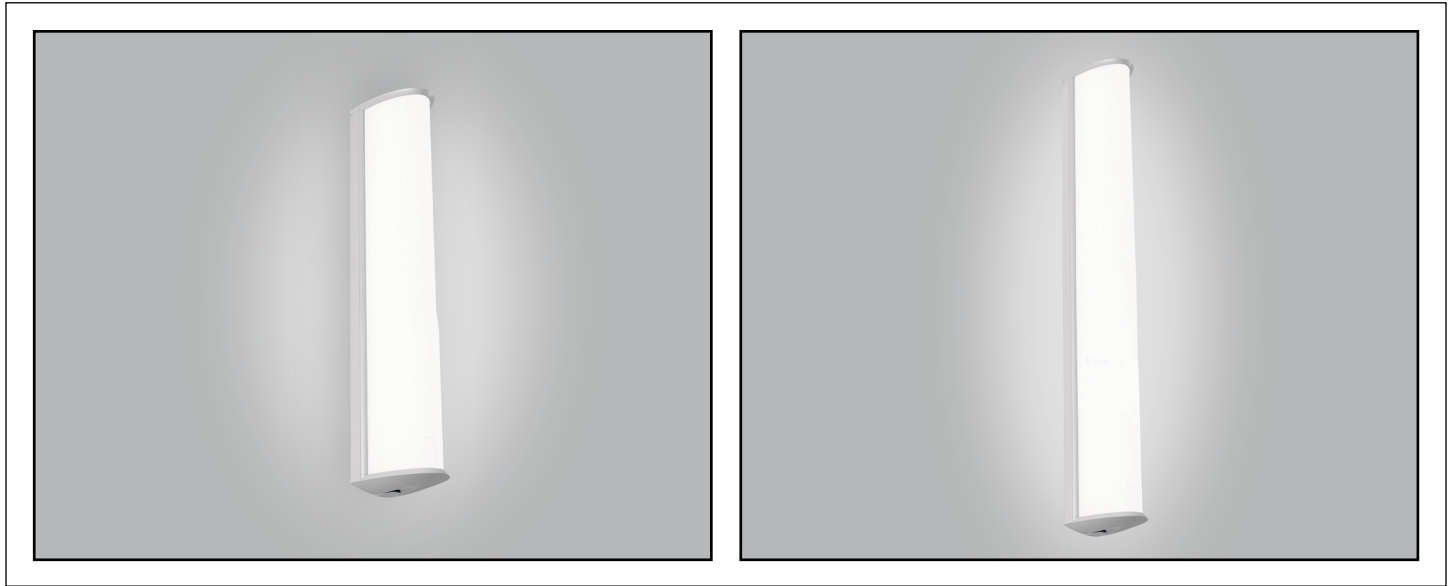

DIMENSIONS¹



L = Length D = Depth W = Width WT = Weight

	OW1350	OW1352	OW1354	OW1356	OW1358
L	18-1/2" (470 mm)	24-3/4" (629 mm)	36-1/2" (927 mm)	48-3/8" (1229 mm)	60-1/8" (1527 mm)
D	4" (102 mm)				
W	3 -3/8" (86 mm)				


FEATURES

- Integral driver
- Vertical or horizontal mounting
- Mounts to 2 X 4 electrical junction box (by others) with provided hardware. Requires auxiliary mounting fasteners (provided). Orient junction box to match fixture's linear dimension (horizontal or vertical)
- Tamper resistant fasteners
- High impact extruded aluminum backplate/side rails, die-cast end caps; gasketed and sealed construction
- Extruded clear prismatic performance lens and extruded white acrylic diffuser
- High impact extruded white acrylic, F1 rated; UL-94 HB Flame Class rated
- No VOC powder coat finish
- ETL listed for wet location mounting 4' above grade

RELATIVE SCALE DRAWING

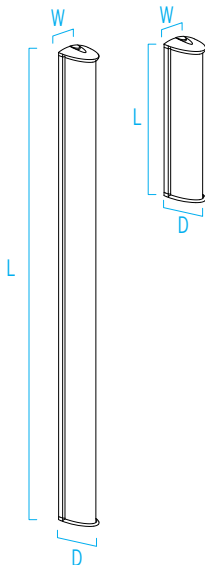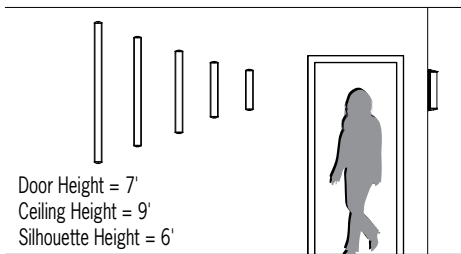

PHOTOMETRICS

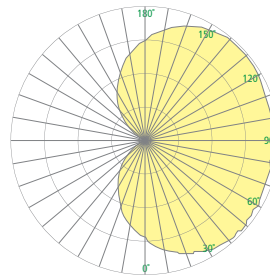

ADA



XPS



ETL Listed



5 Year Warranty

RAVEN (cont.)

OW1350/OW1352/OW1354/OW1356/OW1358

Outdoor models no Accent Bars



Fill in shaded boxes using information listed below

		- MVOLT			
MODEL¹ OW1350 OW1352 OW1354 OW1356 OW1358 See page 1	SOURCE² • L30K(H) • L30K(L) • L35K(H) • L35K(L) • L40K(H) • L40K(L)	VOLTAGE MVOLT	FINISH See last page for finish order codes	OPTION³ XPS	

SOURCE² (Select One)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	OW1350		OW1352		OW1354		OW1356		OW1358	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
• L30K(H)	3000K	1100	10	1400	13	2800	26	3300	29	3900	35
• L30K(L)	3000K	750	7	800	7	1900	17	2200	19	2800	23
L35K(H)	3500K	1100	10	1400	13	2800	26	3300	29	3900	35
L35K(L)	3500K	750	7	800	7	1900	17	2200	19	2800	23
• L40K(H)	4000K	1100	10	1400	13	2900	26	3400	29	4100	35
• L40K(L)	4000K	750	7	800	7	2000	17	2300	19	2800	23

OPTION³

⚠ Option availability may be interdependent with Other Options

XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS
------------	--

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

LUMEN MAINTENANCE RATING

L80 (reported)	>50,000hrs
----------------	------------

Tamper Resistant Fastener



RAVEN (cont.)

OW1350/OW1352/OW1354/OW1356/OW1358
Outdoor models no Accent Bars

RAVEN PRODUCT FAMILY

Accent Bars	Outdoor	<ul style="list-style-type: none"> • OW1348 • OW1340 • OW1342 • OW1344 • OW1346
	Indoor	<ul style="list-style-type: none"> • CV1818 • CV1800 • CV1802 • CV1804 • CV1806
No Accent Bars	Outdoor	<ul style="list-style-type: none"> • OW1350 • OW1352 • OW1354 • OW1356 • OW1358
	Indoor	<ul style="list-style-type: none"> • CV1820 • CV1822 • CV1824 • CV1826 • CV1828

SUGGESTED VARIATIONS

- 2700k–5000k color temperatures
- Increase fixture length up to 8' (indoor only)

See [Visalighting.com/products/Raven](https://visalighting.com/products/Raven) for more information

RAVEN (cont.)

OW1350/OW1352/OW1354/OW1356/OW1358

Outdoor models no Accent Bars



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red