

# OW1600/OW1604/OW1606/OW1610 VISAGE™

Outdoor — Surface Frame



[VisaLighting.com/products/Visage](https://VisaLighting.com/products/Visage)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




## DIMENSIONS<sup>1</sup>


W = Width L = Length D = Depth RD = Recessed Depth  
RL = Recessed Length

Depth is measured from wall to front of fixture

	OW1600	OW1604	OW1606	OW1610
L	25-1/2" (648 mm)	37-1/2" (953 mm)	49" (1245 mm)	61" (1549 mm)
W	6-1/8" (156 mm)			
D	1" (25 mm)			
RD	3-3/8" (86 mm)			
RL	24-1/4" (616 mm)	36-3/8" (924 mm)	47-7/8" (1216 mm)	59-7/8" (1521 mm)

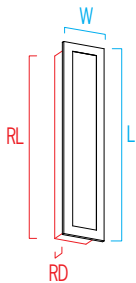


## RELATIVE SCALE DRAWING

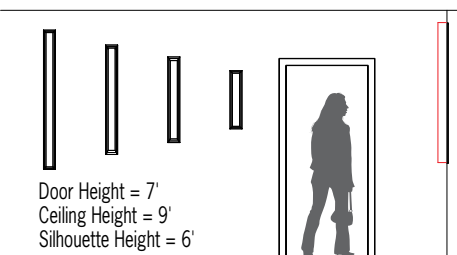

## FEATURES

- Integral driver
- Shallow 3-3/8" recessed housing
- Vertical or horizontal mounting
- Extruded aluminum frame
- Rated for insulation contact
- 3/16" thick white acrylic diffuser
- ETL listed for wet locations

## PHOTOMETRICS

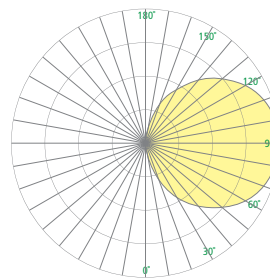

ADA



ETL Listed



5 Year Warranty

## OW1600/OW1604/OW1606/OW1610 VISAGE (cont.)



## Outdoor — Surface Frame

Fill in shaded boxes using information listed below

MODEL <sup>1</sup>		SOURCE <sup>2</sup>		VOLTAGE MVOLT		FINISH		OPTIONS <sup>3</sup>	
OW1600	OW1604	• L30K(H)	• L30K(L)					HPC	
OW1606	OW1610	• L35K(H)	• L35K(L)					RB	
		• L40K(H)	• L40K(L)					XPS	
See page 1						See last page for finish order codes			

SOURCE<sup>2</sup> (Select One)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	OW1610		OW1604"		OW1606"		OW1610"	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	1400	20	2100	29	2800	38	3400	45
• L30K(L)	3000K	900	12	1350	18	1900	23	2200	29
L35K(H)	3500K	1450	20	2100	29	2900	38	3500	45
L35K(L)	3500K	950	12	1400	18	1950	23	2300	29
• L40K(H)	4000K	1450	20	2100	29	2900	38	3500	45
• L40K(L)	4000K	950	12	1450	18	1950	23	2300	29

## VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OPTIONS<sup>3</sup> (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Voltage, Source or Other Options

HPC	Housing for poured concrete
RB	Pre-ship recessed box
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

# OW1600/OW1604/OW1606/OW1610 VISAGE (cont.)



## Outdoor — Surface Frame

### VISAGE PRODUCT FAMILY

<b>Outdoor</b>	<ul style="list-style-type: none"> <li>• OW1600 — Surface Frame</li> <li>• OW1604 — Surface Frame</li> <li>• OW1606 — Surface Frame</li> <li>• OW1610 — Surface Frame</li> </ul>
<b>Indoor Wall/Ceiling</b>	<ul style="list-style-type: none"> <li>• CV1601 — Surface Frame</li> <li>• CV1603 — Surface Frame</li> <li>• CV1605 — Surface Frame</li> <li>• CV1607 — Surface Frame</li> <li>• CV1609 — Flush Frame</li> <li>• CV1611 — Flush Frame</li> <li>• CV1613 — Flush Frame</li> <li>• CV1615 — Flush Frame</li> <li>• CV1680 — Behavioral Health</li> </ul>

### SUGGESTED VARIATIONS

- Custom color or material
- Increase or decrease fixture height and/or width
- Special lens or diffuser inserts

See [Visalighting.com/products/Visage](https://visalighting.com/products/Visage) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red