
OW1713 NORTHRIDGE™

18" Wall Mount



Visalighting.com/products/Northridge

Type: Project: Location:

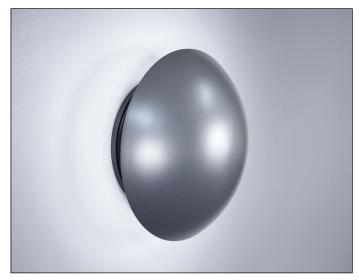




DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W 18-1/4" (464 mm) H 18-1/4" (464 mm)


D 8-5/8" (219 mm)




FEATURES

- · Integral driver
- Modular design for replacement of LED source and driver
- Surface mount to standard electrical junction box (by others) with provided hardware
- Aluminum front shield features snap lock for easy tool-less servicing
- Aluminum, fully gasketed and sealed source chamber with clear tempered glass enclosure
- No VOC powder coat paint finish
- ETL listed for wet location mounting to 4' above grade

RELATIVE SCALE DRAWING



PHOTOMETRICS










χpς

J icui Wallality

OW1713 NORTHRIDGE (cont.)

18" Wall Mount



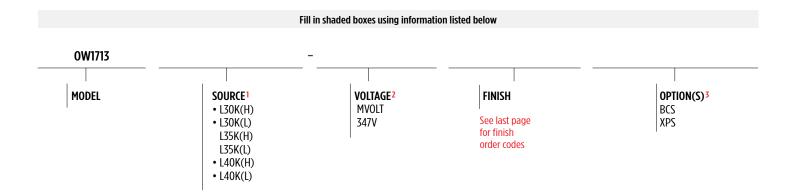

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	ССТ	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	2100	51
• L30K(L)	3000K	1400	31
L35K(H)	3500K	2100	51
L35K(L)	3500K	1400	31
• L40K(H)	4000K	2100	51
• L40K(L)	4000K	1400	31

VOLTAGE² (Select one)

MVOLT	120-277V, 50/60 Hz	
347V	347V, 50/60 Hz	

OPTIONS³ (Multiple Selections Allowed)

▲ Option availability may be interdependent with Other Options

I	BCS	Brightness control shield for steep viewing angle
	XPS Express 10 day shipping. Items marked with a bullet (●) are not available with XPS	

OW1713 NORTHRIDGE (cont.) 18" Wall Mount



NORTHRIDGE PRODUCT FAMILY

- 0W1709 14" Wall Mount
- 0W1713 18" Wall Mount

See <u>Visalighting.com/products/Northridge</u> for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

