

# 0W2207 Pla™

## 4 Square Accents



[Visalighting.com/products/Pla](http://Visalighting.com/products/Pla)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




### DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth


W	8-5/8"	(219 mm)
H	18"	(178 mm)
D	10-5/8"	(270 mm)

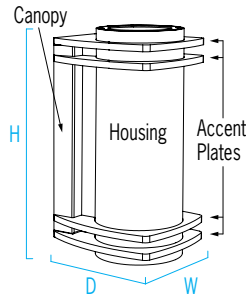


### FEATURES

- Integral high power factor electronic driver with MVOLT operation in wall bracket canopy
- Modular design for replacement of LED source and driver
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- Mounts over 4" junction box
- Tamper resistant fasteners
- Meets seismic guidelines for weight
- Cast and fabricated aluminum
- No VOC powder coat paint finish

### RELATIVE SCALE DRAWING

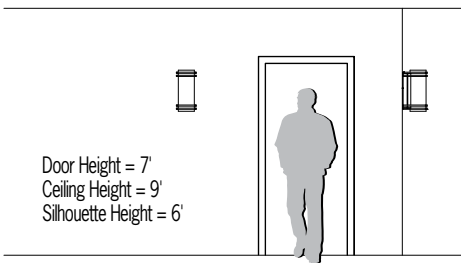

### PHOTOMETRICS (per direction - up/down)

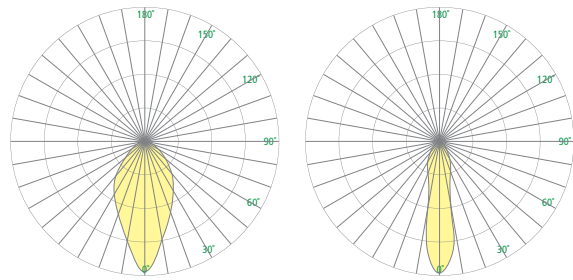

IP65



ETL Listed



5 Year Warranty

# OW2207 Plā (cont.)

## 4 Square Accents



Fill in shaded boxes using information listed below

OW2207					MVOLT		
MODEL	UPLIGHT SOURCE <sup>1</sup>	UPLIGHT OPTIC <sup>2</sup>	DOWNLIGHT SOURCE <sup>3</sup>	DOWNLIGHT OPTIC <sup>4</sup>	VOLTAGE MVOLT	CANOPY & HOUSING FINISH	ACCENT PLATE FINISH
	AMB BLU L30K L35K L40K NONE	MED NRW P NONE	AMB BLU L30K L35K L40K NONE	MED NRW P NONE			
	AMB and BLU available in Pencil Beam Optic Only		AMB and BLU available in Pencil Beam Optic Only			See last page for finish order codes	See last page for finish order codes

SOURCES – UPLIGHT<sup>1</sup> & DOWNLIGHT<sup>3</sup> (Select one each)  
OPTICS – UPLIGHT<sup>2</sup> & DOWNLIGHT<sup>4</sup> (Select one each)

Dimmable 0-10V to minimum 10% and are 93CRI, within 3-step MacAdam


Source	CCT	per direction (up/down)			Optic
		Delivered MED	Delivered NRW	Power (Watts)	
L30K	3000K	2200	1600	29	MED (50° Beam) NRW (23° Beam)
L35K	3500K				
L40K	4000K				

White Pencil Beam Sources are 82CRI within 3-step MacAdam  
(Dimming not available with pencil beam optic)

		Delivered Pencil Beam (P)		
AMB		670	12	P (Pencil Beam) Not dimmable
BLU		230		
L30K	3000K	730		
L35K	3500K	750		
L40K	4000K	790		

NONE	If an uplight or downlight source and optic is not needed, choose none
------	--

VOLTAGE	
MVOLT	120-277V, 50/60 Hz

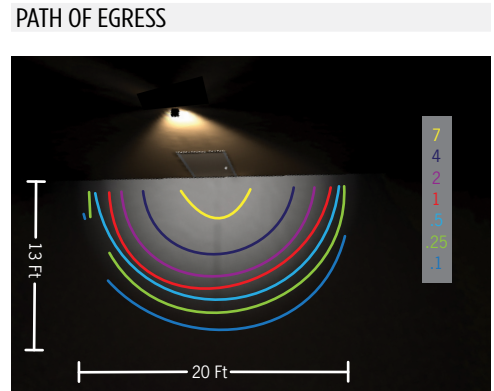

L35K, 50 degree beam spread, downlight only, mounted 16' above grade, .70 light loss factor used

# OW2207 Plā (cont.)

## 4 Square Accents



### Plā PRODUCT FAMILY

### SUGGESTED VARIATIONS

<b>No Accents</b>		• <a href="#">OW2201</a>
<b>1 Accent</b>	Square	• <a href="#">OW2203</a>
	Round	• <a href="#">OW2205</a>
<b>4 Accents</b>	Square	• <a href="#">OW2207</a>
	Round	• <a href="#">OW2209</a>
<b>3 Accents</b>	Square	• <a href="#">OW2211</a>
	Round	• <a href="#">OW2213</a>

- Custom colors

See [Visalighting.com/products/Pla](https://visalighting.com/products/Pla) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red