

OW2400 SASS™

Rectilinear



Visalighting.com/products/Sass

Type: _____ Project: _____ Location: _____




DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W	2-1/2"	(64 mm)
H	22"	(559 mm)
D	4"	(102 mm)


For mullion mounting, minimum required mullion width is 2-1/2"




FEATURES

- Integral (unless RMD option is selected) high power factor electronic driver
- 90+ CRI
- IP65 rated
- Vertical or horizontal mounting
- Bracket mounting system simplifies installation and maintenance
- Surface mount to 2x4 junction box or window mullion. Mullion mount requires RMD option and minimum 2.5" mullion. Optional junction box cover (JBC) available for 4x4 junction box
- Tamper resistant fasteners
- Frosted 1/4" high impact grade acrylic (non-matte finish on end cap)
- No VOC powder coat paint finish
- ETL listed for wet location

RELATIVE SCALE DRAWING

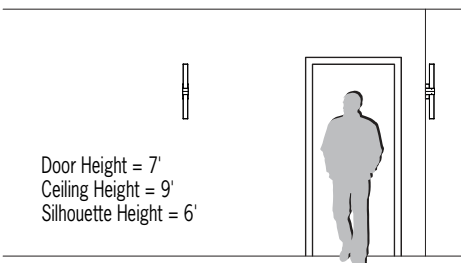

PHOTOMETRICS

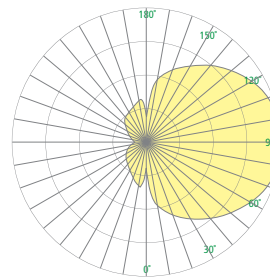

IP65



XPS



ADA Compliant



ETL Listed



5 Year Warranty

OW2400 SASS (cont.)

Rectilinear

Fill in shaded boxes using information listed below

OW2400		-	MVOLT		
MODEL	SOURCE ¹		VOLTAGE MVOLT	FINISH	OPTION(S) ²
	<ul style="list-style-type: none"> L30K L35K L40K 			See last page for finish order codes	<ul style="list-style-type: none"> JBC RMD XPS

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 90CRI, within 3-step MacAdam

SOURCE	CCT	Delivered Lumens	Power (Watts)
• L30K	3000K	520	13
L35K	3500K	520	13
• L40K	4000K	520	13

VOLTAGE


MVOLT	120-277V, 50/60 Hz
-------	--------------------

OPTIONS² (Multiple Selections Allowed)


⚠ Option availability may be interdependent with Other Options

JBC	Adaptor plate and decorative cover for 4x4 octagonal or square junction box. (When the JBC version is selected, the fixture depth is 4.25". The JBC version is not ADA.) Finish matches canopy and housing
RMD	Remote mounted power supply (required for mullion mount)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

REMOTE DRIVER (RMD OPTION) ENCLOSURE

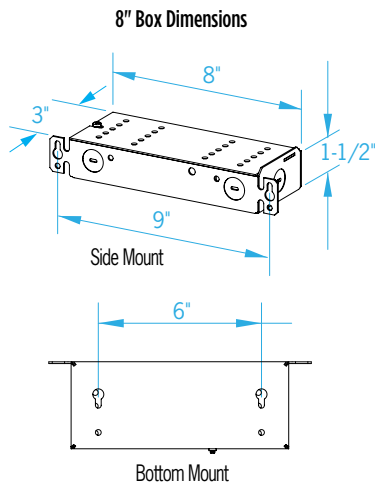

JUNCTION BOX COVER (JBC OPTION) MOUNTING DETAIL

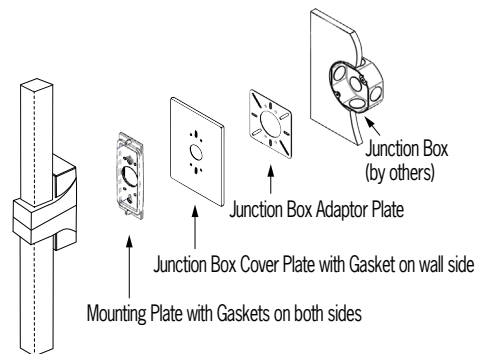

OW2400 SASS (cont.)

Rectilinear



SASS PRODUCT FAMILY

- OW2400 - Rectilinear
- OW2402 - Cylindrical

See [Visalighting.com/products/Sass](https://visalighting.com/products/Sass) for more information

SUGGESTED VARIATIONS

- 2700K
- Adaptive collar for column mounting

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red