

# OW2450 PLURAL™



[VisaLighting.com/products/Plural](http://VisaLighting.com/products/Plural)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




## DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

<b>W</b>	4-3/4" (121 mm)
<b>H</b>	11" (279 mm)
<b>D</b>	4-3/4" (121 mm)
<b>D w/ JBC option</b>	5" (127 mm)

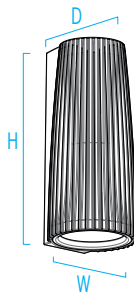


For mullion mounting: Minimum required mullion width is 2-7/8"


## FEATURES

- Integral (unless RMB option is selected) high power factor electronic power supply with MVOLT operation
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- Surface mount to 2x4 junction box or window mullion. Mullion mount requires RMD option and minimum 2-7/8" mullion
- Optional junction box cover (JBC) available for 4" octagonal or square junction box
- Tamper resistant fasteners
- Clear tempered glass lens cover
- No VOC powder coat paint finish
- ETL listed for wet location


## RELATIVE SCALE DRAWING

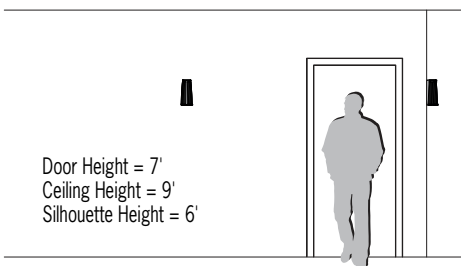

## PHOTOMETRICS

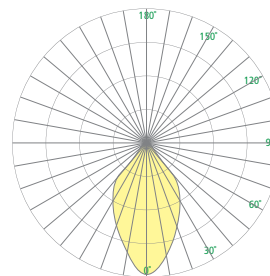

MED 56° beam

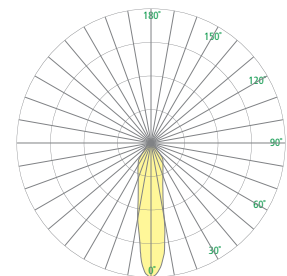

NRW 21° beam



IP65



XPS



ETL Listed



5 Year Warranty

# OW2450 PLURAL (cont.)



Fill in shaded boxes using information listed below

<b>OW2450</b>		<b>MVOLT</b>			
<b>MODEL</b>	<b>SOURCE<sup>1</sup></b> L30K L35K L40K	<b>VOLTAGE</b> MVOLT	<b>OPTICAL DISTRIBUTION<sup>2</sup></b> NRW MED	<b>FINISH</b>  See last page for finish order codes	<b>OPTION(S)<sup>3</sup></b> JBC RMD

**SOURCE<sup>1</sup>** (Select one)

Dimmable 0-10V to 1%, Minimum 90CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K	3000K	1200	15
L35K	3500K		
L40K	4000K		

**VOLTAGE**

<b>MVOLT</b>	120-277V, 50/60 Hz
--------------	--------------------

**LUMEN MAINTENANCE RATING**

L90 (reported)	>55,000 hrs
----------------	-------------

**OPTICAL DISTRIBUTION FOR DOWNLIGHT<sup>2</sup>** (Select one)


<b>MED</b>	56° BEAM
<b>NRW</b>	21° BEAM

**OPTION(S)<sup>3</sup>** (Multiple selections allowed)

**⚠ Option availability may be interdependent with Other Options**


<b>JBC</b>	Adaptor plate and decorative cover for 4" octagonal or square junction box. Finish matches canopy and housing
<b>RMD</b>	Remote mounted power supply (required for mullion mount)

**Path of Egress**

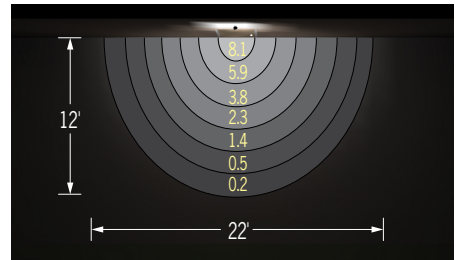

OW2450 Medium spread optics; Mounted at 10' AFF, .70 light loss factor

**Junction Box Cover (JBC option) Mounting Detail**

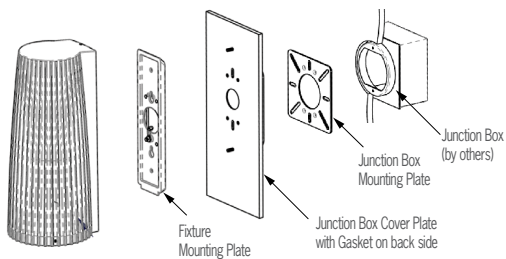

# OW2450 PLURAL (cont.)



## SUGGESTED VARIATION

- Custom colors

See [Visalighting.com/products/Plural](https://visalighting.com/products/Plural) for more information

## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
						
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
						
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VLBK</b> Velvet Black	<b>VNRD</b> Vineyard Red