


# CP6000 Sequence™ Mini

## Vertical Suspension


[VisaLighting.com/products/Sequence-Mini](https://VisaLighting.com/products/Sequence-Mini)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

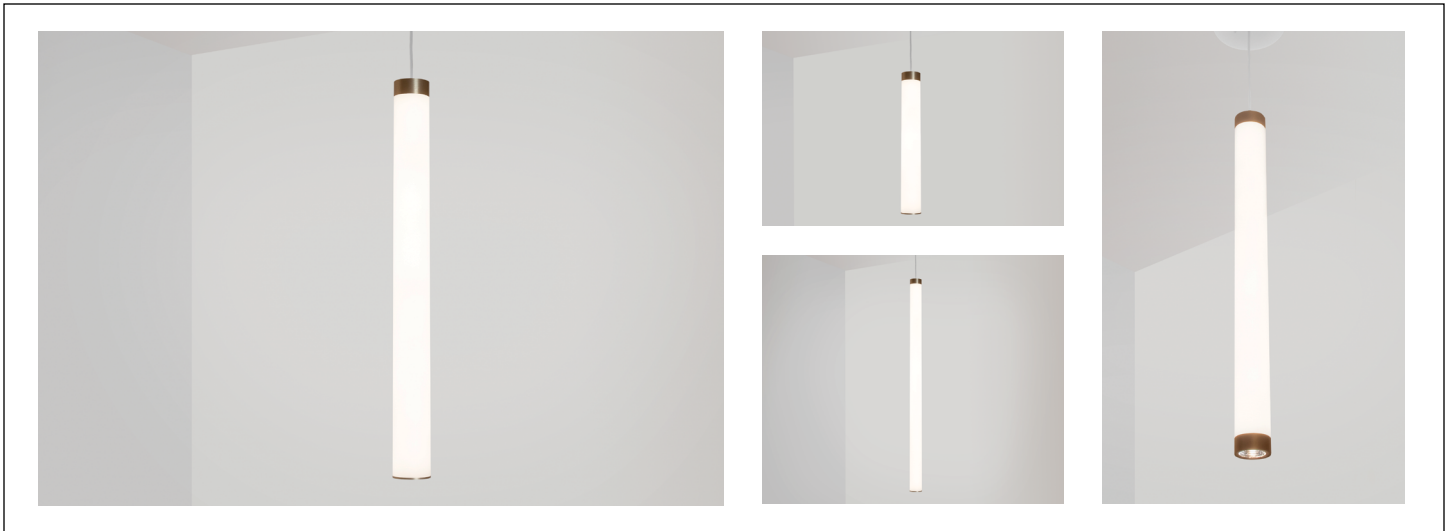

### DIMENSIONS<sup>10</sup>



### OAH MUST BE SPECIFIED

DIA = Diameter OAH = Overall Height X = Body Length WT = Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(192) indicates an overall fixture height of 192"

|         |              |                    |
|---------|--------------|--------------------|
| DIA     | 2-1/4"       | (57 mm)            |
| OAH     | 96"          | (2438 mm)          |
| MIN OAH | X + 3"       | (X + 76 mm)        |
| X       | 12" – 72"    | (305 mm – 1829 mm) |
| WT      | 1 lb – 6 lbs | (454 g – 2722 g)   |


### RELATIVE SCALE DRAWING

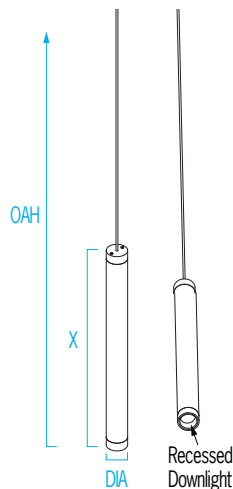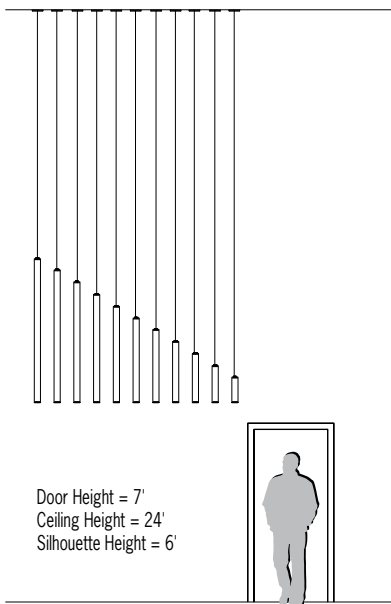


### FEATURES

- Varying lengths, from 12" to 72", in 6" increments
- Optional downlight, 0-10V dimmable (controls by others), with narrow, medium, or wide optical distribution
- Endcaps machined from raw 2.25" DIA Aluminum billet
- Remote Driver Enclosure (RMD) is available for all lengths. Round canopy is 5-1/4" diameter and 1/2" deep.
- Driver in canopy (SDC) is available for lengths 24" and longer. Round canopy is 6-3/8" diameter and 1-1/2" deep.
- Canopy for both (RMD) or (SDC) mounts over 4x4 junction box (by others) with provided hardware and is painted white
- Suspended via black, white, or grey cloth braided power cord. Overall height (OAH) can be field adjusted to a shorter length during installation
- Matte white acrylic body
- No VOC powder coat finish or low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications


### PHOTOMETRICS




Bodylight



Downlight Optic NRW 27° Beam



Downlight Optic MED 33° Beam



Downlight Optic WIDE 48° Beam



ETL Listed

5 Year Warranty

800-788-VISA

VisaLighting.com

Page 1

# CP6000 Sequence Mini (cont.)

## Vertical Suspension



Fill in shaded boxes using information listed below

### CP6000

| MODEL | LENGTH <sup>1</sup>  | BODYLIGHT <sup>2</sup> | OPTIONAL DOWNLIGHT <sup>3</sup> | OPTIONAL DOWNLIGHT OPTIC <sup>4</sup> | VOLTAGE <sup>5</sup> | OPTIONAL DIMMING CONTROL <sup>6</sup>   | FINISH                               | CORD COLOR <sup>7</sup> | DRIVER <sup>8</sup>  | OPTION <sup>9</sup> | OAH <sup>10</sup> |
|-------|--|------------------------|---------------------------------|---------------------------------------|----------------------|---|--------------------------------------|-------------------------|--|---------------------|-------------------|
|       | 12 48<br>18 54<br>24 60<br>30 66<br>36 72<br>42  | L30K<br>L35K<br>L40K   | LOW<br>HIGH                     | MED<br>NRW<br>WIDE                    | MVOLT<br>347V        | DALI  | See last page for finish order codes | BSC<br>WSC<br>GSC       | SDC<br>RMD   | DCC                 | See page 1        |
|       | Custom lengths available from 12" to 72" in length in 1" nominal increments; contact factory |                        |                                 | Required for downlight option         |                      | Dimmable 0-10V to 1% if option not selected. <b>DALI not available with SDC or 347V</b> |                                      |                         | SDC not available with 347V or DALI option; SDC not available on 12" and 18" lengths |                     |                   |

### BODYLIGHT SOURCE (Select one length<sup>1</sup> and one source<sup>2</sup>)

Minimum 80CRI, within 3-step MacAdam

| Bodylight Source <sup>2</sup> | L30K                    | L35K  | L40K  | Power (Watts)<br>(Body) |
|-------------------------------|-------------------------|-------|-------|-------------------------|
| CCT                           | 3000K                   | 3500K | 4000K |                         |
| Length <sup>1</sup>           | Delivered Lumens (Body) |       |       |                         |
| 12"                           | 650                     | 700   | 700   | 7                       |
| 18"                           | 1000                    | 1100  | 1100  | 10                      |
| 24"                           | 1400                    | 1500  | 1600  | 14                      |
| 30"                           | 1800                    | 1900  | 2000  | 17                      |
| 36"                           | 2200                    | 2300  | 2500  | 21                      |
| 42"                           | 2600                    | 2800  | 2900  | 24                      |
| 48"                           | 3000                    | 3200  | 3300  | 28                      |
| 54"                           | 3400                    | 3600  | 3800  | 31                      |
| 60"                           | 3800                    | 4000  | 4200  | 35                      |
| 66"                           | 4200                    | 4500  | 4700  | 39                      |
| 72"                           | 4600                    | 4900  | 5100  | 42                      |

Bodylight and downlight are separately switched and controlled/dimmed

### LUMEN MAINTENANCE RATING

|           |                |             |
|-----------|----------------|-------------|
| Bodylight | L80 (reported) | >72,000 hrs |
| Downlight | L80 (reported) | >55,000 hrs |


### OPTIONAL DOWNLIGHT<sup>3</sup> AND OPTIC<sup>4</sup>

Fixture bottom is solid if no downlight is specified. Downlight adds an extra 1" to overall length. CCT matches bodylight selection Minimum 80CRI, within 3-step MacAdam

|      | Delivered Lumens |      | Power (Watts) |
|------|------------------|------|---------------|
|      | L30K/L35K        | L40K |               |
| LOW  | 800              | 850  | 8             |
| HIGH | 1500             | 1600 | 17            |

| Downlight Optic |          |
|-----------------|----------|
| NRW             | 27° Beam |
| MED             | 33° Beam |
| WIDE            | 48° Beam |

### DIMENSIONS WITH DOWNLIGHT CP6000 – 24" EXAMPLE



Downlight adds an extra 1" to overall height (OAH)

### VOLTAGE<sup>5</sup> (Select one)

|       |  |
|-------|--|
| MVOLT | 120-277V, 50/60 Hz                                 |
| 347V  | 50/60 Hz<br>Not available with DALI or SDC options |

Options continued on Page 3

# CP6000 Sequence Mini (cont.)

## Vertical Suspension



### DIMMING CONTROL OPTION<sup>6</sup>

0-10V dimming to 1% is included unless DALI option is selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

|             |  |
|-------------|--|
| <b>DALI</b> | Dimming control capability (to 5%) via DALI 1.0 protocol (not available with 347V or SDC option) |
|-------------|--|

### CORD COLOR<sup>7</sup> (Select one)

|            |                                     |
|------------|-------------------------------------|
| <b>BSC</b> | Black linen braided over power cord |
| <b>WSC</b> | White linen braided over power cord |
| <b>GSC</b> | Gray linen braided over power cord  |




### DRIVER<sup>8</sup> (Select one)

▲ Availability may be interdependent with Voltage, Source or Other Options



|            |   |
|------------|---|
| <b>SDC</b> | Surface canopy with integral driver; canopy is painted white (not available with 347V or DALI option; not available on 12" and 18" lengths)     |
| <b>RMD</b> | Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC); canopy is painted white |

### DRIVER DETAIL

#### Remote Driver (RMD)




#### Surface Canopy with Integral Driver (SDC)

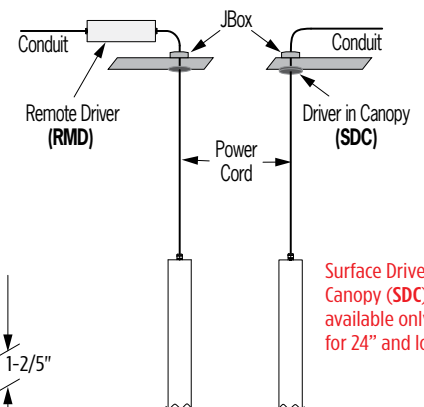


### REMOTE DRIVER (RMD) INFORMATION

8" RMD box is used for 24" to 72" lengths

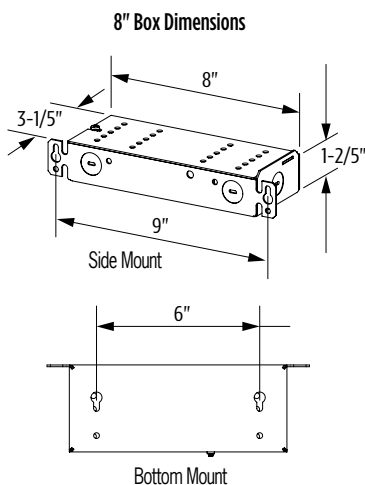

18" RMD box is used for any of these lengths: 12" & 18" lengths, DALI dimming, 347V

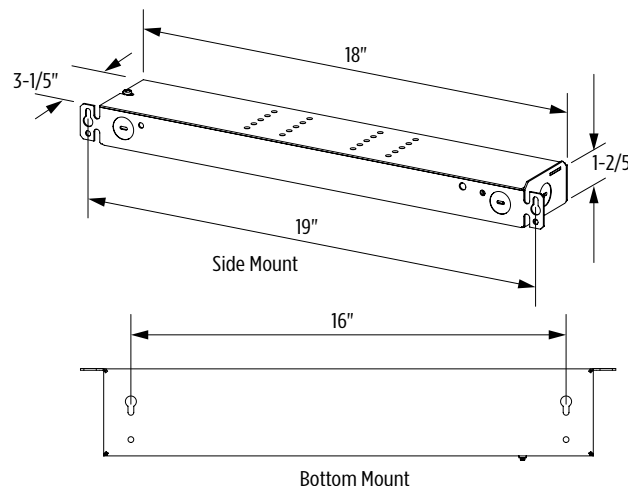

Remote driver boxes have knockouts for conduit connections

# CP6000 Sequence Mini (cont.)

## Vertical Suspension



### OPTION<sup>9</sup>

▲ Option availability may be interdependent with Other Options

|     |   |
|-----|---|
| DCC | Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations) |
|-----|---|

Maximum Recommended Remote Wiring Distance from RMD to fixture canopy

- 12GA 190 ft
- 14GA 120 ft
- 16GA 75 ft
- 18GA 45 ft
- 20GA 30 ft

### SEQUENCE PRODUCT FAMILY

|                              |  |                              |  |
|------------------------------|--|------------------------------|--|
| Wall Units                   | <ul style="list-style-type: none"> <li>• CB5201 — 34 In Indoor Wall</li> <li>• CB5203 — 45 In Indoor Wall</li> </ul>   |                              | <ul style="list-style-type: none"> <li>• OP2252 — 8 In x 2 Ft Canopy</li> <li>• OP2253 — 8 In x 3 Ft Canopy</li> </ul>   |
| 4" Diameter Pendants         | <ul style="list-style-type: none"> <li>• CP2020 — 4 In x 2 Ft</li> <li>• CP2022 — 4 In x 3 Ft</li> <li>• CP2024 — 4 In x 4 Ft</li> <li>• CP2026 — 4 In x 5 Ft</li> <li>• CP2028 — 4 In x 6 Ft</li> <li>• CP2030 — 4 In x 8 Ft</li> </ul>   | Outdoor 8" Diameter Pendants | <ul style="list-style-type: none"> <li>• OP2254 — 8 In x 4 Ft Canopy</li> <li>• OP2262 — 8 In x 2 Ft Catenary</li> <li>• OP2263 — 8 In x 3 Ft Catenary</li> <li>• OP2264 — 8 In x 4 Ft Catenary</li> </ul>                               |
|                              |  | Outdoor Wall Units           | <ul style="list-style-type: none"> <li>• OW5201 — 34 In Outdoor Wall</li> <li>• OW5203 — 45 In Outdoor Wall</li> </ul>   |
| 8" Diameter Pendants         | <ul style="list-style-type: none"> <li>• CP2036 — 8 In x 2 Ft</li> <li>• CP2038 — 8 In x 3 Ft</li> <li>• CP2040 — 8 In x 4 Ft</li> <li>• CP2042 — 8 In x 5 Ft</li> <li>• CP2044 — 8 In x 6 Ft</li> <li>• CP2046 — 8 In x 8 Ft</li> </ul>   | 4" Indoor Sequence Square    | <ul style="list-style-type: none"> <li>• CP5820 — 4 in x 2 ft</li> <li>• CP5822 — 4 in x 3 ft</li> <li>• CP5824 — 4 in x 4 ft</li> <li>• CP5826 — 4 in x 5 ft</li> <li>• CP5828 — 4 in x 6 ft</li> <li>• CP5830 — 4 in x 8 ft</li> </ul> |
| 12" Diameter Pendants        | <ul style="list-style-type: none"> <li>• CP2052 — 12 In x 2 Ft</li> <li>• CP2054 — 12 In x 3 Ft</li> <li>• CP2056 — 12 In x 4 Ft</li> <li>• CP2058 — 12 In x 5 Ft</li> <li>• CP2060 — 12 In x 6 Ft</li> <li>• CP2062 — 12 In x 8 Ft</li> </ul>   | 8" Indoor Sequence Square    | <ul style="list-style-type: none"> <li>• CP5836 — 8 in x 2 ft</li> <li>• CP5838 — 8 in x 3 ft</li> <li>• CP5840 — 8 in x 4 ft</li> <li>• CP5842 — 8 in x 5 ft</li> <li>• CP5844 — 8 in x 6 ft</li> <li>• CP5846 — 8 in x 8 ft</li> </ul> |
| Outdoor 4" Diameter Pendants | <ul style="list-style-type: none"> <li>• OP2222 — 4 In x 3 Ft Canopy</li> <li>• OP2223 — 4 In x 4 Ft Canopy</li> <li>• OP2224 — 4 In x 5 Ft Canopy</li> <li>• OP2232 — 4 In x 3 Ft Catenary</li> <li>• OP2233 — 4 In x 4 Ft Catenary</li> <li>• OP2234 — 4 In x 5 Ft Catenary</li> </ul> | Vertical Sequence Mini       | <ul style="list-style-type: none"> <li>• CP6000 — 2 in; various lengths</li> </ul>   |
|                              |  | Horizontal Sequence Mini     | <ul style="list-style-type: none"> <li>• CP6002 — 2 in; various lengths</li> </ul>   |

### SUGGESTED VARIATIONS

- Custom lengths/lumen outputs
- Alternative downlight bezel and end cap color
- Multi-fixture clusters via custom multi-point canopies
- Angled mounting via additional hang cable

See [Visalighting.com/Sequence](https://visalighting.com/Sequence), [Visalighting.com/Sequence-Square](https://visalighting.com/Sequence-Square) and [Visalighting.com/Sequence-Mini](https://visalighting.com/Sequence-Mini) for more information

# CP6000 Sequence Mini (cont.)

## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

### Powder Coat Paint Finishes (Standard)

|   |  |  |  |   |  |  |
|---|--|--|--|---|--|--|
|   |   |   |   |   |   |   |
| <b>AGGY</b> Agate Grey  | <b>ALGN</b> Alpine Green   | <b>BJBG</b> Baja Beige   | <b>BMAT</b> Bronze Matte   | <b>BRNZ</b> Bronze  | <b>BSIL</b> Blade Silver   | <b>CVBL</b> Cove Blue  |
|   |   |   |   |   |   |   |
| <b>DEOR</b> Deoro Gold  | <b>GLWT</b> Glacier White  | <b>GSIL</b> Graphite Silver  | <b>HRGR</b> Harbor Grey  | <b>JTBK</b> Jet Black   | <b>OCBL</b> Ocean Blue   | <b>SHGR</b> Shoreline Grey   |
|  |  |  |  |  |  |  |
| <b>SBGN</b> Sagebrush Green   | <b>SLGR</b> Slate Grey   | <b>SSTP</b> Sierra Taupe   | <b>TRCN</b> Terracotta Canyon  | <b>TRWT</b> Traffic White   | <b>VBLK</b> Velvet Black   | <b>VNRD</b> Vineyard Red   |

### Alternative Metal Finishes (Premium)

|  |   |   |   |
|--|---|---|---|
|  |  |  |  |
| <b>BBA</b> Brushed Brass Alternative   | <b>BCA</b> Brushed Chrome Alternative   | <b>BUA</b> Brushed Copper Alternative   | <b>BZA</b> Brushed Bronze Alternative   |
|  |  |  |  |
| <b>OBA</b> Oil-Rubbed Bronze Alternative   | <b>PRA</b> Pewter Alternative   | <b>RBA</b> Rustic Brass Alternative   | <b>SNA</b> Satin Nickel Alternative   |

### Metal Finish (Premium)

|   |
|---|
|  |
| <b>BA</b> Brushed Aluminum  |