

CM1978-W SYMMETRY™

Behavioral Health – 45" General Use



VisaLighting.com/products/Symmetry

Type: _____ Project: _____ Location: _____




DIMENSIONS

DIA = Diameter RD = Recessed Depth RW = Recessed Width


DIA 45-11/16" (1160 mm)

RD 6" (152 mm)

RW 47-3/4" (1213 mm)

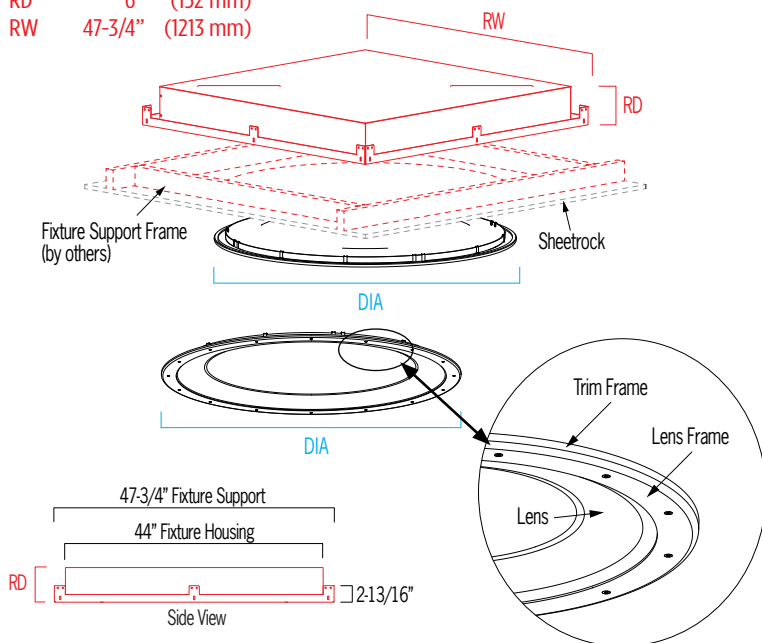


RELATIVE SCALE DRAWING

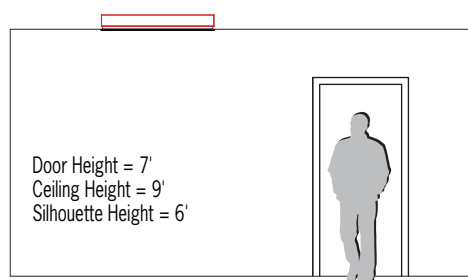

FEATURES

- Integral driver located within the housing and accessible from below the ceiling
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Remote emergency driver
- High Abuse lens and frame features 3/16" thick, high impact clear polycarbonate secured with tamper resistant fasteners; tested to >100 joules impact
- Ligature resistant; sheetrock/drywall installation (see installation instructions), not suited for grid ceiling installation
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint finish
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS



CM1978-W SYMMETRY (cont.)

Behavioral Health – 45” General Use



Fill in shaded boxes using information listed below

CM1978-W	- MVOLT					
MODEL	SOURCE ¹	SOURCE OPTION ²	VOLTAGE MVOLT	DIMMING CONTROL ³	LENS FRAME FINISH	OPTION ⁴ REM
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI Minimum 80CRI is standard if 90CRI option is not selected		DALI ZB	See last page for finish order codes	

SOURCE¹ (Select one)

Dimmable 0-10V to 1%
Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	4600	49
L30K(L)	3000K	2700	29
L35K(H)	3500K	4700	49
L35K(L)	3500K	2800	29
L40K(H)	4000K	4800	49
L40K(L)	4000K	2800	29

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

SOURCE OPTION²

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)
-------	----------------------------------------------------------------------------------------------

DIMMING CONTROL OPTION³

▲ Option availability may be interdependent with Voltage, Source or Other Options

Dimmable 0-10V to 1% is standard if option is not selected

DALI	Control via DALI protocol, dimming to minimum 1%
ZB	Wireless control, ZigBee H.A. v1.2 (Osram CLM-DIM)

OPTION⁴

REM	Remote emergency driver (ambient), 10W output for 90 minutes Locate outside of patient room for ease of service
-----	--------------------------------------------------------------------------------------------------------------------

CM1978-W SYMMETRY (cont.)

Behavioral Health – 45” General Use



SYMMETRY PRODUCT FAMILY

Behavioral Health – Overbed	CM1976-W – 45” CM1986-W – 23”
Behavioral Health – General Use	CM1978-W – 45” CM1988-W – 23”
Behavioral Health – Tunable	CM1978-T – 45” CM1982-T – 23”
Overbed	CM1970-W – 45” CM1980-W – 23”
General Use	CM1972-W – 45” CM1982-W – 23”
Tunable	CM1972-T – 45” CM1988-T – 23”

See [Visalighting.com/Products/Symmetry](https://visalighting.com/Products/Symmetry) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red