


CM2082-T JASPER

2'x2' Tunable



VisaLighting.com/products/Jasper

Type: _____ Project: _____ Location: _____

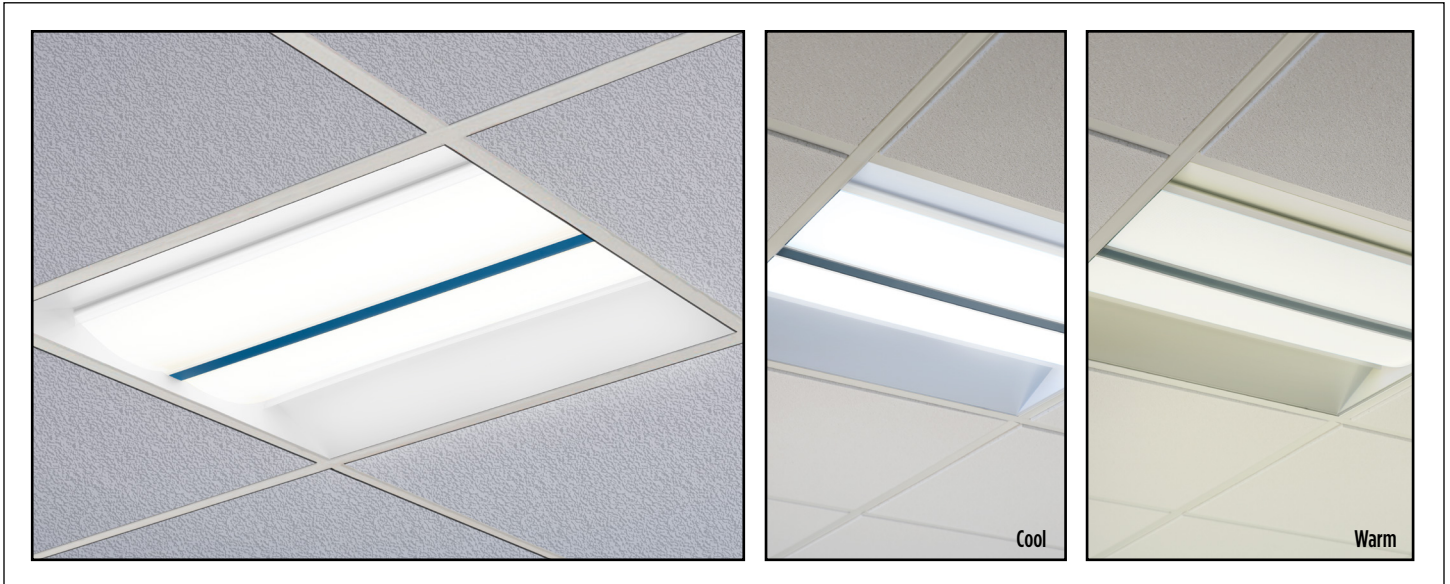


DIMENSIONS

W = Width L = Length RD = Recessed Depth

L 23-3/4" (603 mm)

W 23-3/4" (603 mm)


RD 3" (76 mm)

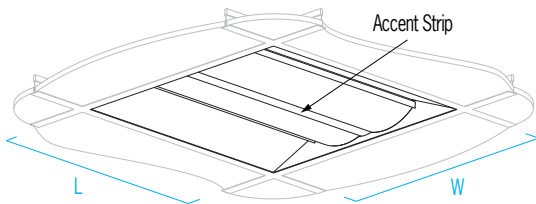


FEATURES

- Integral driver
- Multiple levels of lumen output
- Low plenum depth enables use in “busy” recessed plenums or retrofit projects
- Mounts to standard 15/16”, 9/16”, or screw-slot grid ceiling systems
- Integral T-bar retaining clips
- Integral mounting points for suspension cables (by others) to building structure
- Optional NEC Article 410 compliant “earthquake clips” (EQC option)
- Optional flange kit for mounting to drywall ceilings (SRI option)
- Extruded, frosted acrylic lens with diffusing optical film
- Die-formed enclosure
- Fabricated aluminum accent strip available in Non VOC powder coat, brushed aluminum, and eight exclusive, eco-friendly alternative finishes
- Not suitable for insulation contact
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING

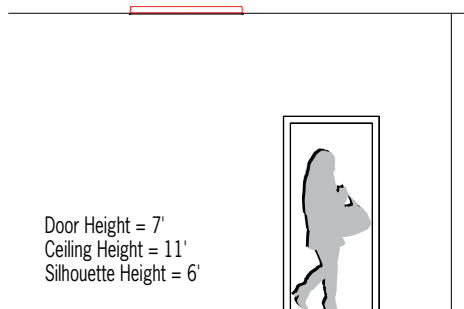

PHOTOMETRICS

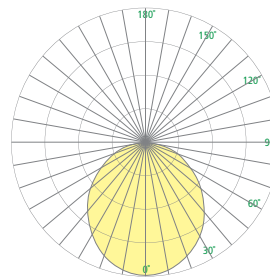

CM2082-T JASPER (cont.)

2'x2' Tunable



Fill in shaded boxes using information listed below

CM2082-T

MODEL	SOURCE¹ TUN2(VH) TUN2(H) TUN2(L)	VOLTAGE² MVOLT 347V	ACCENT STRIP FINISH See last page for finish order codes	OPTION(S)⁴ DCC EQC SRI WHIP
--------------	---	---	---	---

SOURCE¹ (Select one)

Dimmable 0-10V to 10%, Minimum 90CRI, within 3-step MacAdam (2700K-6500K)

Source	CCT Range	Delivered Lumens	Power (Watts)
TUN2(VH)	2700K - 6500K	3700	33
TUN2(H)		3000	26
TUN2(L)		2300	21

Lumens data shown is at 3500K. Lumens can vary slightly as CCT changes

VOLTAGE² (Select one)

MVOLT	120-277V, 50/60 Hz
347V	50/60 Hz (Not available with IEM option)

LUMEN MAINTENANCE RATING

L80 (reported)	>50,000 hrs
-----------------------	-------------

Reported Lifetime per IES TM-21

OPTION(S)⁴ (Multiple selections allowed)

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
EQC	"Earthquake clip" t-bar mounting brackets (2 provided)
SRI	Drywall ceiling mounting kit
WHIP	Pre-wired 6-foot long 18AWG flex conduit whip, conductors per fixture configuration (contact factory for details)

CM2082-T JASPER (cont.)

2'x2' Tunable



JASPER PRODUCT FAMILY

- CM2082-W – 2'x2' White
- CM2082-T – 2'x2' Tunable
- CM2084-W – 2'x4' Tunable
- CM2084-T – 2'x4' Tunable
- CM2094 – 2'x4' Overbed

SUGGESTED VARIATION

- Custom colors

See [Visalighting.com/Products/Jasper](https://visalighting.com/Products/Jasper) for more information

CM2082-T JASPER (cont.)

2'x2' Tunable



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum