

CP4430 ROCKET™

16" Diameter Direct Pendant


VisaLighting.com/products/Rocket


Type: _____ Project: _____ Location: _____



DIMENSIONS³

DIA = Diameter X = Body Height OAH = Standard Overall Height WT = Weight


DIA 16" (406 mm)
X 12" (305 mm)
OAH 120" (3048 mm)
WT 7 lbs (3175 gm)

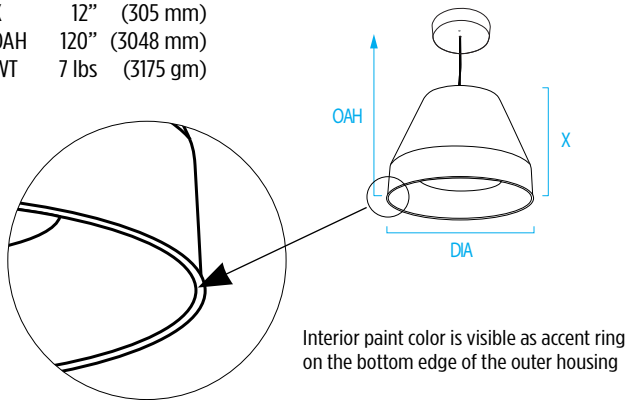


FEATURES

- Flat white acrylic lens and contoured bottom reflector
- High or low lumen output options
- Integral driver in canopy
- Optional 90+ CRI (2700K sources are 90+ CRI standard)
- Slim white power cord and aircraft cable suspension
- Canopy is painted white
- Mounts over standard 4x4 or octagonal j-box
- Hand spun aluminum dome and bottom reflector
- Non-VOC powder-coat finishes on outer dome and bottom reflector
- ETL listed for damp locations. Not suitable for exterior applications

RELATIVE SCALE DRAWING

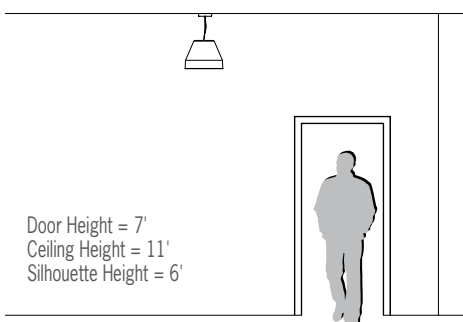

PHOTOMETRICS

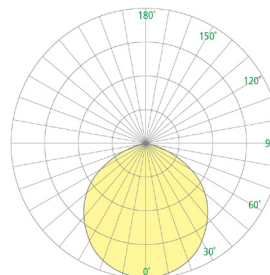

CP4430 ROCKET (cont.)

16" Diameter Direct Pendant



Fill in shaded boxes using information listed below

CP4430				MVOLT			
MODEL	SOURCE ¹	SOURCE OPTION ²		VOLTAGE	OUTER FINISH	REFLECTOR FINISH	OAH ³
	L27K(H) L27K(L) L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI Minimum 80CRI is standard if option is not selected Minimum 90CRI is standard with 2700K Sources		MVOLT	See last page for finish order codes Canopy painted white		See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens**	Power (Watts)
L27K(H)*	2700K	2500	27
L27K(L)*	2700K	1700	17
L30K(H)	3000K	2600	27
L30K(L)	3000K	1800	17
L35K(H)	3500K	2700	27
L35K(L)	3500K	1850	17
L40K(H)	4000K	2800	27
L40K(L)	4000K	1900	17

*L27K sources are 90CRI standard

**Delivered lumen output tested with white reflector finish
Dark reflector finish reduces lumen output up to 10%

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L80 (reported)	>60,000 hrs
Reported Lifetime per IES TM-21	

SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%); option available for L30K, L35K, and L40K sources (L27K sources: 90CRI is standard)
-------	--

CP4430 ROCKET (cont.)

16" Diameter Direct Pendant



SUGGESTED VARIATIONS

- Stem suspension
- Remote driver
- Custom colors

See [Visalighting.com/products/Rocket](https://visalighting.com/products/Rocket) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red