


OW2486 PASSAGE™

Junction Box Mount with Integral Power Supply



[Visalighting.com/products/Passage](https://visalighting.com/products/Passage)

Type: _____ Project: _____ Location: _____

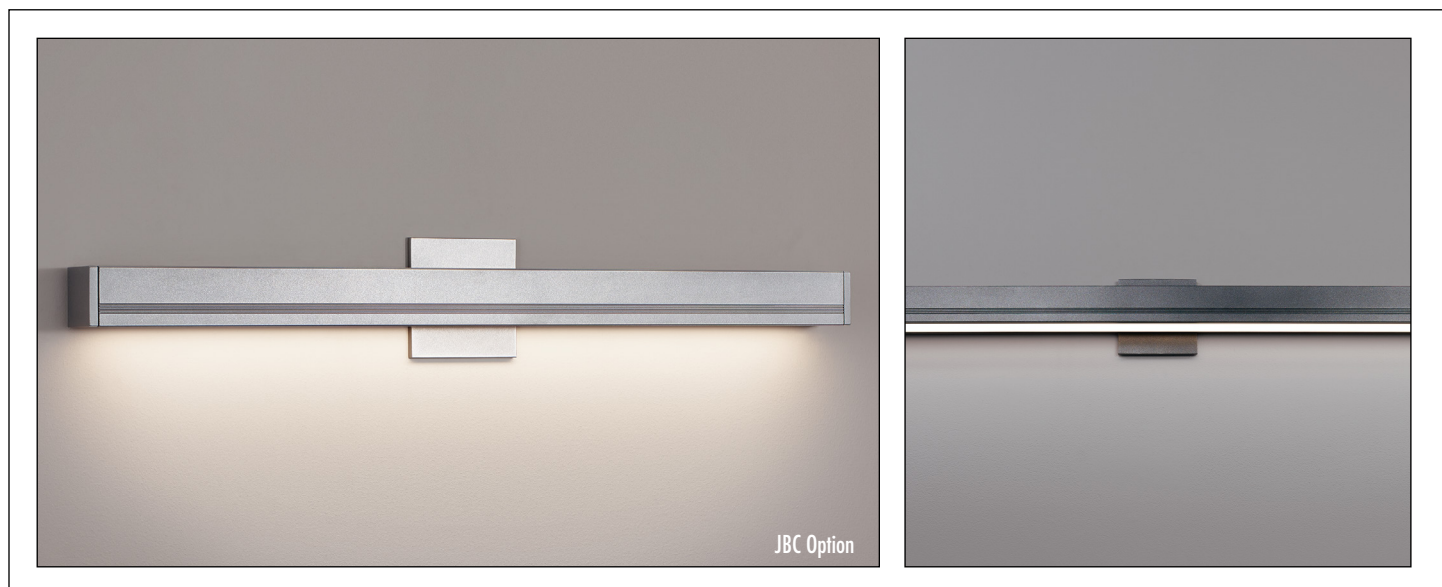


DIMENSIONS

Depth is measured from wall to front of fixture

L = Length H = Height D = Depth

L 72" (1829 mm)
H 2-1/2" (64 mm)
D 2-1/2" (64 mm)

Standard Backplate includes 5" wide x 3" high
Junction Box Cover for 2x4 junction box

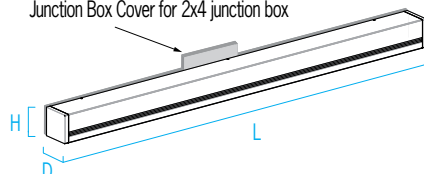


Use JBC option for 4x4 octagonal or rectilinear junction box


FEATURES

- High or low lumen output
- Luminous or Forward Throw output
- Modular design for replacement of LED source or driver
- Integral high power factor electronic power supply
- Optional dual circuit switching
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- Surface mount to 2x4 junction box. Optional junction box cover (JBC) available for 4x4 junction box
- Tamper resistant fasteners
- Polycarbonate diffuser
- No VOC powder coat paint finish; metal based sublimated wood look finish
- ETL Listed for wet location mounting 4' above grade


RELATIVE SCALE DRAWING

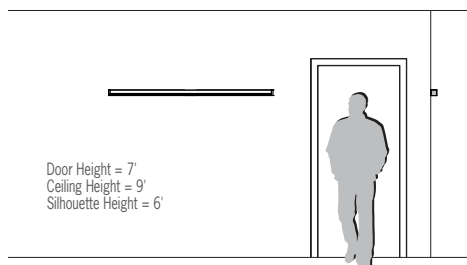

PHOTOMETRICS

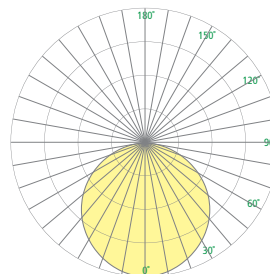

LUM (Luminous Lens)

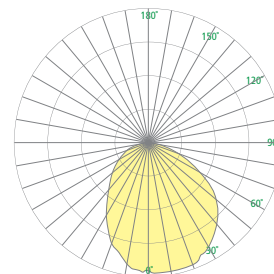

FT (Forward Throw Optic)



IP65



ADA Compliant



ETL Listed



5 Year Warranty

OW2486 PASSAGE (cont.)

Junction Box Mount with Integral Power Supply

Fill in shaded boxes using information listed below

OW2486		MVOLT			
MODEL	SOURCE ¹	VOLTAGE MVOLT	OPTIC ²	FINISH	OPTION ³
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)		LUM FT	See last page for finish order codes	DS NOJBC JBC2 JBC4

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 82CRI, within 3-step MacAdam

Source	CCT	Delivered Forward Throw Lumens	Delivered Luminous Lumens	Power (Watts)
L30K(H)	3000K	2700	1900	40
L30K(L)	3000K	900	650	14
L35K(H)	3500K	2700	1900	40
L35K(L)	3500K	900	650	14
L40K(H)	4000K	2700	1900	40
L40K(L)	4000K	900	650	14

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OPTIC OPTION² (Select one)


LUM	Luminous Lens
FT	Forward Throw Optic

OPTION(S)³ (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options


DS	Dual circuit switching (includes 2 drivers). Lumen output and wattage is split in half for each circuit
NOJBC	Mounting plate used when not mounting over standard junction box
JBC2	Adaptor plate and decorative cover for 2x4 octagonal or square junction box. Finish matches canopy and housing
JBC4	Adaptor plate and decorative cover for 4x4 octagonal or square junction box. Finish matches canopy and housing

PATH OF EGRESS - LUMINOUS LENS

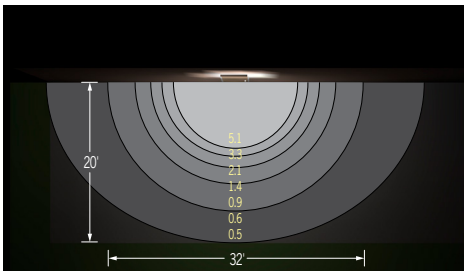

OW2486 -H Downlight, Mounted at 10' AFF, .70 light loss factor used


PATH OF EGRESS - FORWARD THROW

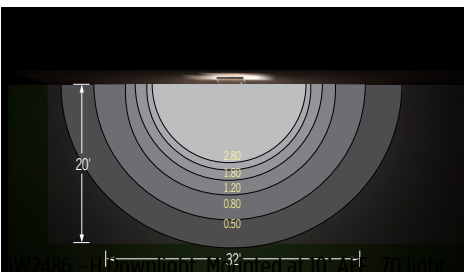

loss factor used

JUNCTION BOX COVER (JBC option) MOUNTING DETAIL

Backplate includes 5" wide x 6" high Junction Box Cover for 4x4 junction box

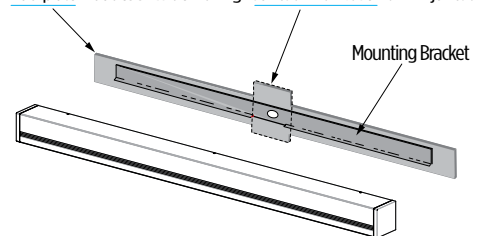

OW2486 PASSAGE (cont.)

Junction Box Mount with Integral Power Supply



PASSAGE PRODUCT FAMILY

- OW2480 – 37” – Mullion Mount with Remote Power Supply
- OW2482 – 37” – Junction Box Mount with Integral Power Supply
- OW2484 – 72” – Mullion Mount with Remote Power Supply
- OW2486 – 72” – Junction Box Mount with Integral Power Supply

SUGGESTED VARIATIONS

- Custom colors

See [Visalighting.com/products/Passage](https://visalighting.com/products/Passage) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLK Velvet Black	VNRD Vineyard Red