

CP3980 OMNIENCE™

26" Diameter - Stem



[Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience)

Type: _____ Project: _____ Location: _____




DIMENSIONS⁴

⚠️ OAH must be specified


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.
Example - OAH(24) indicates an overall fixture height of 24".

W = Width X = Body Height OAH = Standard Overall Height

W 26" (660 mm)
OAH 24" (610 mm)
X 6-3/4" (171 mm)

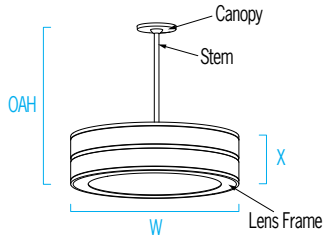


RELATIVE SCALE DRAWING

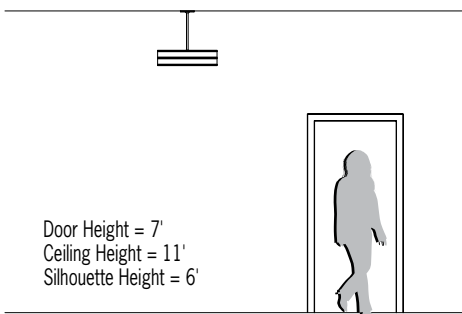

FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Upper perforations provide a luminous glow to reduce ceiling contrast if UPLT option is selected
- Mounts through 4" octagonal 2-1/8" deep electrical junction box (by others) with provided hardware for ceiling slopes up to 45° from horizontal
- Rolled extruded aluminum housing
- 1/8" thick diffuser with matte finish
 - UV stable
- Optional specialty diffuser materials available, including Vara Kamin's Impressions of Light® images which are replicated from Vara Kamin's original works of art
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

PHOTOMETRICS

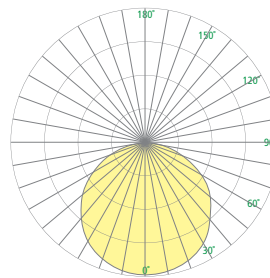

XPS



ETL Listed



5 Year Warranty

CP3980 OMNIENCE (cont.)

26" Diameter - Stem



Fill in shaded boxes using information listed below

CP3980		MVOLT				
MODEL	SOURCE ¹	VOLTAGE MVOLT	FINISH	DIFFUSER ² OPTION	OPTION(S) ³	OAH ⁴
	<ul style="list-style-type: none"> L30K L35K L40K 		See last page for finish order codes	<ul style="list-style-type: none"> IRP VKMD VKMM VKPG VKSS 	<ul style="list-style-type: none"> UPLT XPS 	See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 83CRI within 3-step MacAdam

Sources	CCT	Delivered Lumens	Power (Watts)
● L30K	3000K	9300	110
L35K	3500K	9300	110
● L40K	4000K	9600	110

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

DIFFUSER OPTIONS²

Diffuser is matte white acrylic if no option is selected

IRP	Impact resistant polycarbonate lens	
● VKMD	Vara Kamin's Moon Drops [®]	
● VKMM	Vara Kamin's Morning Melody [®]	
● VKPG	Vara Kamin's Priscilla's Garden [®]	
● VKSS	Vara Kamin's Summer of Sundays [®]	Vara Kamin options have been color-corrected to 4000K CCT and are available only with L40K source.

OPTIONS³ (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

UPLT	Lensed aperture in housing produces 3.8% uplight
XPS	Express 10 day shipping. Items marked with a bullet (●) are not available with XPS

CP3980 OMNIENCE (cont.)

26" Diameter - Stem



OMNIENCE PRODUCT FAMILY

Aircraft Cable	26" Diameter	• CP3970
	34" Diameter	• CP3975
	48" Diameter	• CP3995
Stem	26" Diameter	• CP3980
	34" Diameter	• CP3985
	48" Diameter	• CP3990
Ceiling Mount	26" Diameter	• CM1830

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red