

CP3990 OMNIENCE™

48" Diameter - Stem



[Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience)

Type: _____ Project: _____ Location: _____




DIMENSIONS⁴ **STRUCTURAL BLOCKING REQUIRED (DETAIL PAGE 2)** **FEATURES**

⚠ OAH must be specified
 OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.
 Example - OAH(42) indicates an overall fixture height of 42".


W = Width X = Body Height OAH = Standard Overall Height

W	48"	(1219 mm)
OAH	42"	(1066 mm)
X	6-3/4"	(171 mm)

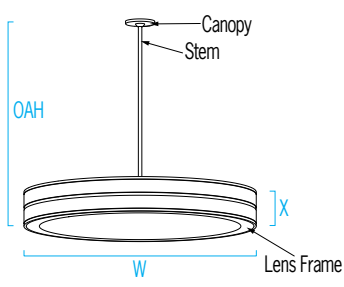


- Integral driver
- Modular design for replacement of LED source and driver
- Upper perforations provide a luminous glow to reduce ceiling contrast if UPLT option is selected
- Mounts through 4" octagonal 2-1/8" deep electrical junction box (by others) with provided hardware for ceiling slopes up to 45° from horizontal
- Rolled extruded aluminum housing
- 1/8" thick diffuser with matte finish
 - UV stable
- Optional specialty diffuser materials available, including Vara Kamin's Impressions of Light® images which are replicated from Vara Kamin's original works of art
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

RELATIVE SCALE DRAWING

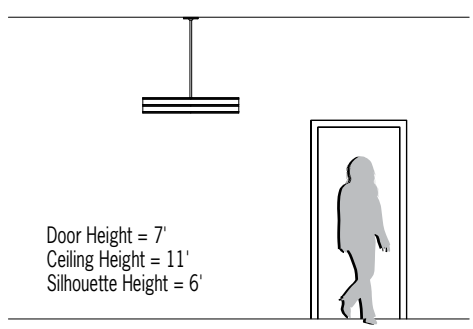

PHOTOMETRICS

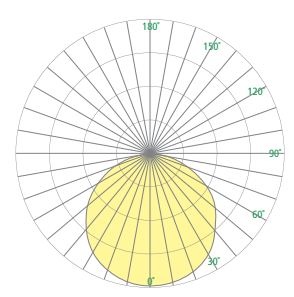

CP3990 OMNIENCE (cont.)

48" Diameter - Stem

Fill in shaded boxes using information listed below

CP3990	-		MVOLT			
MODEL	SOURCE¹ • L30K L35K • L40K	VOLTAGE MVOLT	FINISH See last page for finish order codes	DIFFUSER² OPTION IRP • VKMD • VKMM • VKPG • VKSS	OPTION(S)³ UPLT XPS	OAH⁴ See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 83CRI within 3-step MacAdam

Sources	CCT	Delivered Lumens	Power (Watts)
• L30K	3000K	13400	157
L35K	3500K	13400	157
• L40K	4000K	13800	157

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

DIFFUSER OPTIONS²

Diffuser is matte white acrylic if no option is selected


IRP	Impact resistant polycarbonate lens	
• VKMD	Vara Kamin's Moon Drops [®]	
• VKMM	Vara Kamin's Morning Melody [®]	
• VKPG	Vara Kamin's Priscilla's Garden [®]	
• VKSS	Vara Kamin's Summer of Sundays [®]	Vara Kamin options have been color-corrected to 4000K CCT and are available only with L40K source.

OPTIONS³ (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

UPLT	Lensed aperture in housing produces 3.8% uplight
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

STRUCTURAL BLOCKING DETAIL

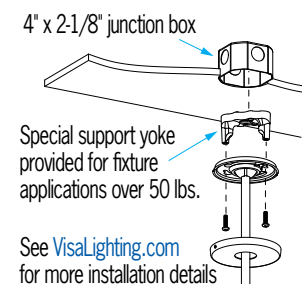

CP3990 OMNIENCE (cont.)

48" Diameter - Stem



OMNIENCE PRODUCT FAMILY

Aircraft Cable	26" Diameter	• CP3970
	34" Diameter	• CP3975
	48" Diameter	• CP3995
Stem	26" Diameter	• CP3980
	34" Diameter	• CP3985
	48" Diameter	• CP3990
Ceiling Mount	26" Diameter	• CM1830

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red