


CP3995 OMNIENCE™

48" Diameter - Aircraft Cable


[Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience)

Type: _____ Project: _____ Location: _____

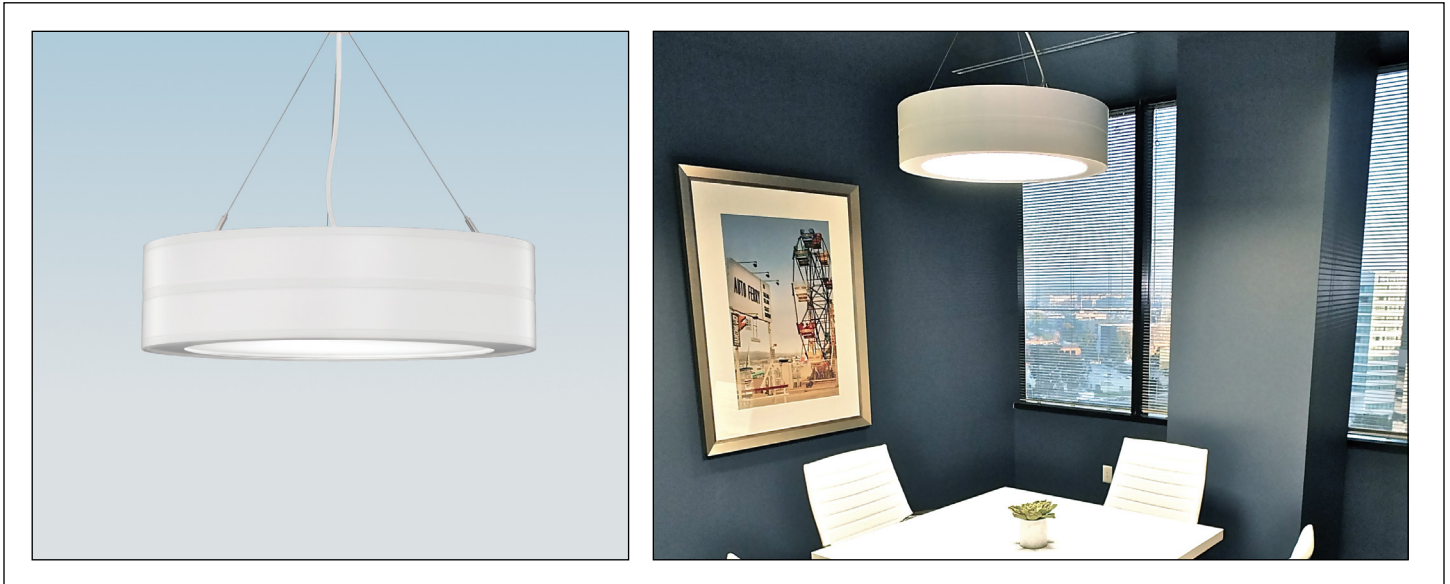

DIMENSIONS⁴


STRUCTURAL BLOCKING REQUIRED (DETAIL PAGE 2)

⚠️ OAH must be specified


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.
 Example - OAH (42) indicates an overall fixture height of 42". MP is the distance (in inches) from the bottom of the fixture to the bottom of the Stem Accent Junction.

W = Width X = Body Height OAH = Standard Overall Height MP = Stem Midpoint

W	48"	(1219 mm)
OAH	42"	(1066 mm)
X	6-3/4"	(171 mm)
MP	36-1/2"	(978 mm)

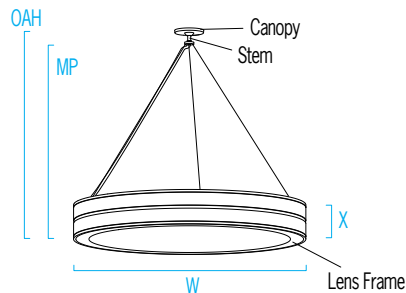


RELATIVE SCALE DRAWING

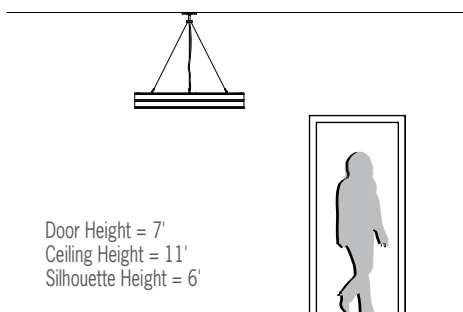

FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Upper perforations provide a luminous glow to reduce ceiling contrast if UPLT option is selected
- Mounts through 4" octagonal 2-1/8" deep electrical junction box (by others) to structural blocking (by others) with provided hardware for ceiling slopes up to 45° from horizontal
- Rolled extruded aluminum housing
- 1/8" thick diffuser with matte finish
 - UV stable
- Optional specialty diffuser materials available, including Vara Kamin's Impressions of Light® images which are replicated from Vara Kamin's original works of art
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

PHOTOMETRICS

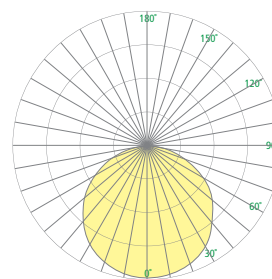

XPS



ETL Listed



5 Year Warranty

CP3995 OMNIENCE (cont.)

48" Diameter - Aircraft Cable



Fill in shaded boxes using information listed below

CP3995		-		MVOLT								
MODEL		SOURCE¹		VOLTAGE		FINISH		DIFFUSER²		OPTION(S)³		OAH⁴
		<ul style="list-style-type: none"> L30K L35K L40K 				See last page for finish order codes		OPTION IRP • VKMD • VKMM • VKPG • VKSS		UPLT XPS		See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 83CRI within 3-step MacAdam

Sources	CCT	Delivered Lumens	Power (Watts)
• L30K	3000K	13400	157
L35K	3500K	13400	157
• L40K	4000K	13800	157

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

DIFFUSER OPTIONS²

Diffuser is matte white acrylic if no option is selected


IRP	Impact resistant polycarbonate lens				
• VKMD	Vara Kamin's Moon Drops [®]	VKMD	VKMM	VKPG	VKSS
• VKMM	Vara Kamin's Morning Melody [®]				
• VKPG	Vara Kamin's Priscilla's Garden [®]	Vara Kamin options have been color-corrected to 4000K CCT and are available only with L40K source.			
• VKSS	Vara Kamin's Summer of Sundays [®]				

OPTIONS³ (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

UPLT	Lensed aperture in housing produces 3.8% uplight
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

STRUCTURAL BLOCKING DETAIL

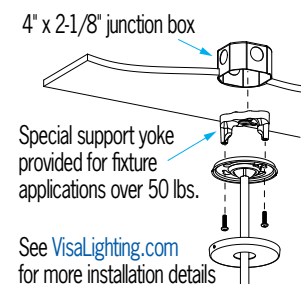

CP3995 OMNIENCE (cont.)

48" Diameter - Aircraft Cable



OMNIENCE PRODUCT FAMILY

Aircraft Cable	26" Diameter	• CP3970
	34" Diameter	• CP3975
	48" Diameter	• CP3995
Stem	26" Diameter	• CP3980
	34" Diameter	• CP3985
	48" Diameter	• CP3990
Ceiling Mount	26" Diameter	• CM1830

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red