

CP6900 MUSe™



VisaLighting.com/products/Muse

Type: _____ Project: _____ Location: _____

DIMENSIONS⁵

X = Body Height DIA = Diameter OAH = Standard Overall Height WT = Weight


X	7-1/8"	(182 mm)
DIA	7-7/8"	(201 mm)
OAH	36"	(914 mm)
WT	2 lbs	(907 gm)

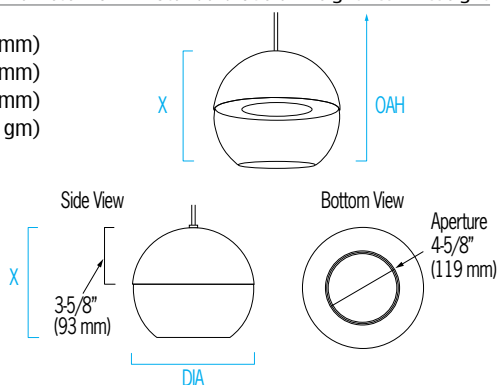


FEATURES

- High or low lumen output
- Remote driver, or surface canopy with integral driver
- Suspended via charcoal linen braided power cord
- Clear acrylic globe or genuine hand-blown glass; any blisters, seeds, or thin lines visible in this fine glass are not defects. These characteristics substantiate that this is hand crafted
- Full indirect internal illumination with no view of LED sources
- Aluminum LED plate
- Spun aluminum top cap; inside is always painted white for pure, even, internally lit appearance
- Non-VOC powder coat or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING

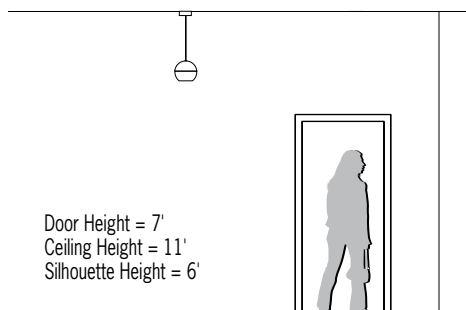

PHOTOMETRICS



ETL Listed

5 Year Warranty

CP6900 MUSe (cont.)



Fill in shaded boxes using information listed below

CP6900		MVOLT					
MODEL	SOURCE ¹ L27K(H) L27K(L) L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	VOLTAGE MVOLT	FINISH See last page for finish order codes	GLOBE MATERIAL ² ACRYLIC GLASS	DRIVER ³ RMD SDC	OPTION ⁴ DCC	OAH ⁵ See page 1
	80+ CRI standard except L27K sources 90+ CRI standard for 27K sources						

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI (L27 sources are minimum 90CRI), within 3-step MacAdam

Source	CCT Range	Globe Material	Delivered Lumens	Power (Watts)
L27K(H)	2700K	Acrylic	560	15
		Glass	520	
L27K(L)	2700K	Acrylic	330	8
		Glass	300	
L30K(H)	3000K	Acrylic	570	15
		Glass	520	
L30K(L)	3000K	Acrylic	330	8
		Glass	310	
L35K(H)	3500K	Acrylic	590	15
		Glass	540	
L35K(L)	3500K	Acrylic	350	8
		Glass	320	
L40K(H)	4000K	Acrylic	610	15
		Glass	560	
L40K(L)	4000K	Acrylic	360	8
		Glass	330	

VOLTAGE

MVOLT	120-277VAC, 50/60 Hz
-------	----------------------

LUMEN MAINTENANCE RATING

L70 (reported)	>72,000 hrs
----------------	-------------

GLOBE MATERIAL² (Select one)

Acrylic	Clear Acrylic Globe
Glass	Clear Glass Globe

DRIVER³ (Select one)

See page 3 for more information

SDC	Surface canopy with integral driver; canopy is painted white
RMD	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC). Canopy is painted white.

OPTION⁴


⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
-----	---

CP6900 MUSe (cont.)



REMOTE DRIVER (RMD) INFORMATION

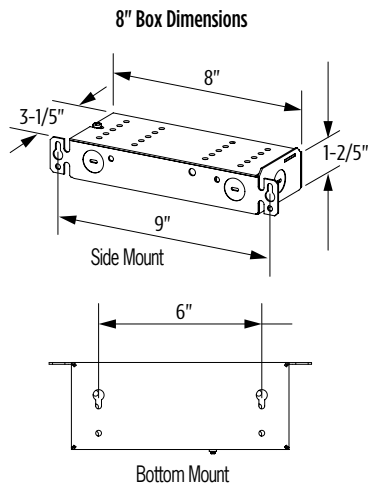


Maximum Recommended Remote Wiring Distance from RMD to fixture canopy

- 12GA 190 ft
- 14GA 120 ft
- 16GA 75 ft
- 18GA 45 ft
- 20GA 30 ft

Remote driver boxes have knockouts for conduit connections

DRIVER AND CANOPY DETAIL

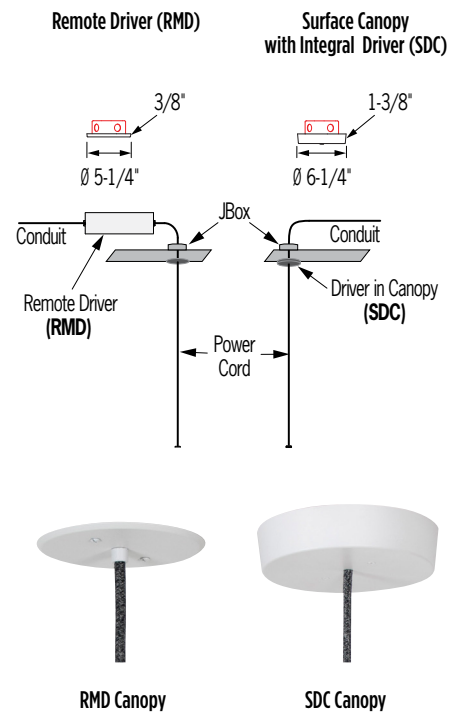

SUGGESTED VARIATIONS

- Remove glass
- Cord color
- Custom Color

CP6900 MUSE (cont.)

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes


Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

			
BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
			
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)


BA Brushed Aluminum