

OW3942 SANIBEL™

Outdoor Sconce



[VisaLighting.com/products/Sanibel](https://www.VisaLighting.com/products/Sanibel)

Type: _____ Project: _____ Location: _____




DIMENSIONS¹

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth


	OW3942-14	OW3942-26
W	14-3/4" (375 mm)	26-1/2" (673 mm)
H	2-1/8" (54 mm)	
D	2-7/8" (73 mm)	3-1/4" (83 mm)




FEATURES

- Die cast aluminum housing
- Frosted acrylic lens
- May be mounted in uplight or downlight orientation
- High and low lumen output options
- Optional 90+ CRI
- Dimmable 0-10V to 1%
- Remote driver standard and included
- Easily cleaned slim profile
- IP54 rated
- Non-VOC powder coat paint finish
- ETL listed for wet locations


RELATIVE SCALE DRAWING

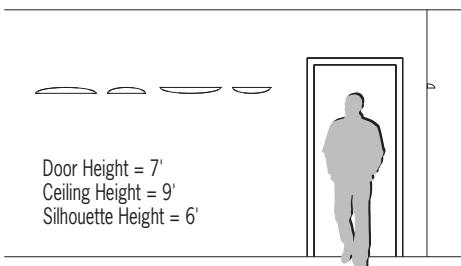

PHOTOMETRICS



Downlight



Uplight



ADA Compliant



ETL Listed



5 Year Warranty

OW3942 SANIBEL (cont.)

Outdoor Sconce



Fill in shaded boxes using information listed below

				- MVOLT			
MODEL¹ OW3942-14 OW3942-26 See page 1	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	SOURCE OPTION³ 90CRI Minimum 80CRI is standard if option is not selected	VOLTAGE MVOLT	MOUNTING OPTION⁴ NOJBC JBC2 JBC4	FINISH See last page for finish order codes		

SOURCE² (Select one source)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	OW3942-14		OW3942-26	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K(H)	3000K	950	22	1900	43
L30K(L)	3000K	450	9	950	15
L35K(H)	3500K	1000	22	2000	43
L35K(L)	3500K	500	9	1000	15
L40K(H)	4000K	1000	22	2000	43
L40K(L)	4000K	500	9	1000	15

LUMEN MAINTENANCE RATING

L85 (reported)	≥60,000 hrs
-----------------------	-------------

Reported Lifetime per IES TM-21



SOURCE OPTION³

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 15%)
--------------	--

MOUNTING OPTION⁴ (Select one)


NOJBC	Mounting plate used when not mounting over any standard junction box
JBC2	Junction box cover for use with an existing 2"x4" rectangular junction box (by others). Painted to match finish
JBC4	Junction box cover (4-1/2" square) for use with an existing 4" octagonal junction box (by others). Painted to match finish

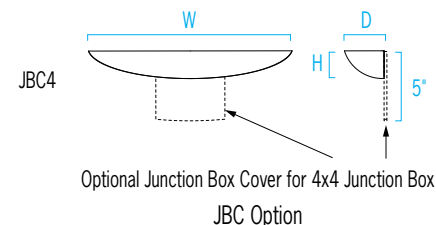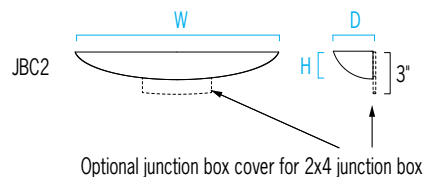

Maximum Recommended Remote Wiring Distance from Remote Driver to Fixture

Wire Size AWG	Maximum Remote Distance in Feet	
	CB3924-14	CB3942-26
12GA	550	300
14GA	350	175
16GA	225	100
18GA	125	75

REMOTE DRIVER DETAILS

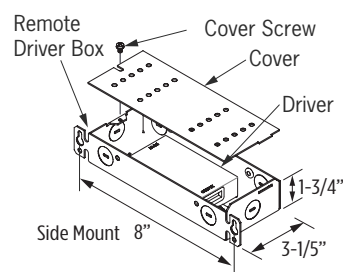

OW3942 SANIBEL (cont.)

Outdoor Sconce



SANIBEL PRODUCT FAMILY

High Abuse/ Behavioral Health	14"	• CB3944-14
	26"	• CB3944-26
Indoor – Non- Behavioral Health	14"	• CB3942-14
	26"	• CB3942-26
Outdoor	14"	• OW3942-14
	26"	• OW3942-26

SUGGESTED VARIATIONS

- Custom colors
- Tunable white
- RGB or RGBW

See [Visalighting.com/products/Sanibel](https://visalighting.com/products/Sanibel) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red