

CM1910-T UNITY™ SLOT

3" Dual Overbed Units – Tunable



VisaLighting.com/Families/Unity

Type: _____ Project: _____ Location: _____





Set includes 2 units in tandem. Order one model number per set

DIMENSIONS

W = Weight L = Length D = Depth RD = Recessed Depth


W	3"	(76 mm)
L	47-3/4"	(1213 mm)
D	4"	(102 mm)
RD	4"	(102 mm)




FEATURES

- Integral drivers
- 90+ CRI
- Dimming/switching interface accessory available for pillow speaker/nurse call systems
- Separate 0-10V control of dimming and CCT for each function
- Left and right models wired discretely; units may be wired together in the field
- Chicago Plenum certified
- Recessed depth minimizes interference with systems within ceiling plenum
- Formed acrylic lenses
- Snap-in acrylic lens for toolless access
- Not suitable for insulation contact
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications


PHOTOMETRICS



Ambient




Ambient and Exam



Exam

RELATIVE SCALE DRAWING

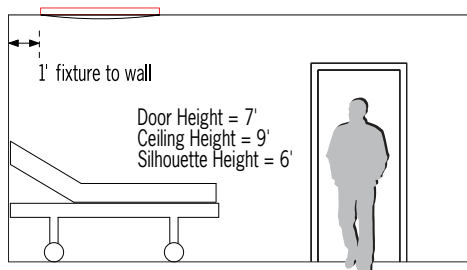

ETL Listed

5 Year Warranty

CM1910-T UNITY SLOT (cont.)

3" Dual Overbed Units – Tunable



Available Only as a Dual Overbed Set (Set includes two units in tandem)

Fill in shaded boxes using information listed below

CM1910-T	TUN2	-					
MODEL	SOURCE	VOLTAGE ¹		FINISH		MOUNTING ²	
		120V 277V		(for FLGD option)		FLGD (select finish) SBAR TBAR	
				See last page for finish order codes			

SOURCE

Dimmable 0-10V to 10%
Minimum 90CRI, 3-step MacAdam (2700K-6500K)

Source	CCT Range	Delivered Lumens*		Power (Watts)
TUN2	2700K-6500K	Ambient	5100	55
		Exam	7100	84
		Combined	12000	138

*Delivered lumens at 3500K. Lumen output will vary slightly across CCT tuning range.

Note: Fixture provided with separate ambient and exam circuits

VOLTAGE¹ (Select one)

120V	120V, 50/60 Hz
277V	277V, 50/60 Hz

MOUNTING OPTION² (Select one)

FLGD	Flanged drywall ceiling (Select finish color)
SBAR	Screw slot lay-in t-grid ceiling
TBAR	9/16" and 15/16" standard lay-in t-grid ceiling

ACCESSORY (Order separately)

LVPC-DIM	Low voltage patient control interface (3 load with dimming) requires minimum of one switch per zone (by others), mounts in electrical box (by others)
----------	---

CM1910-T UNITY SLOT (cont.)

3" Dual Overbed Units – Tunable



UNITY SLOT PRODUCT FAMILY

Wall Units	<ul style="list-style-type: none"> • CB1911-T – 3" Tunable Slot Sconce • CB1911-W – 3" Slot Sconce
Ceiling Mount Units	<ul style="list-style-type: none"> • CM1910-W – 3" Tandem Overbed Units • CM1910-T – 3" Tunable Tandem Overbed Units • CM1911-W – 3" Single Slot Ceiling Unit • CM1911-T – 3" Tunable Slot Ceiling Unit

See [Visalighting.com/families/Unity-Healthcare-Lighting](https://visalighting.com/families/Unity-Healthcare-Lighting) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red