CM1910-W UNITY™ SLOT

3" Dual Overbed Units



VisaLighting.com/Families/Unity

Type: Project: Location:







Set includes 2 units in tandem. Order one model number per set

DIMENSIONS

W = Weight L = Length D = DepthRD = Recessed Depth




RELATIVE SCALE DRAWING



FEATURES

- Integral drivers
- Optional 90+ CRI
- Dimming/switching interface accessory available for pillow speaker/nurse call systems
- Left and right models wired discretely; units may be wired together in the field
- Chicago Plenum certified
- Recessed depth minimizes interference with systems within ceiling plenum
- Formed acrylic lenses
- Snap-in acrylic lens for tool-less access
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications


PHOTOMETRICS






Exam

CM1910-W UNITY SLOT (cont.)





Sold Only as a Dual Overbed Set (Set includes two units in tandem)

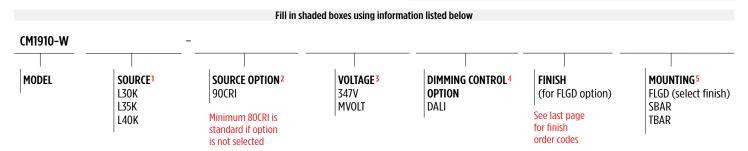

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	Delivered Lumens							
Source	Ambient	Exam	Combined					
L30K	5300	7600	12700					
L35K	5400	7800	13100					
L40K	5600	8000	13400					
Power (Watts)	57	89	144					

Note: Fixture provided with separate ambient and exam circuits

VOLTAGE³ (Select one)

MVOLT	120-277V, 50/60 Hz					
347V	347V, 50/60 Hz					

SOURCE OPTION²

80 CRI within 3-step MacAdam is standard if option is not selected

90CRI Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)

DIMMING CONTROL OPTION4

▲ Option availability may be interdependent with Voltage, Source or Other Options Dimmable to 1% if no dimming option is selected

DALI Control via DALI protocol, dimming to minimum 1% (not available with 347V)

MOUNTING⁵ (Select one)

FLGD	Flanged drywall ceiling (Select finish color)					
SBAR	Screw-slot lay-in t-grid ceiling					
TBAR	9/16" and 15/16" standard lay-in t-grid ceiling					

ACCESSORY (Order separately)

LVP	C-DIM	Low voltage patient control interface (3 load with dimming) requires minimum of one switch
		per zone (by others), mounts in electrical box (by others). Not compatible with -DALI option

CM1910-W UNITY SLOT (cont.)





UNITY SLOT PRODUCT FAMILY

Wall III ii	• CB1911-T — 3" Tunable Slot Sconce						
Wall Units	• CB1911-W — 3" Slot Sconce						
	\bullet CM1910-W $-$ 3" Tandem Overbed Units						
Ceiling	• CM1910-T — 3" Tunable Tandem Overbed Units						
Mount Units	• CM1911-W — 3" Single Slot Ceiling Unit						
	• CM1911-T — 3" Tunable Slot Ceiling Unit						

See Visalighting.com/families/Unity-Healthcare-Lighting for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red