
CM1911-W UNITY™ SLOT

3" Single Recessed Ceiling Unit



VisaLighting.com/Families/Unity


Type: Project: Location:

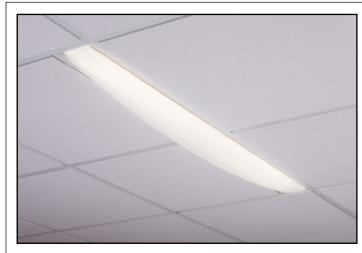




DIMENSIONS

W = Weight L = Length D = Depth RD = Recessed Depth WT = Weight







FEATURES

- Integral drivers
- Optional 90+ CRI
- Formed acrylic lenses
- Snap-in acrylic lens for toolless access
- Drywall and T-Grid mounting
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING



PHOTOMETRICS









CM1911-W UNITY SLOT (cont.)

3" Single Recessed Ceiling Unit



Fill in shaded boxes using information listed below CM1911-W MODEL SOURCE1 **SOURCE OPTION² VOLTAGE³** DIMMING CONTROL⁴ **MOUNTING5 FINISH** L30K(H) 90CRI 347V OPTION (for FLGD option) FLGD (select finish) MVOLT L30K(L) DALI SBAR Minimum 80CRI is See last page L35K(H) **TBAR** standard if option for finish L35K(L) is not selected order codes L40K(H) L40K(L)

SOURCE1 (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens	Power (Watts)
L30K(H)	3000K	3900	42
L30K(L)	3000K	1950	19
L35K(H)	3500K	4000	42
L35K(L)	3500K	2000	19
L40K(H)	4000K	4100	42
L40K(L)	4000K	2000	19

VOLTAGE³ (Select one)

MVOLT	120-277V, 50/60 Hz				
347V	347V, 50/60 Hz				

SOURCE OPTION²

80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered
	lumens reduced by 5%)

DIMMING CONTROL OPTION⁴


▲ Option availability may be interdependent with Voltage, Source or Other Options Unit is 0-10V dimmable to 1% if no dimming option is selected

DALI	Control via DALI protocol, dimming to minimum 1% (not available with 347V)

MOUNTING OPTION⁵ (Select one)

FLGD	Flanged drywall ceiling (Select finish color)					
SBAR	Screw-slot lay-in t-grid ceiling					
TBAR	9/16" and 15/16" standard lay-in t-grid ceiling					

CM1911-W UNITY SLOT (cont.)





UNITY SLOT PRODUCT FAMILY

147 - II II 14	• CB1911-T — 3" Tunable Slot Sconce						
Wall Units	• CB1911-W — 3" Slot Sconce						
	ullet CM1910-W $-$ 3" Tandem Overbed Units						
Ceiling	\bullet CM1910-T $-$ 3" Tunable Tandem Overbed Units						
Mount Units	ullet CM1911-W $-$ 3" Single Slot Ceiling Unit						
	• CM1911-T — 3" Tunable Slot Ceiling Unit						

See Visalighting.com/families/Unity-Healthcare-Lighting for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR Shoreline Grey	
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red