

CB1904 UNITY™

49" Headwall



Visalighting.com/products/Indoor/Unity

Type: _____ Project: _____ Location: _____




DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth


W	49"	(1245 mm)
H	7-1/4"	(184 mm)
D	7-1/8"	(181 mm)

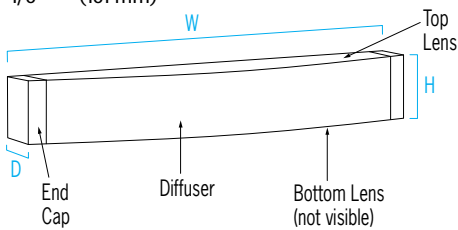


FEATURES

- Optional Amber night light option to minimize patient disturbance
- Optional 90+ CRI (delivered lumens reduced by 5%)
- LVPC-DIM switching interface accessory available for pillow speaker/nurse call systems
- Separately switched
- Servicable without removal from wall
- Clear top lens for ambient uplight; bottom lens provides diffuse downlight for reading
- Easy to clean OLIN (oyster linen) Lumicor® acrylic diffuser or matte white acrylic diffuser
- Diffusers are UV-stabilized
- Optional antimicrobial coating (no VOC) for all interior and exterior painted surfaces
- ETL listed for damp locations. Not suitable for exterior applications

RELATIVE SCALE DRAWING

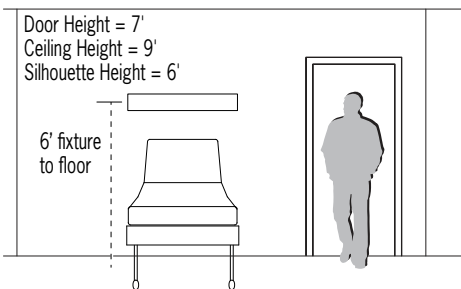

PHOTOMETRICS

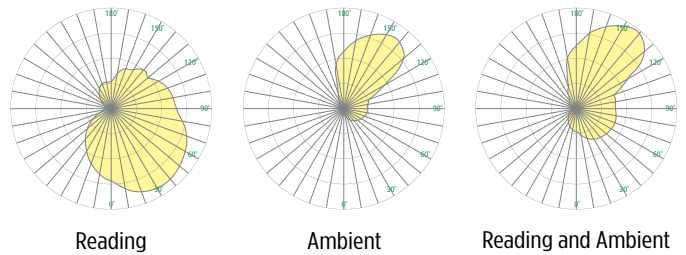

CB1904 UNITY (cont.)

49" Headwall



Fill in shaded boxes using information listed below

CB1904		-		MVOLT							
MODEL	SOURCE¹ • L30K • L35K • L40K	VOLTAGE MVOLT	SOURCE OPTION(S)² 90CRI NGT	END CAP FINISH See last page for finish order codes	DIFFUSER(S)³ MWAC • OLIN	OPTION(S)⁴ AMC CH XPS					

SOURCE¹ (Select one)


Dimmable 0–10V to 1%, Minimum 80CRI, within 3–step MacAdam

Source	CCT	Reading		Ambient		Total	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K	3000K	2400	23	5000	44	7400	67
L35K	3500K	2500		5100		7600	
• L40K	4000K	2500		5100		7600	

Note: Fixture provided with separate reading, ambient, and exam circuits

VOLTAGE

MVOLT	120–277V, 50/60 Hz
--------------	--------------------

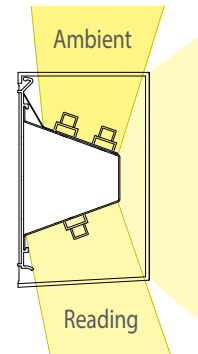

- Split optic is angled for directional output
- Hammertone reflector

SOURCE OPTIONS² (Multiple selections allowed)

90CRI	Color rendering index 93; minimum R9 value of 50 (lumen output reduced by 5%) Minimum 80CRI within 3–step MacAdam is standard if option is not selected
NGT	Night Light (amber)

DIFFUSERS³ (Select one)

MWAC	Matte White Acrylic
OLIN	Lumicor Oyster Linen Acrylic



OPTIONS⁴ (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

AMC	Antimicrobial coating (no VOC) for painted surfaces (for trim)
CH	Pull Chain (120V only)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

ACCESSORY (Order Separately)

LVPC-DIM	Low voltage patient control interface (3 load with dimming) requires minimum of one switch per zone (by others), mounts in electrical box (by others)
-----------------	---

CB1904 UNITY (cont.)

49" Headwall



UNITY PRODUCT FAMILY

Wall Sconce	12"	ADA	CB1900
Wall Sconce	12" (Top and Bottom Lens)		CB1902
Headwall	49"		CB1904
Overbed	24" x 24"	With Reading	CM1900
		Without Reading	CM1901
	24" x 48"		CM1906
	9" x 48"	Tandem	CM1912
Table Lamp	Fixed Base		TF1904
	Freestanding		TF1906
	Charging Base		TF1908

SUGGESTED VARIATIONS

- Increase or decrease fixture width
- Row mount up to 3 units
- Nominal 2'/3' sizes
- 2700K

See [Visalighting.com/families/Unity-healthcare-lighting](https://visalighting.com/families/Unity-healthcare-lighting) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red