CM1978-T SYMMETRY™
Behavioral Health/High Abuse - Tunable

VISA LIGHTING

VisaLighting.com/products/Symmetry

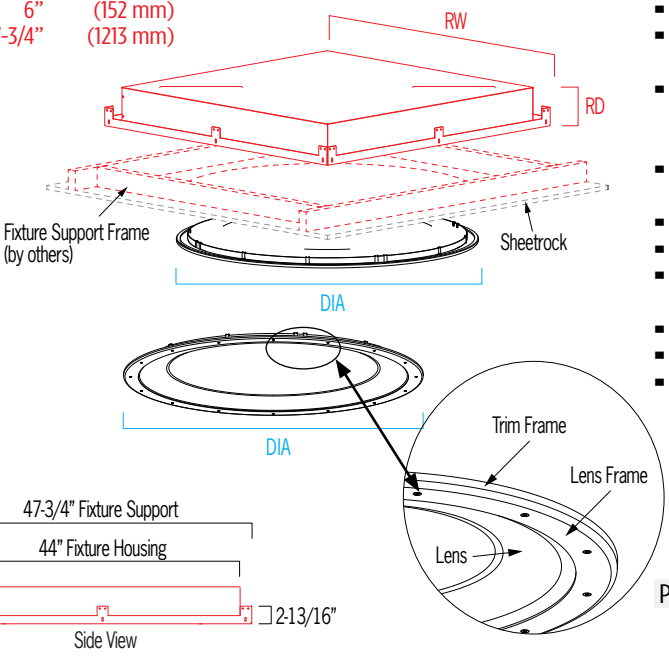Type: _____ Project: _____ Location: _____

DIMENSIONS

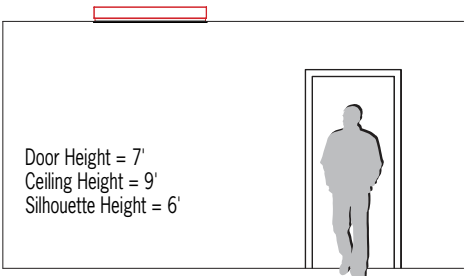DIA = Diameter   RD = Recessed Depth   RW = Recessed Width

DIA	45-11/16"	(1160 mm)
RD	6"	(152 mm)
RW	47-3/4"	(1213 mm)

RW

RD

Fixture Support Frame (by others)

Sheetrock

DIA

DIA

Trim Frame

Lens Frame

Lens

47-3/4" Fixture Support

44" Fixture Housing

RD

2-13/16"

Side View

RELATIVE SCALE DRAWING

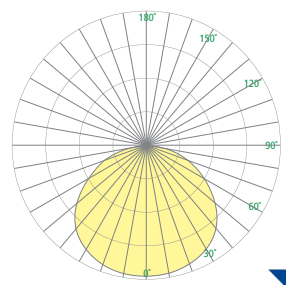Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'

FEATURES

- Integral driver located within the housing and accessible from below the ceiling
- 90+ CRI
- Remote emergency driver
- Two channel tunable control capabilities provides independent control of CCT and dimming using two separate 0-10V controllers (by others)
- High Abuse lens and frame features 3/16" thick, high impact clear polycarbonate secured with tamper resistant fasteners; tested to >100 joules impact
- Ligature resistant; sheetrock/drywall installation (see installation instructions), not suited for grid ceiling installation
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
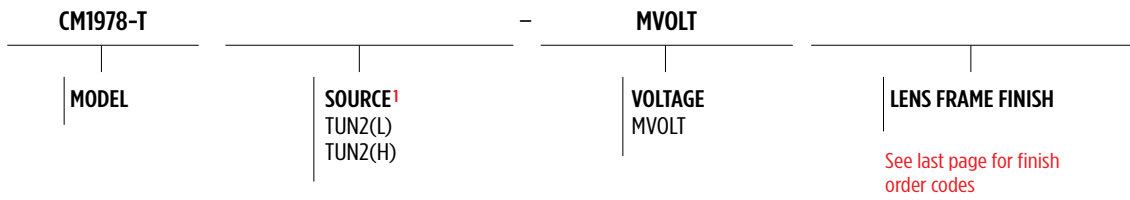- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS

BAA Buy American Compliant

ETL Listed c(ETL)us

5 5 Year Warranty

CM1978-T SYMMETRY (cont.)
Behavioral Health/High Abuse - Tunable

Fill in shaded boxes using information listed below

CM1978-T	–	MVOLT	
MODEL	**SOURCE**[1] TUN2(L) TUN2(H)	**VOLTAGE** MVOLT	**LENS FRAME FINISH** See last page for finish order codes

SOURCE[1] (Select one)

Dimmable 0-10V to 10%
Minimum 90CRI, within 3-step MacAdam (2700K-6500K)

Source	CCT Range	Delivered Lumens	Power (Watts)
TUN2(L)	2700K-6500K	2800	27
TUN2(H)	2700K-6500K	4800	47

Delivered lumens shown at 3500K. Lumen output may vary slightly
at other CCT settings

VOLTAGE

MVOLT	120-277V, 50/60 Hz

CM1978-T SYMMETRY™
Behavioral Health/High Abuse - Tunable

VISA LIGHTING

SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 — 4"
Behavioral Health – Overbed	CM1976-W — 45"
	CM1986-W — 23"
Behavioral Health – General Use	CM1978-W — 45"
	CM1988-W — 23"
Behavioral Health – Tunable	CM1978-T — 45"
	CM1988-T — 23"
Overbed	CM1970-W — 45"
	CM1980-W — 23"
General Use	CM1972-W — 45"
	CM1982-W — 23"
Tunable	CM1972-T — 45"
	CM1982-T — 23"

See Visalighting.com/Families/Symmetry **for more information**

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are available upon request.
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

Code	Name	Code	Name	Code	Name	Code	Name	Code	Name	Code	Name	Code	Name	Code	Name
AGGY	Agate Grey	**ALGN**	Alpine Green	**BJBG**	Baja Beige	**BMAT**	Bronze Matte	**BRNZ**	Bronze	**BSIL**	Blade Silver	**CVBL**	Cove Blue
DEOR	Deoro Gold	**GLWT**	Glacier White	**GSIL**	Graphite Siver	**HRGR**	Harbor Grey	**JTBK**	Jet Black	**OCBL**	Ocean Blue	**SHGR**	Shoreline Grey
SBGN	Sagebrush Green	**SLGR**	Slate Grey	**SSTP**	Sierra Taupe	**TRCN**	Terracotta Canyon	**TRWT**	Traffic White	**VBLK**	Velvet Black	**VNRD**	Vineyard Red