


# CM1982-T SYMMETRY™

23" General Use - Tunable



[VisaLighting.com/products/Symmetry](https://VisaLighting.com/products/Symmetry)


Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

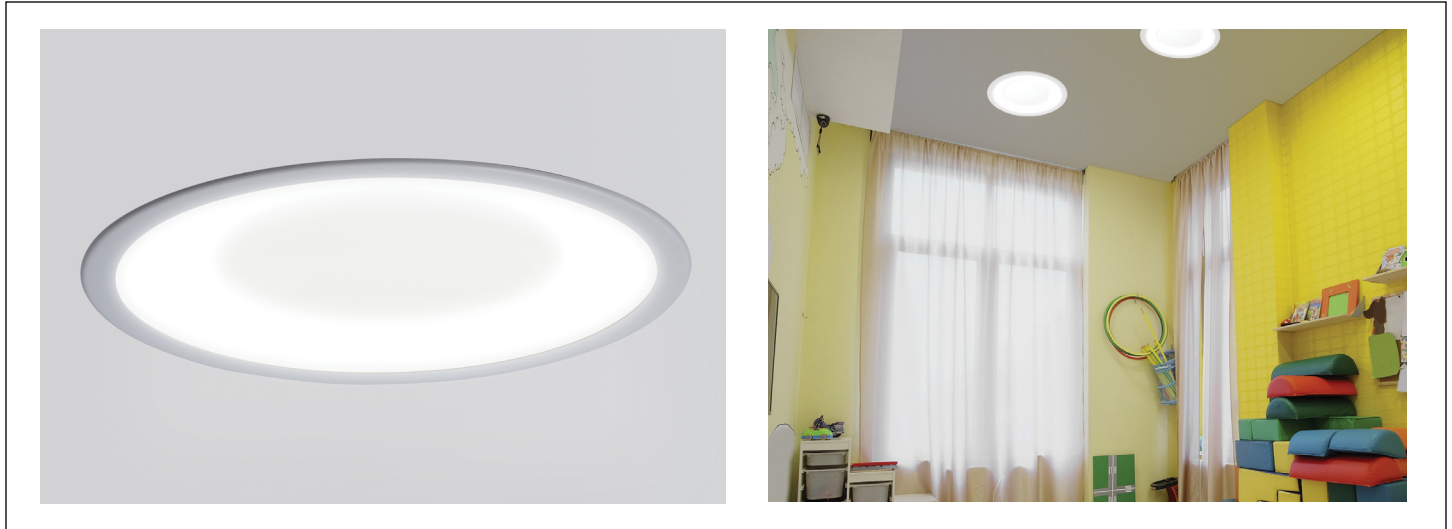


## DIMENSIONS

DIA = Diameter RD = Recessed Depth RW = Recessed Width

DIA	22-7/8"	(581 mm)
RD	6-1/2"	(165 mm)
RW	23-1/2"	(597 mm)

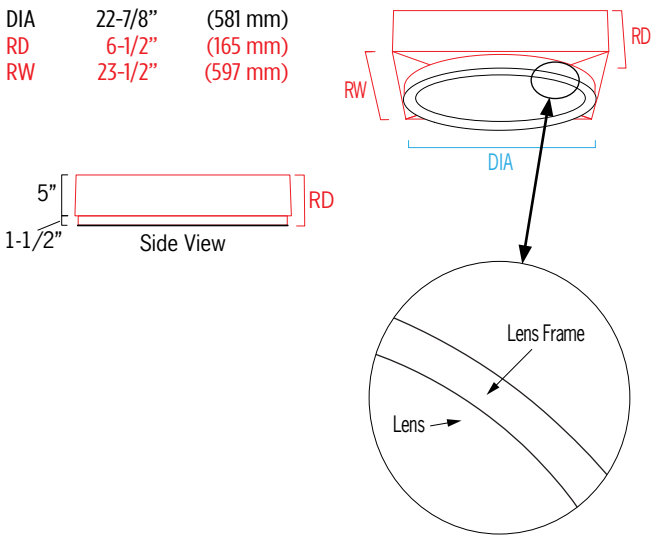


## RELATIVE SCALE DRAWING

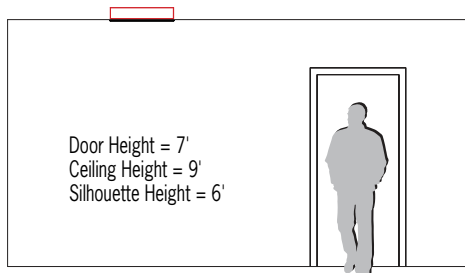

## FEATURES

- Integral driver located within the housing and accessible from below the ceiling
- 90+ CRI
- Remote emergency driver
- Two Channel Tunable control capabilities provides independent control of CCT and dimming using two separate 0-10V controllers (by others)
- Suitable for drywall/sheetrock or T-bar grid system (see installation instructions)
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint finish
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

## PHOTOMETRICS

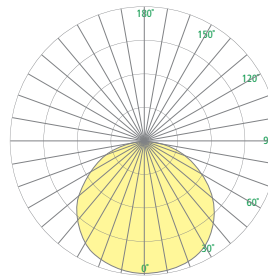

# CM1982-T SYMMETRY (cont.)

## 23" General Use - Tunable



Fill in shaded boxes using information listed below

CM1982-T		-	MVOLT		
MODEL	SOURCE <sup>1</sup> TUN2(L) TUN2(H)		VOLTAGE MVOLT	LENS FRAME FINISH  See last page for finish order codes	OPTION <sup>2</sup> REM

### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 10%

Minimum 90CRI, within 3-step MacAdam (2700K-6500K)

Source	CCT Range	Delivered Lumens	Power (Watts)
TUN2(L)	2700K-6500K	3000	35
TUN2(H)	2700K-6500K	5000	63

Delivered lumens shown at 3500K. Lumen output may vary slightly at other CCT settings

### VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

### OPTION<sup>2</sup> (Multiple selections allowed)

REM	Remote emergency driver, 10W output for 90 minutes
-----	--

# CM1982-T SYMMETRY (cont.)

## 23" General Use - Tunable



### SYMMETRY PRODUCT FAMILY

<b>Behavioral Health – 4" Downlight</b>	CM2500 – 4"
<b>Behavioral Health – Overbed</b>	CM1976-W – 45"
	CM1986-W – 23"
<b>Behavioral Health – General Use</b>	CM1978-W – 45"
	CM1988-W – 23"
<b>Behavioral Health – Tunable</b>	CM1978-T – 45"
	CM1988-T – 23"
<b>Overbed</b>	CM1970-W – 45"
	CM1980-W – 23"
<b>General Use</b>	CM1972-W – 45"
	CM1982-W – 23"
<b>Tunable</b>	CM1972-T – 45"
	CM1982-T – 23"

See [Visalighting.com/Families/Symmetry](https://visalighting.com/Families/Symmetry) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.