CM1988-T SYMMETRY™

Behavioral Health/High Abuse — 23" General Use - Tunable



VisaLighting.com/products/Symmetry

Type: Project: Location:









DIMENSIONS


DIA = Dia	meter	RD = Recessed Depth	RW = Recessed Width
DIA RD RW	23-1/2" 6-5/8" 23-1/2"	(597 mm) (168 mm) (597 mm)	
			RW
	Fixt (by	ure Support Frame others)	Sheetrock
RD	0		DIA

FEATURES


- Integral driver located within the housing and accessible from below the ceiling
- 90+ CRI
- Remote emergency driver
- Two Channel Tunable control capabilities provides independent control
 of CCT and dimming using two separate 0-10V controllers (by others)
- High Abuse lens and frame features 3/16" thick, high impact clear polycarbonate secured with tamper resistant fasteners; tested to >100 joules impact
- Ligature resistant; sheetrock/drywall installation (see installation instructions), not suited for grid ceiling installation
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint finish
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior application

RELATIVE SCALE DRAWING

Side View



PHOTOMETRICS











CM1988-T SYMMETRY (cont.)





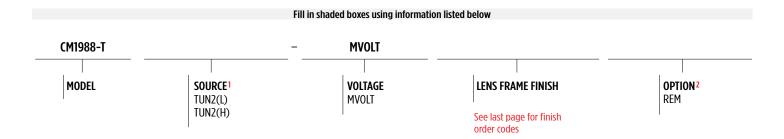

SOURCE¹ (Select one)

Dimmable 0-10V to 10%

Minimum 90CRI, within 3-step MacAdam (2700K-6500K)

miniani social, mani socioli nacitadini (270011 osocii)										
Source	CCT Range	Delivered Lumens	Power (Watts)							
TUN2(L)	2700K-6500K	2700	35							
TUN2(H)	2700K-6500K	4500	63							

Delivered lumens shown at 3500K. Lumen output may vary slightly

Delivered farriers shown at 350011. Earlier output may	vary singriting
at other CCT settings	

OPTION2

REM	Remote emergency driver, 10W output for 90 minutes	
	= ' ' '	

MVOLT	120-277V, 50/60 Hz
	120 277 1, 50, 50 112

CM1988-T SYMMETRY (cont.)



Behavioral Health/High Abuse — 23" General Use - Tunable

SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 — 4"				
Behavioral Health –	CM1976-W — 45"				
Overbed	CM1986-W — 23"				
Behavioral Health –	CM1978-W — 45"				
General Use	CM1988-W — 23"				
Behavioral Health –	CM1978-T — 45"				
Tunable	CM1988-T — 23"				
Overbed	CM1970-W — 45"				
Overbed	CM1980-W — 23"				
General Use	CM1972-W — 45"				
General USE	CM1982-W — 23"				
Tunable	CM1972-T — 45"				
Tunable	CM1982-T — 23"				

See Visalighting.com/Families/Symmetry for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are available upon request. For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOD	Deoro Gold	GLWT	Glacier White	COII	Graphite Siver	ирср	Harbor Croy	JTBK	lot Plack	OCBI	Ocean Plue	SUCD	Sharalina Cray
DEOR	Deoro Goid	GLWI	diddler writte	GSIL	diaprille Siver	HRGR	Harbor Grey	JIBN	Jet Black	OCBL	Ocean Blue	энчк	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.