

# CM1988-W SYMMETRY

Behavioral Health/High Abuse — 23” General Use - White



[VisaLighting.com/products/Symmetry](https://www.VisaLighting.com/products/Symmetry)


Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




## DIMENSIONS

DIA = Diameter    RD = Recessed Depth    RW = Recessed Width

DIA	23-1/2"	(597 mm)
RD	5"	(127 mm) (no insulation detector required)
RW	23-1/2"	(597 mm)

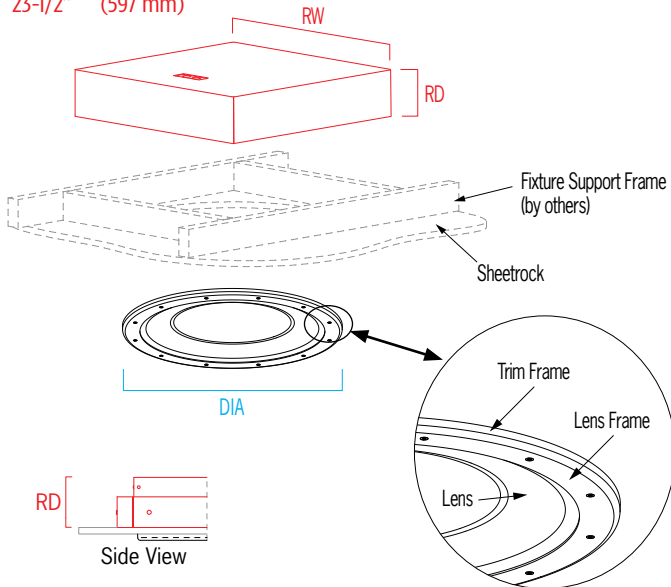


## RELATIVE SCALE DRAWING

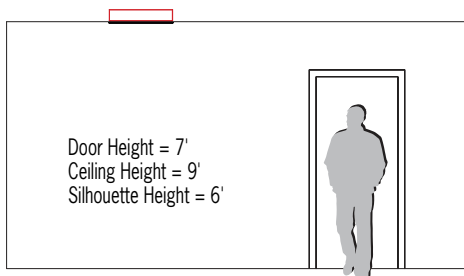

## FEATURES

- Integral driver located within the housing and accessible from below the ceiling
- Remote emergency driver
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Suitable for insulation contact
- High Abuse lens and frame features 3/16" thick, high impact clear polycarbonate secured with tamper resistant fasteners; tested to >100 joules impact
- Ligature resistant; sheetrock/drywall installation (see installation instructions), not suited for grid ceiling installation
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint finish
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

## PHOTOMETRICS

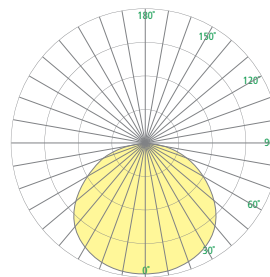

# CM1988-W SYMMETRY (cont.)

## Behavioral Health/High Abuse — 23" General Use - White



Fill in shaded boxes using information listed below

CM1988-W	- MVOLT					
MODEL	SOURCE <sup>1</sup>	SOURCE OPTION <sup>2</sup>	VOLTAGE	DIMMING CONTROL <sup>3</sup>	LENS FRAME FINISH	OPTION <sup>4</sup>
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI  Minimum 80CRI is standard if 90CRI option is not selected	MVOLT	DALI		REM  See last page for finish order codes

### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%  
Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	4400	61
L30K(L)	3000K	2600	35
L35K(H)	3500K	4500	61
L35K(L)	3500K	2700	35
L40K(H)	4000K	4600	61
L40K(L)	4000K	2700	35

347V available upon request

### VOLTAGE

MVOLT	
	120-277V, 50/60 Hz

### SOURCE OPTION<sup>2</sup>

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	
	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)

### DIMMING CONTROL OPTION<sup>3</sup>

Dimmable 0-10V to 1% is standard if DALI option is not selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

DALI	
	Control via DALI protocol, dimming to minimum 1%

### OPTION<sup>4</sup>

REM	
	Remote emergency driver, 10W output for 90 minutes

# CM1988-W SYMMETRY (cont.)

## Behavioral Health/High Abuse — 23" General Use - White



### SYMMETRY PRODUCT FAMILY

<b>Behavioral Health – 4" Downlight</b>	CM2500 – 4"
<b>Behavioral Health – Overbed</b>	CM1976-W – 45"
	CM1986-W – 23"
<b>Behavioral Health – General Use</b>	CM1978-W – 45"
	CM1988-W – 23"
<b>Behavioral Health – Tunable</b>	CM1978-T – 45"
	CM1988-T – 23"
<b>Overbed</b>	CM1970-W – 45"
	CM1980-W – 23"
<b>General Use</b>	CM1972-W – 45"
	CM1982-W – 23"
<b>Tunable</b>	CM1972-T – 45"
	CM1982-T – 23"

See [Visalighting.com/Families/Symmetry](https://visalighting.com/Families/Symmetry) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red