


CM1922 SERENITY™

2' x 2' Behavioral Health/High Abuse Overbed



VisaLighting.com/products/indoor/Serenity



Type: _____ Project: _____ Location: _____

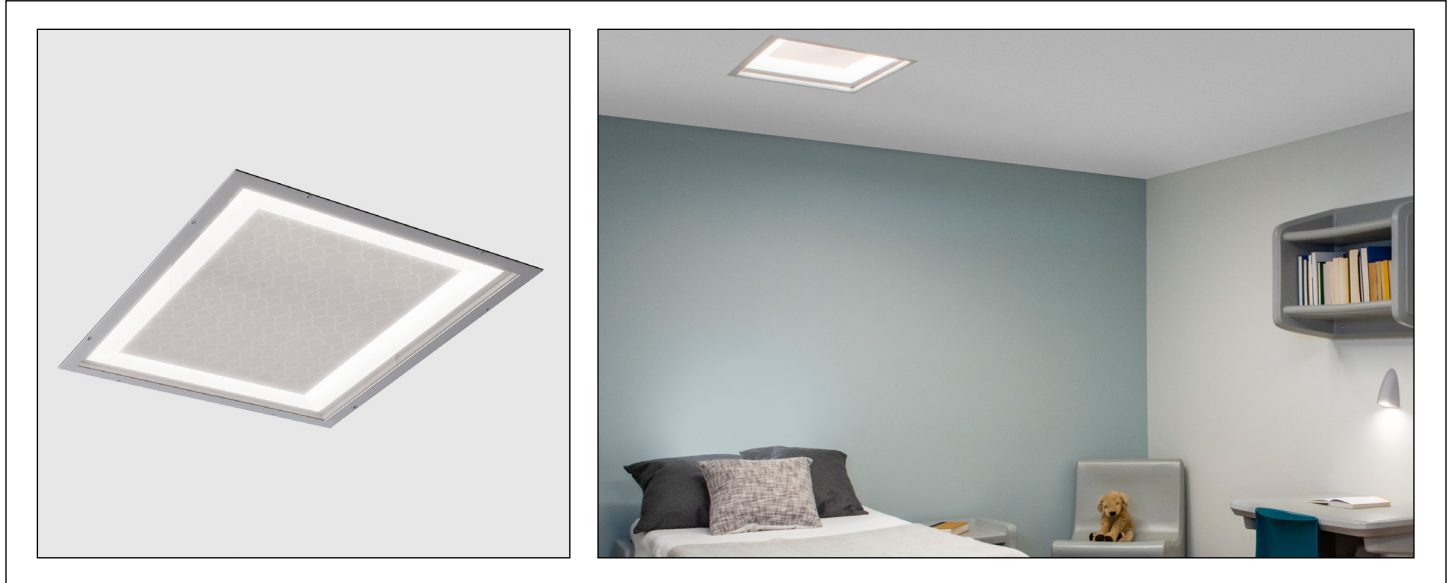

DIMENSIONS

W = Width L = Length RD = Recessed Depth


| | |
|----|------------------|
| W | 25-1/8" (638 mm) |
| L | 25-1/8" (638 mm) |
| RD | 3-1/2" (89 mm) |

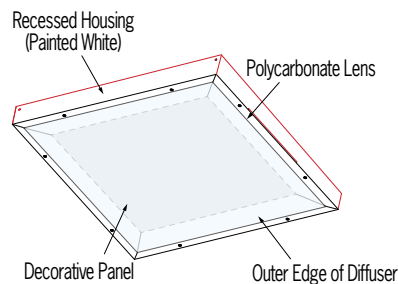


FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Driver located within the housing and accessible from below the ceiling
- Low voltage patient control (LVPC-DIM) switching interface accessory available for pillow speaker/nurse call systems (order separately – see page 2)
- Suitable for behavioral healthcare applications
- Amber night light option to minimize patient disturbance
- Behavioral health/high abuse lens and frame features 1/8" thick, high impact clear polycarbonate secured with tamper resistant fasteners; ligature resistant (sheetrock/drywall installation only)
- Shallow recessed depth minimizes interference with systems within ceiling plenum
- Housing is white (no VOC) powder coat paint
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- Outer edge of diffuser (source of light) is high transmittance matte white acrylic
- Decorative panel – choose from four calming patterns or design your own custom pattern
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING

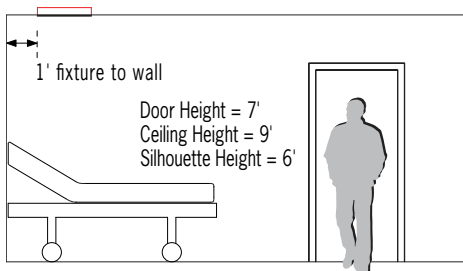

PHOTOMETRICS



Reading, Ambient, & Exam



CM1922 SERENITY (cont.)

2' x 2' Behavioral Health/High Abuse Overbed



Fill in shaded boxes using information listed below

| | | | | | | | | | | | | | |
|--------|--|--|--|--|--|-----------------------|--|-------------------------------|--|-------------------------------|--|------------------------|--|
| CM1922 | | | | | | | | | | | | | |
| MODEL | | SOURCE ¹ | | | | VOLTAGE ² | | SOURCE OPTION(S) ³ | | DECORATIVE PANEL ⁴ | | OPTION(S) ⁵ | |
| | | L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) | | | | MVOLT 120V 277V | | 90CRI NGT | | ESS ORB VCT VEN | | CP NAF | |

SOURCE^{1,2} (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

| Source | CCT | Reading | | Ambient | | Exam | | Total | | Voltage | |
|---------|-------|------------------|---------------|------------------|---------------|------------------|---------------|------------------|---------------|--------------|-------|
| | | Delivered Lumens | Power (Watts) | Delivered Lumens | Power (Watts) | Delivered Lumens | Power (Watts) | Delivered Lumens | Power (Watts) | | |
| L30K(H) | 3000K | 2700 | 47 | 2200 | 29 | 5400 | 97 | 10300 | 173 | 120V or 277V | |
| L30K(L) | 3000K | 2700 | | 2200 | | | | | 4900 | 76 | MVOLT |
| L35K(H) | 3500K | 2700 | | 2200 | | 5500 | 97 | 10400 | 173 | 120V or 277V | |
| L35K(L) | 3500K | 2700 | | 2200 | | | | | 4900 | 76 | MVOLT |
| L40K(H) | 4000K | 2800 | | 2300 | | 5600 | 97 | 10700 | 173 | 120V or 277V | |
| L40K(L) | 4000K | 2800 | | 2300 | | | | | 5100 | 76 | MVOLT |

90CRI option reduces lumen output by 12%


SOURCE OPTIONS³ (Multiple selections allowed)

| | |
|-------|---|
| 90CRI | Color rendering index 93; minimum R9 value of 50 (lumen output reduced by 5%) Minimum 80CRI within 3-step MacAdam is standard if option is not selected |
| NGT | Night Light (amber) |

DECORATIVE PANEL⁴ (Select one)

ORB and VEN options not recommended for behavioral health applications

| | | | |
|-----|---------|-----|---------|
| ESS | Essence | VCT | Vector |
| ORB | Orbit | VEN | Venture |

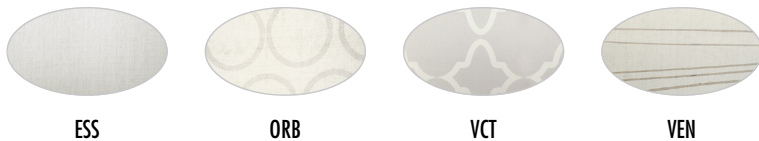


OPTIONS⁵ (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

| | |
|-----|------------------------------|
| CP | Chicago Platinum certified |
| NAF | Ceiling plane sealing gasket |

LIGHTING COMPONENT LOCATIONS

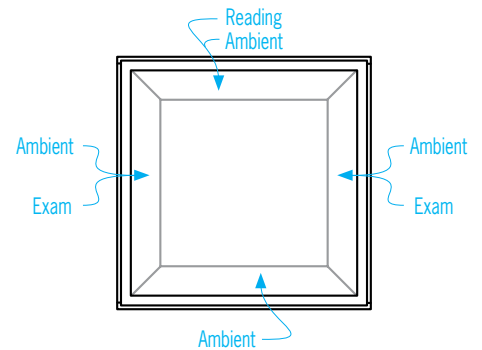

ACCESSORY (Order Separately)

| | |
|----------|---|
| LVPC-DIM | Low voltage patient control interface (3 load with dimming) requires minimum of 1 switch per zone (by others), mounts in electrical box (by others) |
|----------|---|

CM1922 SERENITY (cont.)

2' x 2' Behavioral Health/High Abuse Overbed

SERENITY PRODUCT FAMILY

| Wall Sconce | ADA | | • CB1930 |
|-------------|----------------------------------|-----------|----------|
| Headwall | | | • CB1934 |
| Overbed | Behavioral Health/ High Abuse | 24" x 24" | • CM1922 |
| | | 24" x 48" | • CM1924 |
| | Tandem | 12" x 48" | • CM1930 |
| | | 24" x 24" | • CM1938 |
| | | 24" x 48" | • CM1946 |
| Table Lamp | Fixed Base | | • TF1930 |
| | Freestanding | | • TF1932 |
| | Charging Base | | • TF1934 |

SUGGESTED VARIATIONS

- Custom graphic for decorative panel
- Alternate finish
- Increase or decrease fixture height or width

See [Visalighting.com/families/Serenity-lighting](https://visalighting.com/families/Serenity-lighting) for more information